

E326

E326

**ENERPAC** 

Powerful Solutions.  
Global Force.

**ENERPAC** 

Powerful Solutions. Global Force.



# Table of Contents

## Introduction

The World of Enerpac . . . . . 2-3

## Cylinders (Hydraulic) 4-59

Introduction . . . . . 4-5  
RC-Series, Single-Acting Cylinders . . . . . 6-9  
RC-Series, Cylinder Accessories . . . . . 10  
RA-Series,  
Aluminum Cylinders Introduction . . . . . 11  
RAC-Series,  
Single-Acting Aluminum Cylinders . . . . . 12-13  
RACL-Series, Single-Acting  
Aluminum Lock-nut Cylinders . . . . . 14-15  
RACH-Series, Single-Acting  
Aluminum Hollow Cylinders . . . . . 16-17  
RAR-Series, Double-Acting  
Aluminum Cylinders . . . . . 18-19  
CLP-Series, Single-acting  
Pancake Cylinders . . . . . 20-21  
RSM/RCS-Series, Single-Acting  
Low Height Cylinders . . . . . 22-23  
BRC-Series, Single-Acting  
Pull Cylinders . . . . . 24-25  
BRP-Series, Single-Acting  
Pull Cylinders . . . . . 24-25  
RCH-Series, Single-Acting  
Hollow Plunger Cylinders . . . . . 26-27  
RRH-Series, Double-Acting  
Hollow Plunger Cylinders . . . . . 28-29  
RD-Series, Double-Acting  
Precision Cylinders . . . . . 30-31  
RR-Series, Double-Acting  
Cylinders . . . . . 32-35  
CLSG-Series, Single-Acting  
High Tonnage Cylinders . . . . . 36-39  
CLRG-Series, Double-Acting  
High Tonnage Cylinders . . . . . 40-43  
CLL-Series, Single-Acting  
Lock Nut Cylinders . . . . . 44-47  
LB-Series Lifting Bags . . . . . 48-49  
LPC-Series Cribbing Blocks . . . . . 50-51  
JH/JHA-Series, Aluminum  
and Steel Jacks . . . . . 52  
Industrial Bottle Jacks . . . . . 53  
Pow'R Riser® . . . . . 54-55  
RC, P, V-Series,  
Extreme Environment Products . . . . . 56-57  
SC-Series, Cylinder-Pump Sets . . . . . 58-59

## Pumps and Directional Control Valves 60-115

Introduction . . . . . 60-61  
P-Series, Lightweight Hand Pumps . . . . . 62-63  
P-Series, Steel Hand Pumps . . . . . 64-65  
P-Series, Low Pressure Hand Pumps . . . . . 66-67  
P-Series, Lightweight Foot Pump . . . . . 68  
MP-Series, Multifluid Hand Pumps . . . . . 69  
P- and 11-Series, Ultra-High  
Pressure Hand Pumps . . . . . 70-71  
BP-Series, Battery Pump . . . . . 72-73  
PU-Series Economy Pumps . . . . . 74-75  
PE-Series,  
Submerged Electric Pumps . . . . . 76-79  
Z-Class Electric Pump Intro . . . . . 80-81  
ZU-Series, Electric Pumps . . . . . 82-87  
ZE-Series, Electric Pumps . . . . . 88-93  
8000-Series, Electric Pumps . . . . . 94-95  
XA-Series Air Pumps . . . . . 96-97

PA-Series, Turbo II Air Pumps . . . . . 98-99  
PA and PAM-Series,  
Air Hydraulic Pumps . . . . . 100-101  
ZA-Series, Air Hydraulic Pumps . . . . . 102-103  
ATP Ultra-Pressure Air Hydraulic Pump . . . . . 104  
PGM-Series,  
Atlas Gasoline Powered Pumps . . . . . 105  
Z-Series Gasoline Powered Pumps . . . . . 106-107  
8000-Series,  
Gasoline Powered Pumps . . . . . 108  
Pump-Mounted  
Directional Control Valves . . . . . 110-115

## System Components and Control Valves 116-133

Introduction . . . . . 116-117  
High-Pressure Hoses . . . . . 118-119  
Hydraulic Couplers . . . . . 120-121  
Hydraulic Oil,  
Manifolds and Fittings . . . . . 122-123  
GF and GP-Series, Hydraulic Force  
and Pressure Gauges . . . . . 124-125  
G and H-Series,  
Hydraulic Pressure Gauges . . . . . 126-127  
T-Series, Test System Gauges . . . . . 128  
DGR-Series, Digital Hydraulic Gauges . . . . . 129  
GA, NV, V Gauge Accessories . . . . . 130  
Accessory Applications . . . . . 131  
Flow and Pressure Control Valves . . . . . 132-133

## Hydraulic Presses 134-149

Introduction . . . . . 134-135  
IP-Series, H-Frame Presses . . . . . 136-139  
IPR-Series, Roll Frame Presses . . . . . 140-141  
A-Series Arbor, C-Clamps and IP-Series  
Bench Frame Presses . . . . . 142-143  
Hydraulic Bench Vise . . . . . 144-145  
Press Accessories . . . . . 146  
Press Speed Chart . . . . . 146  
Custom Built Presses . . . . . 147  
TM, LH Tension Meter and Load Cells . . . . . 148  
Press Application Ideas . . . . . 149

## Pullers (Mechanical and Hydraulic) 150-163

Introduction . . . . . 150-151  
BHP-Series, Hydraulic Puller Sets . . . . . 152-155  
EP and EPPMI-Series,  
Mechanical Posi-Lock® Pullers . . . . . 156-159  
EPH-Series,  
Hydraulic Posi-Lock® Pullers . . . . . 160-161  
Posi-Lock® Puller Accessories . . . . . 162  
EPH-Series,  
Posi-Lock® 100-Ton Pullers . . . . . 163

## Tools (Mechanical and Hydraulic) 164-185

Introduction . . . . . 164-165  
MS-Series, Maintenance Sets . . . . . 166-169  
SP-Series,  
35-Ton Hydraulic Punch . . . . . 170-171  
SP-Series,  
50-Ton Hydraulic Punch . . . . . 172-173  
LW-Series, Vertical Lifting Wedge . . . . . 174  
SOH-Series, Hydraulic Machine Lifts . . . . . 175  
ER, ES and EL-Series,  
Heavy-Duty Load Skates . . . . . 176-177  
CM-Series, Storage Cases . . . . . 178

A, WR-Series,  
Wedgies and Spread Cylinders . . . . . 179  
WHC and WHR-Series,  
Hydraulic Cutter Heads . . . . . 180  
WMC-Series,  
Self-Contained Hydraulic Cutters . . . . . 181  
STB-Series, Pipe Benders . . . . . 182-183  
PT, DPT-Series,  
Mono-strand Stressing Tools . . . . . 184-185

## Bolting Tools 186-223

Introduction . . . . . 186-187  
E-Series, Manual Torque Multipliers . . . . . 188-189  
S-Series, Square Drive Steel  
Torque Wrenches . . . . . 190-193  
BSH-Series Sockets . . . . . 194  
Bolting Application Ideas . . . . . 195  
W-Series, Steel Hexagon  
Cassette Torque Wrenches . . . . . 196-197  
W-Series Hexagon Cassettes . . . . . 198-202  
W-Series Accessories . . . . . 203  
T/W Pump Selection Chart . . . . . 204  
PMU-Series, Portable Electric  
Torque Wrench Pumps . . . . . 205  
ZU4 Electric Torque Wrench Pumps . . . . . 206-209  
ZE-Series Torque Wrench Pumps . . . . . 210-211  
PTA-Series, Pneumatic  
Torque Wrench Pumps . . . . . 212-213  
ZA4T-Series, Air Driven  
Torque Wrench Pumps . . . . . 214-217  
ATM-Series, Flange Alignment Tools . . . . . 218  
FSM/FSH-Series Hydraulic and  
Mechanical Industrial Spreaders . . . . . 219  
FS-Series, Hydraulic Flange Spreaders . . . . . 220  
NC-Series, Hydraulic Nut Splitters . . . . . 221  
NS-Series Hydraulic Nut Splitters . . . . . 222-223

## Integrated Solutions 224-240

Introduction . . . . . 224-225  
Synchronous Lifting . . . . . 226-229  
Heavy Lifting Strand Jacks . . . . . 230-233  
Stage Lifting . . . . . 234-235  
Synchronous Hoisting . . . . . 236-237  
Uni-Lift® Mechanical Actuators . . . . . 238-240

## Yellow Pages (Information Section) 241-254

Warranty Statement,  
Introduction and Standards . . . . . 241  
Safety Instructions . . . . . 242-243  
Cylinder-Pump Matching  
and Selection . . . . . 244  
Hydraulic Work Sheet . . . . . 245  
Basic Hydraulic System Set-ups . . . . . 246-247  
Basic Hydraulics . . . . . 248-249  
Conversion Tables . . . . . 250  
Cylinder Speed Charts . . . . . 251  
Valve Information . . . . . 252  
Bolting Guide . . . . . 253-254  
About Enerpac . . . . . 255  
Enerpac Worldwide Locations . . . . . 256  
Model Number Index . . . . . 257

All information in this catalog can be changed due to product improvements without prior notice.  
© Copyright 2009, Actuant Corp. All rights reserved. Any copying or other use of material in this catalog (text, illustrations, drawings, photos) without express written consent is prohibited.  
*Cover bridge photo courtesy of Kiewit.*

Page(s)	Page(s)	Page(s)	Page(s)
<b>A</b>	<b>E</b>	<b>MZ</b>	<b>SOH</b>
A ..... 120-122, .. 142-143, 146, 179	E ..... 188-189	MZ ..... 169	SP ..... 170-173
A5-A10 ..... 168	EBJ ..... 53	<b>N</b>	SPD ..... 170-171
A12 ..... 10	EGM ..... 108	NC ..... 221	SPK ..... 170
A13-A28 ..... 168	ELP ..... 176-177	NCB ..... 221	STB ..... 182-183
A29-A53 ..... 10	EMB ..... 176	NS ..... 222-223	STC ..... 180
A64-A66 ..... 122	EP ..... 156-159	NV ..... 130	STF ..... 220
A92 ..... 168, 179	EPH ..... 160-163	<b>P</b>	STN ..... 221
A102 ..... 10, 33	EPP ..... 156-159	P ... 56-57, 62-68	STP ..... 170-171
A128-A192 168, 169	EPT ..... 160	P/11 ..... 70-71	SW ..... 219
A185 ..... 168	EPX ..... 159	P392AL ..... 63	<b>T</b>
A200R ..... 146	ER ..... 176-177	P392FP ..... 68	T ..... 128
A205-A220 ... 142	ES ..... 176-177	PA ..... 100	THQ ..... 204
A218 ..... 168	ESS ..... 228-229	PAM ..... 101	TM ..... 148
A242-A305 ... 168	<b>F</b>	PAMG ..... 98-99	TSP ..... 193, 203
A252 ..... 10, 33	F ..... 120-121	PATG ..... 98-99	TT ..... 230-233
A258 ..... 142	FH ..... 120-121	PARG ..... 98-99	TW ..... 218
A310, A330 ... 142	FR ..... 120-121	PC ..... 62	<b>V</b>
A530-A595 ... 168	FS ..... 220	PE .. 76-79, 94-95	V ... 56-57, 130, ..... 132-133
A604 ..... 120-121	FSB ..... 219	PEM ..... 94-95	VA2 ..... 101
A607 ..... 168	FSH ..... 219	PER ..... 94-95	VC ..... 112-113
A630 ..... 120-121	FSM ..... 219	PGM ..... 105	VE ..... 110-115
A650 ..... 168	FZ ..... 123	PK ..... 146	VM ..... 110-113
AD ..... 146	<b>G</b>	PMB ..... 146	<b>W</b>
AH ..... 120-121	G ..... 126-127	PMU ..... 205	W ..... 196-203
AM ..... 122	GA ..... 130	PR ..... 54-55	WCB ... 180-181
AR ..... 120-121	GF ..... 124-125	PT ..... 186-187	WHC ..... 180
ATM ..... 218	GP ..... 124-125	PTA ..... 212, 213	WHR ..... 180
ATP ..... 104	<b>H</b>	PTJ ..... 184-185	WMC ..... 181
AW ..... 10	H ... 119, 126-127	PU ..... 74-75	WR ..... 168, 179
<b>B</b>	HA ..... 119	<b>R</b>	<b>X</b>
B ..... 238-239	HB ..... 119	RAC ..... 12-13	XA ..... 96-97
BHP ..... 152-155	HC ..... 119	RACH ..... 16-17	<b>Z</b>
BLS ..... 234-235	HF ..... 122	RACL ..... 14-15	Z ..... 121
BP ..... 72-73	HP ..... 27, 29	RAR ..... 18-19	ZA ..... 102-103
BRC ..... 24-25	<b>I</b>	RB ..... 10	ZA4T 204, 214-217
BRP ..... 24-25	IP .. 136-139, 143, ..... 146-147	RC .. 6-10, 56-57	ZC . 86, 92-93, 113
BSH ..... 194	IPL ..... 146	RCH ..... 26-27	ZE ..... 81, 88-93,
BV ..... 144-145	IPR . 140-141, 147	RCS ..... 22-23	ZET . 204, 210-211
BZ ..... 183	<b>J</b>	RD ..... 30-31	ZG ..... 106-107
<b>C</b>	JBI ..... 10	REB ..... 10	ZH ... 87, 93, 209
C ..... 120-121	JH ..... 52	REP ..... 10	ZL ..... 86, 92
CAT 10, 23, 33, 47	JHA ..... 52	RFL ..... 97-98	ZP .. 86-87, 92-93
CATG ..... 13, 15	<b>L</b>	RR ..... 32-35	ZU ..... 81-87
..... 19, 39, 43	LB ..... 48-49	RRH ..... 28-29	ZU4T 204, 206-209
CD ..... 121	LH ..... 148	RSM ..... 22-23	ZR 86, 92, 209, 217
CH ..... 120-121	LPC ..... 50-51	RWH ... 152-153	ZTM ... 209, 217
CLL ..... 44-47	LW ..... 174	<b>S</b>	11 ..... 70-71
CLP ..... 20-21	LX ..... 122	S ..... 190-193	41- ..... 71
CLRG ..... 40-43	<b>M</b>	SB ... 87, 92, 209, ..... 217, 219	43- ..... 71, 128
CLSG ..... 36-39	M ..... 238-239	SC ..... 59	45- ..... 71
CM ..... 178	MP ..... 69	SCH ..... 58-59	5DA1 ... 184-185
CR ..... 120-121	MS ..... 166-169	SCL ..... 58-59	6DA1 ... 184-185
CT ..... 121	MSP ... 170-171	SCP ..... 58-59	72- ..... 70, 71
CW ..... 154	<b>D</b>	SCR ..... 58-59	83- ..... 71
<b>D</b>	DA ..... 184-185	SDA ..... 192-193	
DGR ..... 129	DGR ..... 129	SHS ... 236-237	
		SLCG8 .. 226-227	



**Cylinders, Lifting Products and Systems**  
Page 4-59



**Pumps & Directional Control Valves**  
Page 60-115



**System Components & Control Valves**  
Page 116-133



**Presses**  
Page 134-149



**Pullers**  
Page 150-163



**Tools**  
Page 164-185



**Bolting Tools**  
Page 186-223



**Integrated Solutions**  
Page 224-240

**A** complete range of quality high force tools for all industrial applications, with local availability and after sale service anywhere in the world.... this is what has made Enerpac the undisputed global market leader in high pressure hydraulics.

Across every continent, Enerpac's network of authorized distributors and service centers can reach even the most remote locations, supplying and servicing products that are designed to enhance productivity and performance, while making the workplace safer.

With over 150 sales specialists and a network of service and engineering support in 17 countries across the globe, Enerpac has become the product of choice in industries such as manufacturing, construction, energy, oil & gas, shipbuilding, railroads, mining, and metals transformation.

Always at the leading edge of technology, Enerpac has continued to develop its range of time and cost-savings tools, utilizing modern engineered materials to improve productivity and minimize operator fatigue.

Enerpac's commitment to the continued development of quality high force tools ensures that the products you purchase are the best tools in the industry. We will continue to lead the way in the development of quality high force tools for all industrial applications.



# Class Brand

## 10 Reasons to Work with Enerpac

- Expert Design
- Highly Reliable
- Service Excellence
- Worldwide Experience
- Application Support
- Availability
- Quality
- Value
- Innovative Products
- Systems Solutions



### Total Quality

Our products are tested to the most exacting standards. These high standards guarantee the quality, price and performance requirements of the markets we serve around the globe.

### Global Network

Enerpac has an extensive network of authorized distributors and service centers located in more than 90 countries worldwide. You can rely on Enerpac for the products and technical support you need to get your job done, anywhere in the world.

### Logistics Excellence

Enerpac's mission is to maintain service excellence in the ever-changing world of modern distribution. Providing our extensive range of products to our thousands of distributors worldwide demands a logistic expertise only a market leader can provide.



### A Tradition of Innovation

Enerpac has a long history of finding new solutions to better meet the challenges of the industries we serve. We were the first to develop a composite hand pump and the first to offer a computerized lifting system. Our latest innovations include a full range of aluminum cylinders... cylinders with the strength of steel and the advantages of aluminum and the Z-Class series of power pumps... pumps that were designed to run cooler, use less electricity and are easy to service.

**ENERPAC**   
POWERFUL SOLUTIONS. GLOBAL FORCE.

**E**NERPAC hydraulic cylinders are available in hundreds of different configurations. Whatever the industrial application... lifting, pushing, pulling, bending, holding... whatever the force capacity, stroke length, or size restrictions... single- or double-acting, solid or hollow plunger, you can be sure that Enerpac has the cylinder to suit your high force application. Enerpac jacking cylinders fully comply to ASME B30.1 (except RD-Series).



### Golden Ring Design

The exclusive Golden Ring Design is a unique bearing design which absorbs eccentric load stresses to protect your cylinder against abrasion, over-extending or plunger blow-outs and jamming or top-end mushrooming. As a result, Golden Ring cylinders provide long, trouble-free operation.

### Hardened Saddle

prevents plunger from mushrooming and jamming in the top bearing. Snap-in design.

### Plunger Wiper

reduces contamination, extending cylinder life.

### Stop Ring

absorbs eccentric loading and prevents plunger over-extension

### Plated Plunger

resists wear and rust.

### Golden Ring

absorbs eccentric loading without galling cylinder parts.

### Plunger Return Spring




























enables fast plunger retraction on single-acting cylinders.



Note: The cut-away drawing is representative of typical cylinder construction and may not represent all cylinders in this section.



# Cylinder & Lifting Section Overview

* Capacity (tons)	Stroke Range (in)	Cylinder Type and Functions	Series	Page
5-100	.63-14.25	General Purpose Cylinders, Single-acting Cylinder Accessories 	RC	 6 ▶ 10 ▶
20-150	1.97-7.87	Aluminum Cylinders Single-Acting Solid, Lock Nut and Hollow 	RAC RACL RACH	 12 ▶ 14 ▶ 16 ▶
50-150	1.97-7.87	Aluminum Cylinders Double-Acting Solid 	RAR	 18 ▶
5-500	.25-2.44	Pancake and Low Height Cylinders, Single-Acting 	CLP RSM RCS	 20 ▶ 22 ▶ 23 ▶
2.5-60	5.00-6.00	Pull Cylinders, Single-Acting 	BRC BRP	 24 ▶
12-150	.31-10.13	Hollow Plunger Cylinders Single- and Double-Acting 	RCH RRH	 26 ▶ 28 ▶
4-25	1.13-10.25	Precision Production Cylinders, Double-Acting 	RD	 30 ▶
10-500	2.25-48.00	Long Stroke Cylinders, Double-Acting 	RR	 32 ▶
50-1000	1.97-11.81	High Tonnage Cylinders Single-Acting (S/A), S/A with Mechanical Locknut, Double-Acting 	CLSG CLRG CLL	 36 ▶ 40 ▶ 44 ▶
3-74	-	Lifting Bags	LB	 48 ▶
30-100	-	Plastic Cribbing Blocks	LPC	 50 ▶
1.5-150	3.00-20.00	Aluminum and Steel Jacks Industrial Bottle Jacks 	JHA/JH EBJ	 52 ▶ 53 ▶
60-200	14.0-27.0	POW'R RISER® Lifting Jack	PR	 54 ▶
10-25	2.0-6.0	Extreme Environment Products (Valves, cylinders, hand pumps) 	RC P V	 56 ▶
5-100	1.50-14.25	Cylinder - Pump Sets (Single-Acting) 	SC	 58 ▶

\* All cylinder capacities are nominal values, unless otherwise stated. [Maximum] capacities are theoretical and may vary, depending on cylinder condition and application.

▼ Shown from left to right: RC-506, RC-50, RC-2510, RC-154, RC-10010, RC-55, RC-1010



- The Golden Ring absorbs eccentric loading without galling cylinder parts
- Collar threads, plunger threads and base mounting holes enable easy fixturing (on most models)
- Designed for use in all positions
- High strength alloy steel for durability
- Nickel plating available on most models (contact Enerpac for details)
- Heavy-duty return springs
- Baked enamel finish for increased corrosion resistance
- CR-400 coupler and dust cap included on all models
- Plunger wiper reduces contamination, extending cylinder life

▼ Stage lifting set up in Greece, where assembled pipes, 82 feet in length, were stage lifted with six RC-2514 cylinders.



## The Industry Standard General Purpose Cylinder



### Saddles

All RC cylinders are equipped with hardened removable grooved saddles. For tilt and flat saddles, see the RC-Series accessory page.

Page: 10



### Base Plates

To ensure the stability of cylinders for lifting applications, base plates are available for 10, 25 and 50 ton RC cylinders.

Page: 10



### Specialty Attachments

For solving all kinds of application problems, specialty attachments are available for 5, 10 and 25 ton RC cylinders.

Page: 168

▼ RC cylinder mounting attachments greatly extend the application possibilities (available for 5, 10, 15 and 25 ton cylinders).





# Single-Acting, General Purpose Cylinders



## Golden Ring Design

The exclusive Golden Ring Design is a unique bearing design which absorbs eccentric load stresses to protect your cylinder against abrasion, over-extending or plunger blow-outs and jamming or top-end mushrooming. As a result, Golden Ring cylinders provide long, trouble-free operation.

### ▼ QUICK SELECTION CHART

For complete technical information see next page.

Cylinder Capacity	Stroke	Model Number	Cylinder Effective Area	Oil Capacity	Collapsed Height	Weight
tons (maximum)	(in)		(in <sup>2</sup> )	(in <sup>3</sup> )	(in)	(lbs)
<b>5</b> (4.9)	.63	<b>RC-50**</b>	.99	.62	1.63	2.2
	1.00	<b>RC-51</b>	.99	.99	4.34	2.3
	3.00	<b>RC-53</b>	.99	2.98	6.50	3.3
	5.00	<b>RC-55*</b>	.99	4.97	8.50	4.1
	7.00	<b>RC-57</b>	.99	6.96	10.75	5.3
	9.13	<b>RC-59</b>	.99	9.07	12.75	6.1
<b>10</b> (11.2)	1.00	<b>RC-101</b>	2.24	2.24	3.53	4.0
	2.13	<b>RC-102*</b>	2.24	4.75	4.78	5.1
	4.13	<b>RC-104</b>	2.24	9.23	6.75	7.2
	6.13	<b>RC-106*</b>	2.24	13.70	9.75	9.8
	8.00	<b>RC-108</b>	2.24	17.89	11.75	12.0
	10.13	<b>RC-1010*</b>	2.24	22.65	13.75	14.0
	12.00	<b>RC-1012</b>	2.24	26.84	15.75	15.0
	14.00	<b>RC-1014</b>	2.24	31.31	17.75	18.0
<b>15</b> (15.7)	1.00	<b>RC-151</b>	3.14	3.14	4.88	7.2
	2.00	<b>RC-152</b>	3.14	6.28	5.88	9.0
	4.00	<b>RC-154*</b>	3.14	12.57	7.88	11.0
	6.00	<b>RC-156*</b>	3.14	18.85	10.69	15.0
	8.00	<b>RC-158</b>	3.14	25.13	12.69	18.0
	10.00	<b>RC-1510</b>	3.14	31.42	14.69	21.0
	12.00	<b>RC-1512</b>	3.14	37.70	16.69	24.0
	14.00	<b>RC-1514</b>	3.14	43.98	18.69	26.0
<b>25</b> (25.8)	1.00	<b>RC-251</b>	5.16	5.16	5.50	13.0
	2.00	<b>RC-252*</b>	5.16	10.31	6.50	14.0
	4.00	<b>RC-254*</b>	5.16	20.63	8.50	18.0
	6.25	<b>RC-256*</b>	5.16	32.23	10.75	22.0
	8.25	<b>RC-258</b>	5.16	42.55	12.75	27.0
	10.25	<b>RC-2510</b>	5.16	52.86	14.75	31.0
	12.25	<b>RC-2512</b>	5.16	63.18	16.75	36.0
	14.25	<b>RC-2514*</b>	5.16	73.49	18.75	39.0
<b>30</b> (32.4)	8.25	<b>RC-308</b>	6.49	53.56	15.25	40.0
<b>50</b> (55.2)	2.00	<b>RC-502</b>	11.04	22.09	6.94	33.0
	4.00	<b>RC-504</b>	11.04	44.18	8.94	42.0
	6.25	<b>RC-506*</b>	11.04	69.03	11.13	51.0
	13.25	<b>RC-5013</b>	11.04	146.34	18.13	83.0
<b>75</b> (79.5)	6.13	<b>RC-756</b>	15.90	97.41	11.25	65.0
	13.13	<b>RC-7513</b>	15.90	208.74	19.38	130.0
<b>100</b> (103.1)	6.63	<b>RC-1006</b>	20.63	136.67	14.06	130.0
	10.25	<b>RC-10010</b>	20.63	211.45	17.69	160.0

\* Available as a set. See note on this page.

\*\* RC-50 cylinder has non-removable grooved saddle and no collar thread.

## RC Series



Capacity:

**5-100 tons**

Stroke:

**.63-14.25 inches**

Maximum Operating Pressure:

**10,000 psi**



### Think Safety

Manufacturer's rating of load and stroke are maximum safe limits.

Good practice encourages using only 80% of these ratings!

Page: 240



### RAC-Series, Single-Acting Cylinders

The lightweight general purpose spring return aluminum cylinders.

Page: 12




### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to

the System Components section for a full range of gauges.

Page: 117



### Pump and Cylinder Sets

All cylinders marked with an \* are available as sets (cylinder, gauge, couplers, hose and pump) for your ordering convenience.

Page: 58



# RC-Series, Single-Acting Cylinders



### Speed Chart





See the Enerpac Cylinder Speed Chart in our "Yellow Pages" to determine your approximate cylinder speed.

Page: 251

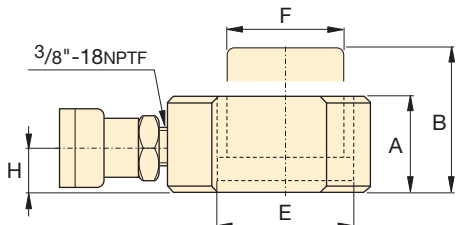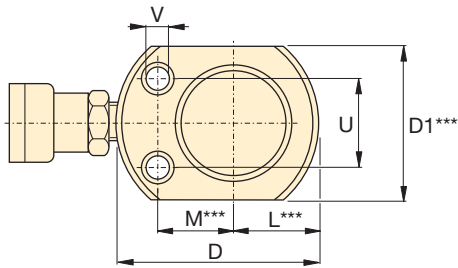


**RC-50**

**RC-101 only**  
(U1 = .75 inch)

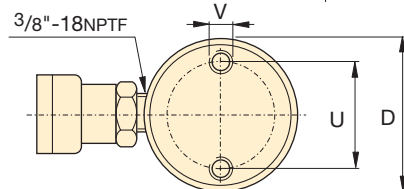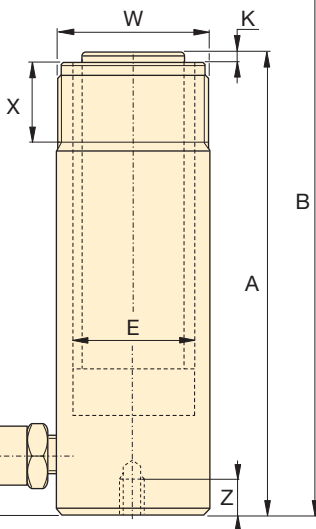

**RC-51 to RC-5013 models**



**RC-1006 and RC-10010 models**

◀ For full features see page 6.


Cylinder Capacity	Stroke	Model Number	Cylinder Effective Area	Oil Capacity	Collapsed Height	Extended Height	Outside Diameter
tons (maximum)	(in)		(in <sup>2</sup> )	(in <sup>3</sup> )	A (in)	B (in)	D (in)
<b>5</b> (4.9)	.63	<b>RC-50**</b>	.99	.62	1.63	2.25	2.31
	1.00	<b>RC-51</b>	.99	.99	4.34	5.34	1.50
	3.00	<b>RC-53</b>	.99	2.98	6.50	9.50	1.50
	5.00	<b>RC-55*</b>	.99	4.97	8.50	13.50	1.50
	7.00	<b>RC-57</b>	.99	6.96	10.75	17.75	1.50
	9.13	<b>RC-59</b>	.99	9.07	12.75	21.88	1.50
<b>10</b> (11.2)	1.00	<b>RC-101</b>	2.24	2.24	3.53	4.53	2.25
	2.13	<b>RC-102*</b>	2.24	4.75	4.78	6.91	2.25
	4.13	<b>RC-104</b>	2.24	9.23	6.75	10.88	2.25
	6.13	<b>RC-106*</b>	2.24	13.70	9.75	15.88	2.25
	8.00	<b>RC-108</b>	2.24	17.89	11.75	19.75	2.25
	10.13	<b>RC-1010*</b>	2.24	22.65	13.75	23.88	2.25
	12.00	<b>RC-1012</b>	2.24	26.84	15.75	27.75	2.25
	14.00	<b>RC-1014</b>	2.24	31.31	17.75	31.75	2.25
<b>15</b> (15.7)	1.00	<b>RC-151</b>	3.14	3.14	4.88	5.88	2.75
	2.00	<b>RC-152</b>	3.14	6.28	5.88	7.88	2.75
	4.00	<b>RC-154*</b>	3.14	12.57	7.88	11.88	2.75
	6.00	<b>RC-156*</b>	3.14	18.85	10.69	16.69	2.75
	8.00	<b>RC-158</b>	3.14	25.13	12.69	20.69	2.75
	10.00	<b>RC-1510</b>	3.14	31.42	14.69	24.69	2.75
	12.00	<b>RC-1512</b>	3.14	37.70	16.69	28.69	2.75
	14.00	<b>RC-1514</b>	3.14	43.98	18.69	32.69	2.75
<b>25</b> (25.8)	1.00	<b>RC-251</b>	5.16	5.16	5.50	6.50	3.38
	2.00	<b>RC-252*</b>	5.16	10.31	6.50	8.50	3.38
	4.00	<b>RC-254*</b>	5.16	20.63	8.50	12.50	3.38
	6.25	<b>RC-256*</b>	5.16	32.23	10.75	17.00	3.38
	8.25	<b>RC-258</b>	5.16	42.55	12.75	21.00	3.38
	10.25	<b>RC-2510</b>	5.16	52.86	14.75	25.00	3.38
	12.25	<b>RC-2512</b>	5.16	63.18	16.75	29.00	3.38
	14.25	<b>RC-2514*</b>	5.16	73.49	18.75	33.00	3.38
<b>30</b> (32.4)	8.25	<b>RC-308</b>	6.49	53.56	15.25	23.50	4.00
<b>50</b> (55.2)	2.00	<b>RC-502</b>	11.04	22.09	6.94	8.94	5.00
	4.00	<b>RC-504</b>	11.04	44.18	8.94	12.94	5.00
	6.25	<b>RC-506*</b>	11.04	69.03	11.13	17.38	5.00
	13.25	<b>RC-5013</b>	11.04	146.34	18.13	31.38	5.00
<b>75</b> (79.5)	6.13	<b>RC-756</b>	15.90	97.41	11.25	17.38	5.75
	13.13	<b>RC-7513</b>	15.90	208.74	19.38	32.50	5.75
<b>100</b> (103.1)	6.63	<b>RC-1006</b>	20.63	136.67	14.06	20.69	7.00
	10.25	<b>RC-10010</b>	20.63	211.45	17.69	27.94	7.00

\* Available as a set. See page 58.

\*\* RC-50 cylinder has non-removable grooved saddle and no collar thread.

\*\*\* D1 = 1.63 inch, L = .81 inch, M = 1.00 inch.

# Single-Acting, General Purpose Cylinders



**Couplers Included!**  
CR-400 couplers included on all models. Fits all HC-Series hoses.

Capacity:  
**5-100 tons**

Stroke:  
**.63-14.25 inches**






Maximum Operating Pressure:  
**10,000 psi**

**RC Series**






Cylinder Bore Diam.	Plunger Diam.	Base to Adv. Port	Saddle Diam.	Saddle Protusion from Plngr.	Plunger Internal Thread	Plunger Thread Length	Base Mounting Holes			Collar Thread	Collar Thread Length	Weight (lbs)	Model Number
							Bolt Circle U (in)	Thread V (in)	Thrd. Depth Z (in)				
E (in)	F (in)	H (in)	J (in)	K (in)	O (in)	P (in)	U (in)	V (in)	Z (in)	W (in)	X (in)		
1.13	1.00	.75	**	**	**	**	1.13	.22	—	—	—	2.2	RC-50**
1.13	1.00	.75	1.00	.25	3/4"-16	.56	1.00	1/4"-20UN	.56	1 1/2"-16	1.13	2.3	RC-51
1.13	1.00	.75	1.00	.25	3/4"-16	.56	1.00	1/4"-20UN	.56	1 1/2"-16	1.13	3.3	RC-53
1.13	1.00	.75	1.00	.25	3/4"-16	.56	1.00	1/4"-20UN	.56	1 1/2"-16	1.13	4.1	RC-55*
1.13	1.00	.75	1.00	.25	3/4"-16	.63	1.00	1/4"-20UN	.56	1 1/2"-16	1.13	5.3	RC-57
1.13	1.00	.75	1.00	.25	3/4"-16	.63	1.00	1/4"-20UN	.56	1 1/2"-16	1.13	6.1	RC-59
1.69	1.50	.75	—	—	#10-24UN	.25	1.56	5/16"-18UN	.50	2 1/4"-14	1.06	4.0	RC-101
1.69	1.50	.75	1.38	.25	1"-8	.75	1.56	5/16"-18UN	.50	2 1/4"-14	1.13	5.1	RC-102*
1.69	1.50	.75	1.38	.25	1"-8	.75	1.56	5/16"-18UN	.50	2 1/4"-14	1.06	7.2	RC-104
1.69	1.50	.75	1.38	.25	1"-8	.75	1.56	5/16"-18UN	.50	2 1/4"-14	1.13	9.8	RC-106*
1.69	1.50	.75	1.38	.25	1"-8	.75	1.56	5/16"-18UN	.50	2 1/4"-14	1.06	12	RC-108
1.69	1.50	.75	1.38	.25	1"-8	.75	1.56	5/16"-18UN	.50	2 1/4"-14	1.13	14	RC-1010*
1.69	1.50	.75	1.38	.25	1"-8	.75	1.56	5/16"-18UN	.50	2 1/4"-14	1.06	15	RC-1012
1.69	1.50	.75	1.38	.25	1"-8	.75	1.56	5/16"-18UN	.50	2 1/4"-14	1.06	18	RC-1014
2.00	1.63	.75	1.50	.38	1"-8	1.00	1.88	3/8"-16UN	.50	2 3/4"-16	1.19	7.2	RC-151
2.00	1.63	.75	1.50	.38	1"-8	1.00	1.88	3/8"-16UN	.50	2 3/4"-16	1.19	9	RC-152
2.00	1.63	.75	1.50	.38	1"-8	1.00	1.88	3/8"-16UN	.50	2 3/4"-16	1.19	11	RC-154*
2.00	1.63	1.00	1.50	.38	1"-8	1.00	1.88	3/8"-16UN	.50	2 3/4"-16	1.19	15	RC-156*
2.00	1.63	1.00	1.50	.38	1"-8	1.00	1.88	3/8"-16UN	.50	2 3/4"-16	1.19	18	RC-158
2.00	1.63	1.00	1.50	.38	1"-8	1.00	1.88	3/8"-16UN	.50	2 3/4"-16	1.19	21	RC-1510
2.00	1.63	1.00	1.50	.38	1"-8	1.00	1.88	3/8"-16UN	.50	2 3/4"-16	1.19	24	RC-1512
2.00	1.63	1.00	1.50	.38	1"-8	1.00	1.88	3/8"-16UN	.50	2 3/4"-16	1.19	26	RC-1514
2.56	2.25	1.00	2.00	.41	1 1/2"-16	1.00	2.31	1/2"-13UN	.75	3 5/16"-12	1.94	13	RC-251
2.56	2.25	1.00	2.00	.41	1 1/2"-16	1.00	2.31	1/2"-13UN	.75	3 5/16"-12	1.94	14	RC-252*
2.56	2.25	1.00	2.00	.41	1 1/2"-16	1.00	2.31	1/2"-13UN	.75	3 5/16"-12	1.94	18	RC-254*
2.56	2.25	1.00	2.00	.41	1 1/2"-16	1.00	2.31	1/2"-13UN	.75	3 5/16"-12	1.94	22	RC-256*
2.56	2.25	1.00	2.00	.41	1 1/2"-16	1.00	2.31	1/2"-13UN	.75	3 5/16"-12	1.94	27	RC-258
2.56	2.25	1.00	2.00	.41	1 1/2"-16	1.00	2.31	1/2"-13UN	.75	3 5/16"-12	1.94	31	RC-2510
2.56	2.25	1.00	2.00	.41	1 1/2"-16	1.00	2.31	1/2"-13UN	.75	3 5/16"-12	1.94	36	RC-2512
2.56	2.25	1.00	2.00	.41	1 1/2"-16	1.00	2.31	1/2"-13UN	.75	3 5/16"-12	1.94	39	RC-2514*
2.88	2.25	2.25	2.00	.41	1 1/2"-16	1.00	—	—	—	3 5/16"-12	1.94	40	RC-308
3.75	3.13	1.31	2.81	.11	—	—	3.75	1/2"-13UN	.75	5"-12	2.19	33	RC-502
3.75	3.13	1.31	2.81	.11	—	—	3.75	1/2"-13UN	.75	5"-12	2.19	42	RC-504
3.75	3.13	1.38	2.81	.11	—	—	3.75	1/2"-13UN	.75	5"-12	2.19	51	RC-506*
3.75	3.13	1.38	2.81	.11	—	—	3.75	1/2"-13UN	.75	5"-12	2.19	83	RC-5013
4.50	3.75	1.19	2.81	.23	—	—	—	—	—	5 3/4"-12	1.75	65	RC-756
4.50	3.75	1.19	2.81	.23	—	—	—	—	—	5 3/4"-12	1.75	130	RC-7513
5.13	4.13	1.63	2.81	.11	—	—	5.50	3/4"-10UN	1.00	6 7/8"-12	1.75	130	RC-1006
5.13	4.13	1.63	2.81	.11	—	—	5.50	3/4"-10UN	1.00	6 7/8"-12	1.75	160	RC-10010




## ▼ SELECTION CHART





For Use with Cylinder Capacity (tons)	Saddles			Base Plate	Mounting Block	Clevis Eyes	
	Flat/Threaded	Grooved <sup>1)</sup>	Tilt			Base <sup>4)</sup>	Plunger
							
5	A-53F <sup>2)</sup>	A-53G <sup>2)</sup>	-	-	RB-5 <sup>2)</sup> , AW-51 <sup>2)</sup> , AW-53 <sup>2)</sup>	REB-5 <sup>2)</sup>	REP-5 <sup>2)</sup>
10	A-12 <sup>3)</sup> , A-102F <sup>3)</sup>	A-102G <sup>3)</sup>	CAT-10 <sup>3)</sup>	JB-10	RB-10, AW-102	REB-10	REP-10 <sup>3)</sup>
15	-	A-152G	CAT-10	-	RB-15	REB-15	REP-10
25	A-29	A-252G	CAT-50	JB-25	RB-25	REB-25	REP-25
30	A-29	A-252G	CAT-50	-	RB-25	-	REP-25
50	-	-	CAT-100	JB-50	-	-	-
75	-	-	CAT-100	-	-	-	-
100	-	-	CAT-100	-	-	-	-













<sup>1)</sup> Standard on 5-30 ton RC-cylinders   <sup>2)</sup> Except RC-50   <sup>3)</sup> Except RC-101   <sup>4)</sup> Mounting screws are included.


## ▼ DIMENSION CHARTS

Model Number	Saddle Dimensions (in)			
	A	B	C	
<b>Flat</b>				
A-53F	1.00	.25	.68	
A-102F	1.38	.24	.88	
A-12	2.00	1.88	1" - 8UNC	
A-29	2.00	1.88	1 1/2" - 16UN	
<b>Grooved</b>				
A-53G	1.00	.25	.68	
A-102G	1.38	.24	.88	
A-152G	1.50	.37	.88	
A-252G	1.97	.37	1.40	

Model Number	Tilt Saddle Dimensions (in)			
	A	B	C	
<b>Tilt</b>				
CAT-10	1.38	.79	.88	
CAT-50	1.97	.83	1.40	
<b>Tilt</b>				
CAT-100	2.80	.98	-	

Model Number	Base Plate Dimensions (in)						
	A	B	C	D	E		
JB-10	9.00	9.00	5.34	2.29	.81		
JB-25	11.00	11.00	5.53	3.41	1.03		
JB-50	12.00	.60	3.75	5.19	1.25		

Model Number	Mounting Block Dimensions (in)											
	A	B	C	D	E	F	G	H				
RB-5	1 1/2" - 16	3.50	3.00	-	1.00	-	-	-				
AW-51	1 1/2" - 16	2.76	2.36	.43	.98	2.13	1/4" - 20	1.62				
AW-53	1 1/2" - 16	2.87	.28	.31	.75	2.25	1/4" - 20	.41				
RB-10	2 1/4" - 14	4.50	3.50	-	1.00	-	-	-				
AW-102	2 1/4" - 14	3.94	3.25	.63	1.18	3.00	7/16" - 20	2.31				
RB-15	2 3/4" - 16	4.00	4.50	-	1.50	-	-	-				
RB-25	3 5/16" - 12	5.00	6.50	-	2.00	-	-	-				

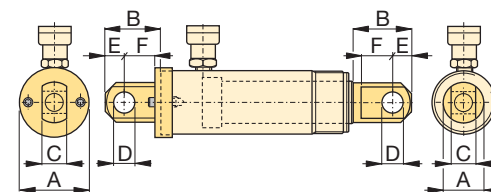Type	Model Number	Clevis Eye Dimensions (in)						Pin to Pin* (in)	
		A	B	C	D	E	F		
Base <sup>4)</sup>	REB-5	1.75	1.88	.56	.63	.63	1.00	2.37	
	REB-10	2.50	2.63	1.00	.88	1.00	1.38	3.07	
	REB-15	3.00	2.63	1.00	.88	1.00	1.38	3.07	
	REB-25	3.75	3.13	1.50	1.25	1.25	1.63	3.45	
Plunger	REP-5	1.13	1.62	.56	.63	.63	.75	-	
	REP-10	1.69	2.43	1.00	.88	1.00	1.13	-	
	REP-25	2.25	2.93	1.50	1.25	1.25	1.38	-	

\* Pin to Pin- REB and REP Clevises fitted. Add cylinder stroke length.  
<sup>4)</sup> Mounting screws are included.

# The Enerpac Lightweight Aluminum Cylinders

▼ Shown: RAC, RACL, RACH, and RAR



- Lightweight, easy to carry and position to allow a higher cylinder capacity-to-weight-ratio
- Non-corrosive by design, aluminum has always been a good material for use in many caustic environments
- Composite bearings on all moving surfaces guarantee NO metal-to-metal contact, to resist side loads and increase cylinder life



1. **Removable Hardened Saddle** protects plunger from being damaged by abrasive surface contact.
2. **Stop Ring** on all models absorbs eccentric loading and prevents plunger over-extension.
3. **Composite Bearing** material to prevent metal-to-metal contact, reducing side-load issues and increasing life.
4. **Hard-coated Plunger and Base** resist wear and prevent galling.
5. **7075-T6 Aluminum Alloy Components** for maximum strength and minimum weight.
6. **Plunger Return Spring** on all single-acting models for prompt cylinder return.
7. **Standard Steel Baseplate** protects cylinder base from abrasive surfaces.

## RA Series

Capacity:  
**20-150 tons**

Stroke:  
**1.97-7.87 inches**

Maximum Operating Pressure:  
**10,000 psi**



**Think Safety**  
Manufacturer's rating of load and stroke are maximum safe limits.

Good practice encourages using only 80% of these ratings!

Page: 242



### RAC-Series, Single-Acting Cylinders

The lightweight general purpose spring return aluminum cylinders.

Page: 12



### RACL-Series, Lock Nut Cylinders

The lightweight spring return aluminum cylinders for mechanical load holding.

Page: 14



### RACH-Series, Hollow Plunger Cylinders

For both push and pull forces with a single-acting cylinders.

Page: 16



### RAR-Series, Double-Acting Cylinders

The lightweight aluminum cylinders for lifting and lowering.

Page: 18

▼ Shown from left to right: RAC-508, RAC-1506, RAC-304, and RAC-206



- Composite bearings prevent metal-to-metal contact, increasing cylinder life and resistance to side-loads of up to 10%
- Hard coat finish on all surfaces resists damage and extends cylinder life
- Handles included on all models
- Steel baseplate and saddle for protection against load-induced damage
- Integral stop ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity
- High-strength return spring for rapid cylinder retraction
- CR-400 coupler and dustcap included on all models
- All cylinders meet ASME B-30.1 and ISO 10100 standards



◀ Enerpac lightweight aluminum RAC-506 cylinders are ideal for wet environments such as this tunnel under the river (Holland High-Speed Train Line).

## Lightweight for Maximum Portability



### Saddles

All RAC cylinders are equipped with bolt-on removable saddles of hardened steel.



### Lightweight Hand Pumps

Enerpac hand pumps **P-392** or **P-802** make the optimal lightweight set.

Page: 62



### Aluminum Lock Nut Cylinders

When positive mechanical load holding is required, the lightweight RACL-Series Aluminum Lock Nut cylinders are the ideal choice.

Page: 14

Cylinder Capacity (tons) [maximum]	Stroke (in)	Model Number	Cylinder Effective Area (in <sup>2</sup> )
20 [24.1]	1.97	RAC-202	4.83
	3.94	RAC-204	4.83
	5.91	RAC-206	4.83
30 [34.2]	1.97	RAC-302	6.85
	3.94	RAC-304	6.85
	5.91	RAC-306	6.85
50 [54.9]	1.97	RAC-502	10.99
	3.94	RAC-504	10.99
	5.91	RAC-506	10.99
100 [110.9]	3.94	RAC-1004	22.19
	5.91	RAC-1006	22.19
	7.87	RAC-1008	22.19
150 [175.9]	5.91	RAC-1506	35.18

# Single-Acting, Spring Return Cylinders




## Aluminum vs. Steel

Aluminum cylinders, while offering the most lightweight solution for many lifting, stressing and lowering applications, also have some unique limitations due to material properties.

Aluminum differs from steel in that it has a lower finite fatigue life. This means aluminum cylinders should NOT be used in high-cycle applications such as production.


The Enerpac line of aluminum cylinders are designed to provide 5,000 cycles at their recommended pressure. **This limit should not be exceeded.** In normal lifting and many maintenance applications, this should provide a lifetime of use.

Optional Bolt Tilt Saddle Dimensions (in)			
Cylinder Model / Capacity	Model Number	Saddle Diameter	Saddle Protrusion from Base K1
(ton)		J1	K1
RAC-50	CATG-50	1.97	1.02
RAC-100	CATG-100	3.59	1.30
RAC-150	CATG-150	4.65	1.46



Steel Base Plate Mounting Holes			
Cylinder Model / Capacity	Bolt Circle U	Thread V	Thread Depth <sup>1)</sup> Z
(ton)	(in)	(mm)	(in)
RAC-20	2.76	M6	.47
RAC-30	3.15	M6	.47
RAC-50	4.33	M6	.47
RAC-100	6.30	M6	.47
RAC-150	7.87	M6	.47

<sup>1)</sup> Including Base Plate Height of .25 inches.  
Four (4) baseplate bolts: M6

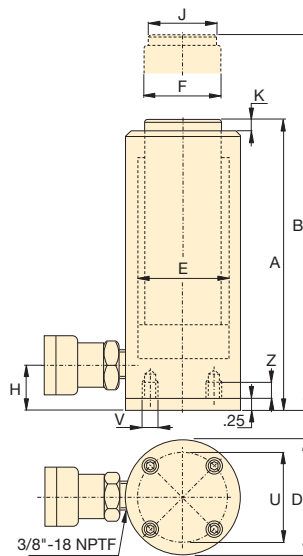

## RAC Series



Capacity:  
**20-150 tons**

Stroke:  
**1.97-7.87 inches**

Maximum Operating Pressure:  
**10,000 psi**



### Steel Base Plate

The steel base plate protects the cylinder base from damage, it should not be removed.

The base holes in these aluminum cylinders are designed for securing the steel base plate. **They will not withstand the capacity of the cylinder.**

Do not use the base holes in these aluminum cylinders to attach any device to the cylinder.

Oil Capacity	Collapsed Height	Extended Height	Outside Diameter	Cylinder Bore Diameter	Plunger Diameter	Base to Advance Port	Saddle Diameter	Saddle Protrusion from Plunger	Weight	Model Number
(in <sup>3</sup> )	A (in)	B (in)	D (in)	E (in)	F (in)	H (in)	J (in)	K (in)	(lbs)	
9.51	6.85	8.82	3.35	2.48	1.97	1.07	1.57	.12	7.9	RAC-202
19.02	8.82	12.76	3.35	2.48	1.97	1.07	1.57	.12	9.0	RAC-204
28.52	10.79	16.69	3.35	2.48	1.97	1.07	1.57	.12	10.1	RAC-206
13.48	7.13	9.09	3.94	2.95	2.36	1.31	1.57	.12	9.9	RAC-302
26.97	9.09	13.03	3.94	2.95	2.36	1.31	1.57	.12	11.5	RAC-304
40.45	11.06	16.97	3.94	2.95	2.36	1.31	1.57	.12	13.0	RAC-306
21.63	7.32	9.29	5.12	3.74	3.15	1.19	1.97	.12	18.7	RAC-502
43.27	9.29	13.23	5.12	3.74	3.15	1.19	1.97	.12	21.6	RAC-504
64.90	11.26	17.17	5.12	3.74	3.15	1.19	1.97	.12	24.5	RAC-506
87.36	10.67	14.61	7.09	5.31	4.33	1.82	3.70	.12	43.2	RAC-1004
131.04	12.64	18.54	7.09	5.31	4.33	1.82	3.70	.12	48.3	RAC-1006
174.72	14.61	22.48	7.09	5.31	4.33	1.82	3.70	.12	53.4	RAC-1008
207.76	13.49	19.40	9.06	6.69	5.51	2.02	4.45	.12	73.4	RAC-1506

▼ Shown from left to right: RACL-1006, RACL-504 and RACL-506



- Aluminum Lock Nut provides mechanical load holding for extended periods
- Hardened steel stop ring increases cylinder life and resistance to side-loads of up to 5%
- Hard coat finish on all surfaces resists damage and extends cylinder life
- Composite bearings increase cylinder life and side load resistance
- Handles included on all models
- Steel baseplate and saddle for protection against load-induced damage
- Integral stop ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity
- High-strength return spring for rapid cylinder retraction
- CR-400 coupler and dustcap included on all models
- All cylinders meet ASME B-30.1 and ISO 10100 standards



◀ The portable Lock Nut cylinder RACL-1506 used for extended load support during epoxy injection for bridge reinforcement.

## To Secure Loads Mechanically



### Saddles

All RACL cylinders are equipped with bolt-on removable saddles of hardened steel. For tilt saddles see next page.

Page: 115



### Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 118



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment.

Refer to the System Components section for a full range of gauges.

Page: 117

Cylinder Capacity	Stroke	Model Number	Cylinder Effective Area
ton (maximum)	(in)		(in <sup>2</sup> )
30 (34.2)	1.97	RACL-302	6.85
	3.94	RACL-304	6.85
	5.91	RACL-306	6.85
50 (54.9)	1.97	RACL-502	10.99
	3.94	RACL-504	10.99
	5.91	RACL-506	10.99
100 (110.9)	1.97	RACL-1002	22.19
	3.94	RACL-1004	22.19
	5.91	RACL-1006	22.19
150 (175.9)	1.97	RACL-1502	35.18
	3.94	RACL-1504	35.18
	5.91	RACL-1506	35.18



# Single-Acting, Spring Return, Lock Nut Cylinders



## Aluminum vs. Steel


Aluminum cylinders, while offering the most lightweight solution for many lifting, stressing and lowering applications, also have some unique limitations due to material properties.

Aluminum differs from steel in that it has a lower finite fatigue life. This means aluminum cylinders should NOT be used in high-cycle applications such as production.

The Enerpac line of aluminum cylinders are designed to provide 5,000 cycles at their recommended pressure. **This limit should not be exceeded.** In normal lifting and many maintenance applications, this should provide a lifetime of use.

### Optional Bolt On Tilt Saddle Dimensions (in)


Cylinder Model / Capacity (ton)	Model Number	Saddle Diameter	Saddle Protrusion from Base K1
RACL-50	CATG-50	1.97	1.02
RACL-100	CATG-100	3.59	1.30
RACL-150	CATG-150	4.65	1.46



### Steel Base Plate Mounting Holes

Cylinder Model / Capacity (ton)	Bolt Circle U (in)	Thread V (mm)	Thread Depth <sup>1)</sup> Z (in)
RACL-30	3.15	M6	.24
RACL-50	4.33	M6	.47
RACL-100	6.30	M6	.47
RACL-150	7.87	M6	.47

<sup>1)</sup> Including Base Plate Height of .25 inches. Four (4) baseplate bolts: M6

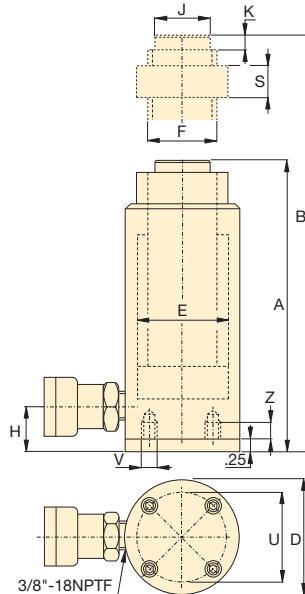

## RACL Series



Capacity:  
**30-150 tons**

Stroke:  
**1.97-5.91 inches**

Maximum Operating Pressure:  
**10,000 psi**



### Steel Base Plate

The steel base plate protects the cylinder base from damage, it should not be removed.

The base holes in these aluminum cylinders are designed for securing the steel base plate. **They will not withstand the capacity of the cylinder.**

Do not use the base holes in these aluminum cylinders to attach any device to the cylinder.



### Lifting an Unbalanced Load

When lifting an unbalanced load Enerpac Synchronous Lift Systems can be the

solution with multiple lift point capabilities from 4 to 64 points.

Page: **228**

Oil Capacity (in <sup>3</sup> )	Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter (Threaded) F (in)	Base to Advance Port H (in)	Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Lock Nut Height S (in)	Weight (lbs)	Model Number
13.48	9.10	11.07	3.94	2.95	2.36	1.31	1.58	.12	1.97	11.9	RACL-302
26.97	11.07	15.01	3.94	2.95	2.36	1.31	1.58	.12	1.97	13.4	RACL-304
40.45	13.04	18.95	3.94	2.95	2.36	1.31	1.58	.12	1.97	14.9	RACL-306
21.63	9.29	11.26	5.12	3.74	3.15	1.19	1.97	.12	1.97	20.5	RACL-502
43.27	11.26	15.20	5.12	3.74	3.15	1.19	1.97	.12	1.97	23.4	RACL-504
64.90	13.23	19.13	5.12	3.74	3.15	1.19	1.97	.12	1.97	26.2	RACL-506
43.68	11.65	13.62	7.09	5.31	4.33	1.82	3.70	.12	2.95	48.2	RACL-1002
87.36	13.62	17.56	7.09	5.31	4.33	1.82	3.70	.12	2.95	53.3	RACL-1004
131.14	15.59	21.50	7.09	5.31	4.33	1.82	3.70	.12	2.95	58.4	RACL-1006
69.25	12.72	14.69	9.06	6.69	5.51	2.02	4.45	.12	3.15	71.0	RACL-1502
138.61	14.69	18.62	9.06	6.69	5.51	2.02	4.45	.12	3.15	79.8	RACL-1504
207.91	16.65	22.56	9.06	6.69	5.51	2.02	4.45	.12	3.15	88.6	RACL-1506

▼ Shown from left to right: RACH-15010, RACH-304 and RACH-208



- Hollow plunger design allows for both pull and push forces
- Composite bearings increase cylinder life and side load resistance
- Hard coat finish on all surfaces resists damage and extends cylinder life
- Handles included on all models
- Floating center tube increases seal life
- Steel baseplate and saddle for protection against load-induced damage
- Integral stop ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity
- High-strength return spring for rapid cylinder retraction



◀ An RACH-306, powered by a P-392 hand pump, is used to extract corroded carriage pins from refuse collection vehicles.

## The Lightweight Solution for Tensioning and Testing



### Saddles

All RACH-cylinders are equipped with bolt-on removable hardened steel hollow saddles.



### Lightweight Hand Pumps

Enerpac hand pumps P-392 or P-802 make the optimal lightweight set.

Page: 62



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment.

Refer to the System Components section for a full range of gauges.

Page: 117



### Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 118

Cylinder Capacity	Stroke	Model Number	Cylinder Effective Area
ton [maximum]	(in)		(in <sup>2</sup> )
20 [25.3]	1.97	RACH-202	5.07
	5.91	RACH-206	5.07
30 [39.6]	1.97	RACH-302	7.92
	5.91	RACH-306	7.92
60 [65.6]	3.94	RACH-604	13.13
	5.91	RACH-606	13.13
100 [127.5]	5.91	RACH-1006	25.51

# Single-Acting, Spring Return, Hollow Plunger Cylinders




## Aluminum vs. Steel

Aluminum cylinders, while offering the most lightweight solution also have some unique limitations due to material properties. It differs from steel in that it has a lower finite fatigue life.

Aluminum cylinders should NOT be used in high-cycle applications such as production.

These cylinders are designed to provide 5000 cycles at their recommended pressure. **This limit should not be exceeded.** In normal lifting and many maintenance applications, this should provide a lifetime of use.

## RACH Series



Capacity:  
**20-100 tons**


Stroke:  
**1.97-5.91 inches**

Center Hole Diameter:  
**1.06-3.11 inches**

Maximum Operating Pressure:  
**10,000 psi**

Steel Base Plate Mounting Holes			
Cylinder Model / Capacity (ton)	Bolt Circle U (in)	Thread V (mm)	Thread Depth <sup>1)</sup> Z (in)
RACH-20	3.15	M6	.47
RACH-30	4.33	M6	.47
RACH-60	6.29	M6	.47
RACH-100	9.05	M6	.47

<sup>1)</sup> Including Base Plate Height of .25 inches. Four (4) baseplate bolts: M6

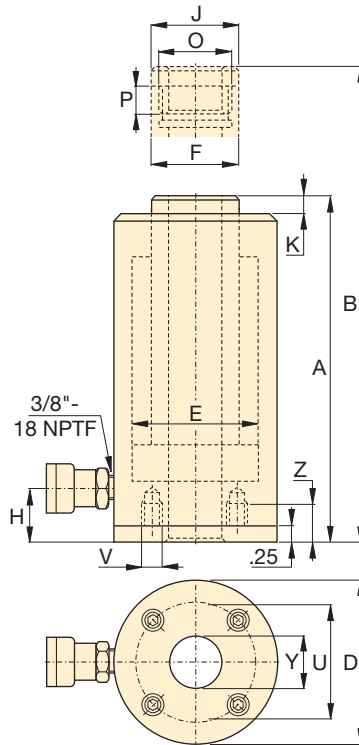

### Steel Base Plate

The steel base plate protects the cylinder base from damage, it should not be removed.

The base holes in these aluminum cylinders are designed for securing the steel base plate. **They will not withstand the capacity of the cylinder.**

Do not use the base holes in these aluminum cylinders to attach any device to the cylinder.



### Standard Features

- CR-400 coupler and dust cap
- All cylinders meet ASME B-30.1 and ISO 10100 standards.

Oil Capacity (in <sup>3</sup> )	Collapsed Height A (in)	Extended Height B (in)	Outside Diameter D (in)	Cylinder Bore Diameter E (in)	Plunger Diameter F (in)	Base to Advance Port H (in)	Saddle Diameter J (in)	Saddle Protrusion from Plunger K (in)	Center Hole Diameter Y (in)	Weight (lbs)	Model Number
9.98	7.41	9.37	3.94	2.95	2.17	1.14	2.17	.39	1.06	11.5	RACH-202
29.94	12.41	18.32	3.94	2.95	2.17	1.14	2.17	.39	1.06	15.7	RACH-206
15.59	8.20	10.17	5.12	3.74	2.76	1.14	2.76	.39	1.34	17.6	RACH-302
46.77	13.12	19.02	5.12	3.74	2.76	1.14	2.76	.39	1.34	24.7	RACH-306
51.69	12.41	16.34	7.09	5.12	3.94	2.41	3.94	.47	2.13	43.0	RACH-604
77.53	14.97	20.87	7.09	5.12	3.94	2.41	39.4	.47	2.13	50.3	RACH-606
150.64	15.39	21.31	9.84	7.28	5.71	2.41	5.71	.55	3.11	101.9	RACH-1006

▼ Shown from left to right: RAR-1008, RAR-506, RAR-502



## The Lightweight Solution for Double-Acting Applications

- Double-acting for rapid retraction, regardless of hose lengths and system losses
- Composite bearings increase cylinder life and side load resistance
- Hard coat finish on all surfaces resists damage and extends cylinder life
- Handles included on all models
- Steel baseplate and saddle for protection against load-induced damage
- Integral stop ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity
- Built-in safety valve prevents accidental over-pressurization



### Saddles

All RAR-cylinders are equipped with bolt-on removable hardened steel saddles. For tilt

saddles see next page.

Page: 19



### Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 118



### Optimum Performance

Enerpac's range of ZU4 electric pumps, fitted with manual or solenoid operated 4-way valves, offer optimum combinations with RAR cylinders.

Page: 80

▼ An RAR-506 was easy to position under a bulldozer for repair of frame member.



Cylinder Capacity (ton)	Stroke (in)	Model Number	Maximum Cylinder Capacity (ton)		Cylinder Effective Area (in <sup>2</sup> )		Oil Capacity (in <sup>3</sup> )	
			Push	Pull	Push	Pull	Push	Pull
50	1.97	RAR-502	55	21	10.99	4.14	21.63	8.15
	3.94	RAR-504	55	21	10.99	4.14	43.25	16.30
	5.91	RAR-506	55	21	10.99	4.14	64.88	24.44
100	3.94	RAR-1004	111	62	22.19	12.33	87.35	48.53
	5.91	RAR-1006	111	62	22.19	12.33	131.02	72.79
	7.87	RAR-1008	111	62	22.19	12.33	174.70	97.05
150	5.91	RAR-1506	176	102	35.18	20.45	207.77	120.78

# Double-Acting, Aluminum Cylinders




## Aluminum vs. Steel

Aluminum cylinders, while offering the most lightweight solution also have some unique limitations due to material properties.

It differs from steel in that it has a lower finite fatigue life. Aluminum cylinders should NOT be used in high-cycle applications such as production. These cylinders are designed to provide 5000 cycles at their recommended pressure. **This limit should not be exceeded.** In normal lifting and many maintenance applications, this should provide a lifetime of use.

Optional Bolt On Tilt Saddle Dimensions (in)


Cylinder Model / Capacity (ton)	Model Number	Saddle Diameter J1	Saddle Protrusion from Base K1
RAR-50	CATG-50	1.97	1.02
RAR-100	CATG-100	2.88	1.22
RAR-150	CATG-150	3.59	1.30



Steel Base Plate Mounting Holes

Cylinder Model / Capacity (ton)	Bolt Circle U (in)	Thread V (mm)	Thread Depth <sup>1)</sup> Z (in)
RAR-50	4.33	M6	.47
RAR-100	6.50	M6	.47
RAR-150	7.87	M6	.47

<sup>1)</sup> Including Base Plate Height of .25 inch. Four (4) baseplate bolts: M6

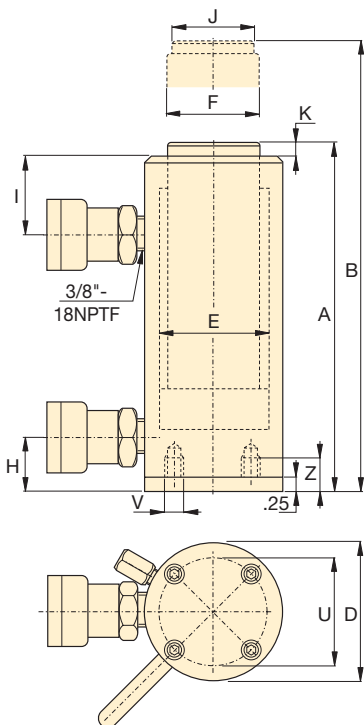

## RAR Series



Capacity:  
**50-150 tons**

Stroke:  
**1.97-7.87 inches**

Maximum Operating Pressure:  
**10,000 psi**



### Steel Base Plate

The steel base plate protects the cylinder base from damage, it should not be removed.

The base holes in these aluminum cylinders are designed for securing the steel base plate. **They will not withstand the capacity of the cylinder.**

Do not use the base holes in these aluminum cylinders to attach any device to the cylinder.



### Standard Features

- CR-400 coupler and dust cap
- All cylinders meet ASME B-30.1 and ISO 10100 standards.

Collapsed Height	Extended Height	Outside Diameter	Cylinder Bore Diameter	Plunger Diameter	Base to Advance Port	Top to Retract Port	Saddle Diameter	Saddle Protrusion from Plunger	Weight (lbs)	Model Number
A (in)	B (in)	D (in)	E (in)	F (in)	H (in)	I (in)	J (in)	K (in)		
7.91	9.88	5.71	3.74	2.95	1.19	2.20	1.97	.12	24.5	RAR-502
9.88	13.82	5.71	3.74	2.95	1.19	2.20	1.97	.12	28.0	RAR-504
11.85	17.76	5.71	3.74	2.95	1.19	2.20	1.97	.12	31.5	RAR-506
11.85	15.79	7.28	5.31	3.54	1.70	3.15	2.95	.12	42.6	RAR-1004
13.82	19.72	7.28	5.31	3.54	1.70	3.15	2.95	.12	48.9	RAR-1006
15.79	23.66	7.28	5.31	3.54	1.70	3.15	2.95	.12	55.3	RAR-1008
13.71	19.60	9.06	6.69	4.33	1.50	2.95	3.70	.12	73.2	RAR-1506

▼ Shown from left to right: CLP-2002, CLP-5002



## The Shortest Power Lifter

- Flat design for use in confined areas
- Safety lock nut for mechanical load holding
- Single-acting load return
- Special bearing design resists sideload forces
- Overflow port functions as a stroke limiter
- CR-400 coupler and dust cap included on all models



### Saddles

All CLP-Series cylinders include integral tilt saddles with maximum tilt angles up to 5°.



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the

System Components section for a full range of gauges.

Page: 117



### Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system,

specify only Enerpac hydraulic hoses.

Page: 118

▼ Only the extreme low height CLP-cylinder fits in this confined area to lift the construction. The V-82 needle valve is used to control cylinder speed during lifting and lowering.



Cylinder Capacity (ton) [maximum]	Stroke (in)	Model Number	Cylinder Effective Area (in <sup>2</sup> )	Oil Capacity (in <sup>3</sup> )
60 [67.1]	1.97	CLP-602	13.42	26.42
100 [113.7]	1.97	CLP-1002	22.75	44.78
160 [179.2]	1.77	CLP-1602	35.85	63.51
200 [221.3]	1.77	CLP-2002	44.27	78.43
250 [284.2]	1.77	CLP-2502	56.85	100.72
400 [433.6]	1.77	CLP-4002	86.72	153.64
500 [566.2]	1.77	CLP-5002	113.25	200.63

# Single-Acting, Pancake Lock Nut Cylinders



## Speed Chart

See the Enerpac Cylinder Speed Chart in our "Yellow Pages" to determine your approximate cylinder speed.

Page: 249



## Longer Stroke Lock Nut Cylinders

For lock nut applications that require longer stroke lengths, see **CLL-Series** heavy-duty cylinders.

Page: 44

## CLP Series



Capacity:


**60-500 tons**

Stroke:

**1.77-1.97 inches**

Maximum Operating Pressure:

**10,000 psi**

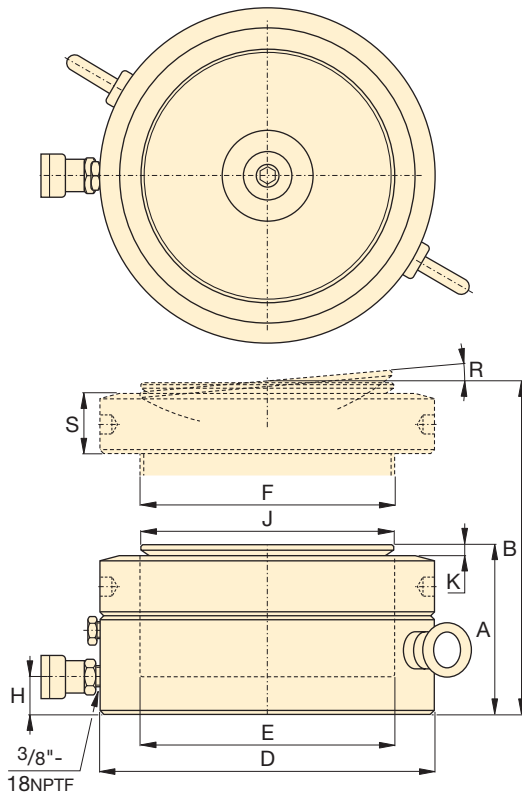


All CLP-series cylinders require a solid lifting surface for correct support.

Use of pancake cylinders on surfaces such as sand, mud or dirt may result in cylinder damage!



**WRONG!**

Rough soil



**RIGHT!**

Flat lifting surface

For more safety instructions see our "Yellow Pages".

Page: 239

Collapsed Height	Extended Height	Outside Diameter	Cyl. Bore Diameter	Plunger Diameter	Base to Advance Port	Saddle Diameter	Saddle Protrusion from Plngr.	Saddle Max. Tilt Angle	Lock Nut Height	Weight	Model Number
A (in)	B (in)	D (in)	E (in)	F (mm)	H (in)	J (in)	K (in)	R	S (in)	(lbs)	
4.92	6.89	5.51	4.13	Tr 104 x 4	.75	3.78	.24	5°	1.10	33	CLP-602
5.39	7.36	6.89	5.38	Tr 136 x 6	.83	4.96	.31	5°	1.22	57	CLP-1002
5.83	7.60	8.66	6.76	Tr 171 x 6	1.06	6.30	.35	5°	1.57	97	CLP-1602
6.10	7.87	9.65	7.51	Tr 190 x 6	1.18	7.09	.39	5°	1.69	125	CLP-2002
6.26	8.03	10.83	8.51	Tr 216 x 6	1.26	7.87	.43	5°	1.73	163	CLP-2502
7.01	8.78	13.78	10.51	Tr 266 x 6	1.54	9.84	.43	4°	2.17	295	CLP-4002
7.56	9.33	15.75	12.01	Tr 305 x 6	1.89	11.42	.39	3°	2.44	416	CLP-5002

▼ Shown from left to right: RSM-1000, RSM-300, RSM-50, RCS-1002, RCS-302



## Maximum Power to Height Ratio



### Saddles

All RCS-Series cylinders have plunger mounting holes for installation of tilt saddles. See table for selection and dimensional information.

Page: 23



### Low Clearance Lifting

The LW-16 Lifting Wedge and SOH-Series Machine Lifts are the perfect choices for lifting loads that have low clearance.

Page: 165

### RSM-Series, Flat-Jac® Cylinders

- Compact, flat design for use where other cylinders will not fit
- RSM-750, 1000 and 1500 have handles for easy carrying
- Mounting holes permit easy fixturing
- Baked enamel finish for increased corrosion resistance
- CR-400 coupler and dust cap included on all models\*
- Hard chrome plated high-quality steel plungers
- Grooved plunger ends require no saddle
- Single-acting spring return

### RCS-Series, Low Height Cylinders

- Lightweight, low profile design for use in confined spaces
- Baked enamel finish for increased corrosion resistance
- Plunger wiper reduces contamination, extending cylinder life
- CR-400 coupler and dust cap included on all models
- Grooved plunger end with threaded holes for mounting tilt saddles
- Integral handle on RCS-1002 for easy carrying
- Plated steel plungers
- Single-acting spring return

▼ Only a couple of inches are needed for an RSM-cylinder to lift this large steel construction.




Cylinder Capacity	Stroke	Model Number	Cyl. Effect. Area	Oil Cap.
(tons) [max.]	(in)		(in <sup>2</sup> )	(in <sup>3</sup> )
5 [4.9]	.25	RSM-50*	.99	.25
10 [11.2]	.44	RSM-100	2.24	.98
20 [22.1]	.44	RSM-200	4.43	1.94
30 [32.4]	.50	RSM-300	6.49	3.25
50 [48.1]	.63	RSM-500	9.62	6.01
75 [79.5]	.63	RSM-750	15.90	9.94
100 [98.1]	.63	RSM-1000	19.63	12.27
150 [153.4]	.63	RSM-1500	30.68	19.17
10 [11.2]	1.50	RCS-101**	2.24	3.35
20 [22.1]	1.75	RCS-201**	4.43	7.75
30 [32.4]	2.44	RCS-302**	6.49	15.82
50 [48.1]	2.38	RCS-502**	9.62	22.85
100 [98.1]	2.25	RCS-1002**	19.63	44.18

\* RSM-50 is fitted with an AR-400 coupler.

\*\* Available as a set. See note on next page.



# Single-Acting, Low Height Cylinders



## Pump and Cylinder Sets

All cylinders marked with an \*\* are available as sets (cylinder, gauge, couplers, hose and pump) for your ordering convenience.

Page: 58

## RSM RCS Series



Capacity:

**5-150 tons**

Stroke:


**.25-2.44 inches**

Maximum Operating Pressure:


**10,000 psi**

### Optional Bolt On Tilt Saddle Dimensions (in)

For cylinder model:	Model Number	A	B	C*
RCS-101	CAT-11	1.38	.43	.83
RCS-201, -302, -502	CAT-51	1.97	.59	1.14
RCS-1002	CAT-101	2.80	.67	1.39



\* "C" dimension equals saddle protrusion from plunger. Mounting screws are included.

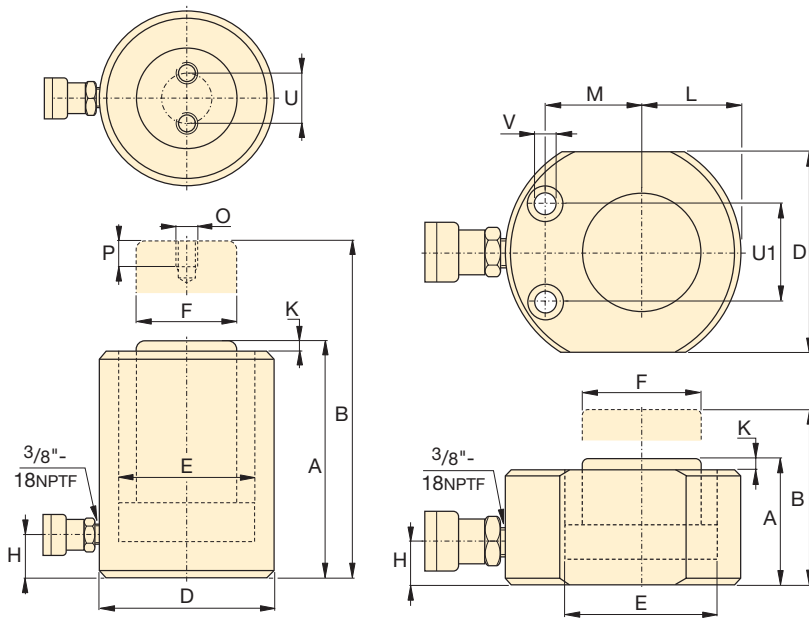

RCS-Series

RSM-Series

\* 5° angle position of coupler on RCS-101, 201, 302.

### RSM Cylinder Mounting Hole Dimensions (in)

Model Number	Hole Pitch U1	Hole Diam. V	Counter Bore Diam.	Counter Bore Depth
RSM-50	1.12	.20	.312	.17
RSM-100	1.44	.28	.422	.31
RSM-200	1.94	.40	.594	.39
RSM-300	2.06	.40	.625	.44
RSM-500	2.62	.47	.750	.50
RSM-750	3.00	.53	.812	.56
RSM-1000	3.00	.53	.812	.56
RSM-1500	4.62	.53	.812	.56

Collapsed Height	Extended Height	Outside Diameter	Cylinder Bore Diameter	Plunger Diameter	Base to Advance Port	Plunger Protrusion from Base	Plunger to Base	Plunger to Mtg. Hole	Thread	Thread Depth	Bolt Circle	Weight	Model Number
A (in)	B (in)	D (in)	E (in)	F (in)	H (in)	K (in)	L (in)	M (in)	O (mm)	P (in)	U (in)	(lbs)	
1.28	1.53	2.31 x 1.63	1.13	1.00	.63	.04	.81	.88	-	-	-	2.3	RSM-50*
1.69	2.13	3.25 x 2.19	1.69	1.50	.75	.04	1.09	1.34	-	-	-	3.1	RSM-100
2.03	2.47	4.00 x 3.00	2.38	2.00	.75	.04	1.56	1.56	-	-	-	6.8	RSM-200
2.31	2.81	4.63 x 3.75	2.88	2.50	.75	.08	1.88	1.75	-	-	-	10	RSM-300
2.63	3.25	5.50 x 4.50	3.50	2.75	.75	.08	2.25	2.13	-	-	-	15	RSM-500
3.13	3.75	6.50 x 5.50	4.50	3.25	.75	.08	2.75	2.63	-	-	-	25	RSM-750
3.38	4.00	7.00 x 6.00	5.00	3.63	.75	.08	3.00	2.94	-	-	-	32	RSM-1000
3.94	4.56	8.50 x 7.50	6.25	4.50	.94	.08	3.75	3.25	-	-	-	58	RSM-1500
3.47	4.97	2.75	1.69	1.50	.69	.20	-	-	M4	.32	1.03	9	RCS-101**
3.88	5.63	3.63	2.38	2.00	.69	.13	-	-	M5	.32	1.57	11	RCS-201**
4.63	7.06	4.00	2.88	2.62	.75	.13	-	-	M5	.32	1.57	15	RCS-302**
4.81	7.19	4.88	3.50	2.75	.94	.08	-	-	M5	.32	1.57	24	RCS-502**
5.56	7.81	6.50	5.00	3.63	1.25	.06	-	-	M8	.40	2.17	50	RCS-1002**

▼ Shown from left to right: BRC-25, BRC-46, BRP-306, BRP-606, BRP-106C




- High strength alloy steel construction
- Plunger blow-out protection to prevent over-extension
- Hard chrome-plated plunger for long life
- Baked enamel finish for increased corrosion resistance
- CR-400 coupler and dust cap included on all models
- Plunger wiper reduces contamination, extending cylinder life
- Single-acting spring-return
- Replaceable links on BRP-models

▼ Ship building, welding and Enerpac pull cylinders go hand in hand.



## The Ultimate in Pulling Power



### Pump and Cylinder Sets

All cylinders marked with an \* are available as **sets** (cylinder, gauge, couplers, hose and pump) for your ordering convenience.

Page: 58



### Gauges

Minimize the risk of over-loading and ensure long, dependable service from your equipment. Refer to the

System Components section for a full range of gauges.

Page: 117



### Attachments and Accessories

The BRC-25 and BRC-46 units have base, collar and plunger threads to affix

a range of optional attachments and accessories, such as chains, saddles and extension tubes.

Page: 166

▼ To lift a load bearing mast into place, BRP cylinders were used to tension the supporting cables.



# Single-Acting, Pull Cylinders

BRC Cylinder Mounting Dimensions (in)				
Model Number	Base Mounting Hole	Collar Thread	Collar Thread Length	Mtg. Thread Length
	V	W	X	Z
<b>BRC-25</b>	3/4"-14 NPT	1 1/2"-16 UN	.98	.67
<b>BRC-46</b>	1 1/4"-11 1/2" NPT	2 1/4"-14 UN	1.06	.98
<b>BRC-106</b>	M30 x 2	M85 x 2	1.02	.98


**BRC  
BRP  
Series**



Capacity:  
**2.5-60 tons**

Stroke:  
**5.00-6.00 inches**


Maximum Operating Pressure:  
**10,000 psi**

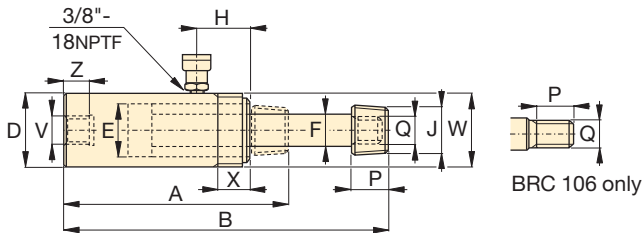


BRC 106 only

**BRC-25 to BRC-106**


Cylinder Capacity	Stroke	Model Number	Cyl. Effect. Area	Oil Cap.	Collap. Height	Ext. Height	Outside Diam.	Cyl. Bore Diam.	Plgr. Diam.	Top to Inlet Port	Saddle Diameter	Plunger Thread Length	Plunger Outside Thread	Weight
(tons) [maximum]	(in)		(in <sup>2</sup> )	(in <sup>3</sup> )	A (in)	B (in)	D (in)	E (in)	F (in)	H (in)	J (in)	P (in)	Q	(lbs)
<b>2.5</b> [2.7]	5.00	<b>BRC-25</b>	.55	2.76	10.44	15.44	1.89	1.13	.75	1.77	3/4"-14 NPT	1.13	1 1/16"-24	4
<b>5</b> [5.6]	5.50	<b>BRC-46</b>	1.13	6.21	11.88	17.38	2.25	1.69	1.19	1.69	1 1/4"-11 1/2" NPT	1.25	1 3/16"-16	10
<b>10</b> [11.6]	5.95	<b>BRC-106</b>	2.32	13.80	11.38	17.33	3.35	2.13	1.25	1.57	-	1.02	M30x2	21

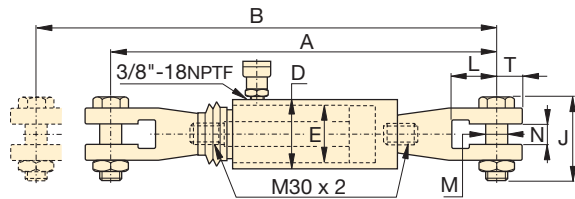


**BRP-106C**

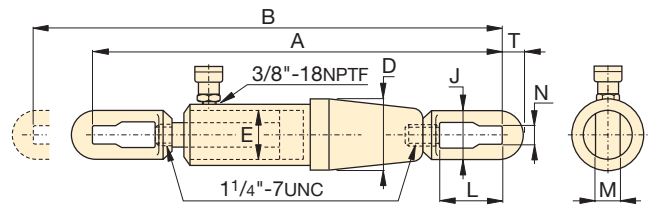

**BRP-306**

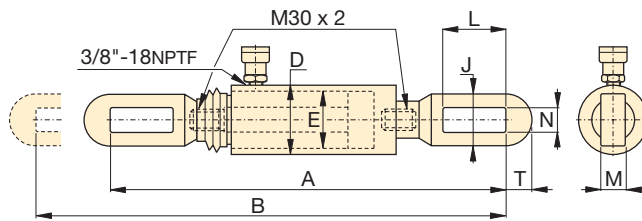

**BRP-106L**

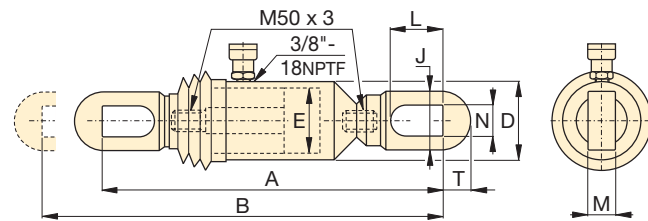

**BRP-606**

Cylinder Capacity	Stroke	Model Number	Cyl. Effect. Area	Oil Capacity	Collap. Height	Ext. Height	Outside Diam.	Cyl. Bore Diam.	Link Height	Link Opening	Link Thickness	Link Width	Slot to Link End	Weight
(tons) [maximum]	(in)		(in <sup>2</sup> )	(in <sup>3</sup> )	A (in)	B (in)	D (in)	E (in)	J (in)	L (in)	M (in)	N (in)	T (in)	(lbs)
<b>10</b> [11.6]	6.00	<b>BRP-106C*</b>	2.32	13.80	23.11	29.06	3.35	2.13	4.72	2.44	1.19	1.38	1.26	35
	6.00	<b>BRP-106L*</b>	2.32	13.80	22.24	28.19	3.35	2.13	2.64	4.53	0.88	1.19	1.26	24
<b>30</b> [36.1]	6.00	<b>BRP-306*</b>	7.22	43.27	42.72	48.82	5.39	3.50	4.49	5.71	1.38	1.57	1.97	106
<b>60</b> [58.8]	6.00	<b>BRP-606*</b>	11.78	70.43	28.34	34.32	5.51	4.33	5.13	5.90	1.57	1.97	2.76	118

Note: BRP-106C, BRP-106L and BRP-606 are fitted with rubber bellows for rod protection.

\*Available as a set. See note on previous page. Please refer to drawings above for BRP-106C and BRP-106L.

▼ Shown from left to right: RCH-306, RCH-120, RCH-1003




- Hollow plunger design allows for both pull and push forces
- Single-acting spring return
- Nickel-plated, floating center tube on models over 20 tons increases product life
- Baked enamel finish for increased corrosion resistance
- Collar threads for easy fixturing
- RCH-120 includes AR-630 coupler and has 1/4 NPTF port
- RCH-121 and RCH-1211 have FZ-1630 reducer and AR-630 coupler, all other models feature CR-400 coupler

▼ Hollow plunger cylinder RCH-1003 used in an application for intermediate boom suspension on a dragline.




## Versatility in Testing, Maintenance and Tensioning Applications

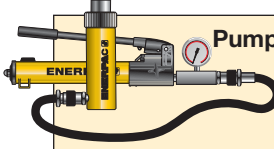

**Pump and Cylinder Sets**  
All cylinders marked with an \* are available as sets (cylinder, gauge, couplers, hose and pump) for your ordering convenience.  
**Page: 58**



**Lightweight Aluminum Hollow Plunger Cylinders**  
If you need a higher cylinder capacity-to-weight ratio the lightweight RACH-Series Aluminum Hollow Plunger Cylinders are the perfect choice.  
**Page: 16**



**Saddles**  
Most RCH-Series cylinders are equipped with smooth saddles. See table at next page for optional threaded saddles and all dimensional information.  
**Page: 27**

Cylinder Capacity (tons) [maximum]	Stroke (in)	Model Number	Cyl. Effect. Area (in <sup>2</sup> )	Oil Cap. (in <sup>3</sup> )
12 [13.8]	0.31	RCH-120	2.76	0.86
	1.63	RCH-121*	2.76	4.49
	1.63	RCH-1211	2.76	4.49
	3.00	RCH-123	2.76	8.29
20 [23.6]	2.00	RCH-202*	4.73	9.46
	6.10	RCH-206	4.73	28.67
30 [36.1]	2.50	RCH-302*	7.22	18.05
	6.13	RCH-306	7.22	44.23
60 [63.6]	3.00	RCH-603*	12.73	38.20
	6.00	RCH-606	12.73	76.41
100 [103.1]	3.00	RCH-1003*	20.63	61.88

\* Available as a set. See note on this page.

# Single-Acting, Hollow Plunger Cylinders



## Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: **118**

## RCH Series



Capacity:

**12-100 tons**

Stroke:

**.31-6.13 inches**

Center Hole Diameter:


**.77-3.11 inches**

Maximum Operating Pressure:

**10,000 psi**


### Optional Heat Treated Hollow Saddles

Saddle Type	Cylinder Model No.	Saddle Model No.	Saddle Dimensions (in)		
			A	B	C
Threaded Hollow	RCH-202, 206	HP-2015	2.11	1"-8	.38
	RCH-302, 306	HP-3015	2.49	1 1/4"-7	.38
	RCH-603, 606	HP-5016	3.61	1 5/8"-5 1/2"	.50
	RCH-1003	HP-10016	4.97	2 1/2"-8	.51




Smooth hollow saddles are standard on all RCH-models (12-ton models are not equipped with saddles).

RCH-121 and RCH-1211 have a 1.88" diameter boss that protrudes 0.25" from base.

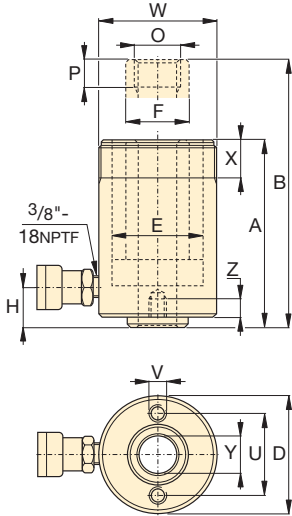

RCH-120 to RCH-123 models

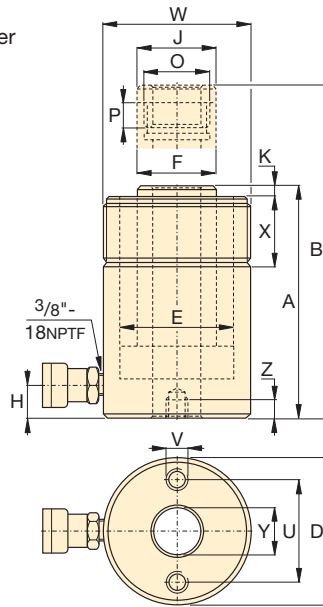

RCH-202 to RCH-1003 models

\* 1/4" NPT for RCH-120 only

### Base Mounting Hole Dimensions (in)

Model Number	Bolt Circle		
	U	V	Z
RCH-120	2.00	5/16"-18 UNC	.35
RCH-121	-	-	-
RCH-1211	-	-	-
RCH-123	2.00	5/16"-18 UNC	.50
RCH-202	3.25	3/8"-16 UNC	.37
RCH-206	3.25	3/8"-16 UNC	.37
RCH-302	3.63	3/8"-16 UNC	.55
RCH-306	3.63	3/8"-16 UNC	.55
RCH-603	5.13	1/2"-13 UNC	.55
RCH-606	5.13	1/2"-13 UNC	.55
RCH-1003	7.00	5/8"-11 UNC	.75

Collap. Height	Ext. Height	Outside Diam.	Cyl. Bore Diam.	Plngr. Diam.	Cyl. Base to Advance Port	Saddle Diameter	Saddle Protrusion from Plngr.	Plunger Internal Thread	Plunger Thread Length	Collar Thread	Collar Thread Length	Center Hole Diam.	Weight	Model Number
A (in)	B (in)	D (in)	E (in)	F (in)	H (in)	J (in)	K (in)	O (in)	P (in)	W (in)	X (in)	Y (in)	(lbs)	
2.19	2.50	2.75	2.13	1.38	.38	-	-	3/4"-16 UN	.63	2 3/4"-16	1.19	.77	3.2	RCH-120
4.75	6.38	2.75	2.13	1.38	.75	-	-	-	-	2 3/4"-16	1.19	.77	6.2	RCH-121*
4.75	6.38	2.75	2.13	1.38	.75	-	-	3/4"-16 UN	.63	2 3/4"-16	1.19	.77	6.2	RCH-1211
7.25	10.25	2.75	2.13	1.38	.75	-	-	-	-	2 3/4"-16	1.19	.77	9.8	RCH-123
6.38	8.38	3.88	2.88	2.13	.75	2.13	.27	1 1/16"-16 UN	.75	3 7/8"-12	1.50	1.06	17	RCH-202*
12.05	18.11	3.88	2.88	2.13	.75	2.13	.27	1 1/16"-16 UN	.75	3 7/8"-12	1.50	1.06	31	RCH-206
7.03	9.53	4.50	3.50	2.50	.85	2.50	.38	1 13/16"-16 UN	.88	4 1/2"-12	1.66	1.31	24	RCH-302*
13.00	19.13	4.50	3.50	2.50	1.00	2.50	.38	1 13/16"-16 UN	.88	4 1/2"-12	1.66	1.31	48	RCH-306
9.75	12.75	6.25	4.88	3.63	1.25	3.61	.50	2 3/4"-16 UN	.75	6 1/4"-12	1.91	2.12	62	RCH-603*
12.75	18.75	6.25	4.88	3.63	1.25	3.61	.50	2 3/4"-16 UN	.75	6 1/4"-12	1.91	2.12	78	RCH-606
10.00	13.00	8.38	6.50	5.00	1.50	4.97	.50	4"-16 UN	1.00	8 7/8"-12	2.38	3.11	132	RCH-1003*

▼ Shown from left to right: RRH-3010, RRH-1001, RRH-6010



## Versatility in Testing, Maintenance and Tensioning Applications



### Pump Selection

A double-acting cylinder must be powered by a pump with a 4-way valve.

Page: 61



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 117



### Saddles

All RRH-Series cylinders are equipped with smooth saddles. See table on next page for optional threaded saddles and all dimensional information.

Page: 29

- Relief valves prevent damage in case of over-pressurization
- Baked enamel finish for increased corrosion resistance
- Collar threads enable easy fixturing (except RRH-1001 and RRH-1508)
- Double-acting operation for fast retraction
- Nickel-plated, floating center tube increases product life
- Hollow plunger allows for both pull and push forces
- CR-400 couplers and dust caps included on all models
- Plunger wiper reduces contamination, extending cylinder life

▼ Double-acting hollow plunger cylinders are applied for bridge launching systems.



Cylinder Capacity (ton)	Stroke (in)	Model Number	Max. Cylinder Capacity (ton)		Cylinder Effective Area (in <sup>2</sup> )		Oil Capacity (in <sup>3</sup> )	
			Advance	Retract	Advance	Retract	Advance	Retract
30	7.00	RRH-307	36	24	7.22	4.71	50.55	32.99
	10.13	RRH-3010	36	24	7.22	4.71	73.12	47.71
60	3.50	RRH-603	64	42	12.73	8.37	44.57	29.21
	6.50	RRH-606	64	42	12.73	8.37	82.77	54.24
	10.12	RRH-6010	64	42	12.73	8.37	128.94	84.49
100	1.50	RRH-1001	103	68	20.63	13.54	30.94	20.32
	3.00	RRH-1003	103	68	20.63	13.54	61.88	40.64
	6.00	RRH-1006	103	68	20.63	13.54	123.76	81.29
	10.13	RRH-10010	103	68	20.63	13.54	208.84	137.17
150	8.00	RRH-1508	158	80	31.62	15.91	252.97	127.23

# Double-Acting, Hollow Plunger Cylinders



## Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 118

## RRH Series



Capacity:

**30-150 tons**

Stroke:

**1.50-10.13 inches**

Center Hole Diameter:


**1.31-3.13 inches**

Maximum Operating Pressure:


**10,000 psi**

### Optional Heat Treated Saddles

Saddle Type	Cylinder Model Number	Saddle Model No.	Saddle Dimensions (in)		
			A	B	C
Threaded Hollow	RRH-307, 3010	HP-3015	2.49	1 1/4" - 7	.38
	RRH-603, 606, 6010	HP-5016	3.61	1 5/8" - 5 1/2	.50
	RRH-1001, 1003, RRH-1006, 10010	HP-10016	4.97	2 1/2" - 8	.51



Smooth hollow saddles are standard on all RRH-models.

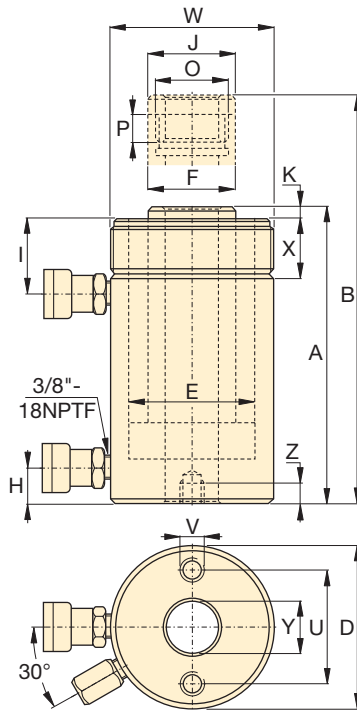

### Base Mounting Hole Dimensions (in)

Model Number	Bolt Circle	Thread	Thread Depth
	U	V	Z
RRH-307	3.63	3/8" - 16	.62
RRH-3010	3.63	3/8" - 16	.62
RRH-603	5.12	1/2" - 13	.55
RRH-606	5.12	1/2" - 13	.55
RRH-6010	5.12	1/2" - 13	.55
RRH-1001	7.00	5/8" - 11	.75
RRH-1003	7.00	5/8" - 11	.75
RRH-1006	7.00	5/8" - 11	.75
RRH-10010	7.00	5/8" - 11	.75
RRH-1508	-	-	-

Collap. Height	Ext. Height	Out. Diam.	Cyl. Bore Diam.	Plngr. Diam.	Cyl. Base to Adv. Port	Cyl. Top to Return Port	Saddle Diam.	Saddle Protrusion from Plngr.	Thread	Plunger Thread Length	Collar Thread	Collar Thread Length	Center Hole Diam.	Wt.	Model Number
A	B	D	E	F	H	I	J	K	O	P	W	X	Y	(lbs)	
(in)	(in)	(in)	(in)	(in)	(in)	(in)	(in)	(in)	(in)	(in)	(in)	(in)	(in)		
13.00	20.00	4.50	3.50	2.50	1.00	2.38	2.50	.38	1 13/16" - 16	.88	4 1/2" - 12	1.66	1.31	48	RRH-307
17.00	27.13	4.50	3.50	2.50	1.00	2.38	2.50	.38	1 13/16" - 16	.88	4 1/2" - 12	1.66	1.31	60	RRH-3010
9.75	13.25	6.25	4.88	3.63	1.25	2.63	3.61	.50	2 3/4" - 16	.75	6 1/4" - 12	1.91	2.13	62	RRH-603
12.75	19.25	6.25	4.88	3.63	1.25	2.63	3.61	.50	2 3/4" - 16	.75	6 1/4" - 12	1.91	2.13	78	RRH-606
17.25	27.38	6.25	4.88	3.63	1.25	2.63	3.61	.50	2 3/4" - 16	.75	6 1/4" - 12	1.91	2.13	101	RRH-6010
6.50	8.00	8.38	6.50	5.00	1.50	1.75	4.97	.50	4" - 16	1.00	-	-	3.13	85	RRH-1001
10.00	13.00	8.38	6.50	5.00	1.50	3.38	4.97	.50	4" - 16	1.00	8 3/8" - 12	2.38	3.13	135	RRH-1003
13.50	19.50	8.38	6.50	5.00	1.50	3.38	4.97	.50	4" - 16	1.00	8 3/8" - 12	2.38	3.13	175	RRH-1006
18.13	28.25	8.38	6.50	5.00	1.50	3.38	4.97	.50	4" - 16	1.00	8 3/8" - 12	2.38	3.13	235	RRH-10010
13.75	21.75	9.75	7.50	6.00	1.50	2.38	5.00	.19	4 1/4" - 12	1.00	-	-	3.13	245	RRH-1508

▼ Shown from left to right: RD-2510, RD-96, RD-256, RD-41, RD-166



## High Precision and High Cycle Performance



### Speed Chart

See the Enerpac Cylinder Speed Chart in our 'Yellow Pages' to determine your approximate cylinder speed.

Page: 249



### Golden Ring Design

Enerpac RD cylinders are provided with the Golden Ring Design, for long, trouble-free performance.

- Designed for long life, the best choice for production applications
- Unique mounting configurations simplify fixturing
- Baked enamel finish for increased corrosion resistance
- Double-acting operation develops force in both directions, providing maximum versatility
- Plunger wiper reduces contamination, extending cylinder life

▼ Clamping application using Enerpac RD cylinders (with clevis eye attachments on both ends) for their high-pressure capability and mounting flexibility.




Cylinder Capacity (tons)	Stroke (in)	Model Number	Max. Cylinder Capacity (tons)		Cylinder Effective Area (in <sup>2</sup> )		Oil Capacity (in <sup>3</sup> )		Collap. Height	Ext. Height	Body Length	Outside Diam.	Cylinder Bore Diam.	Plunger Diam.
			Advance	Retract	Advance	Retract	Advance	Retract	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)
4	1.13	RD-41	4	2	.79	.34	.88	.39	7.31	8.44	6.38	2.00	1.00	.75
	3.13	RD-43	4	2	.79	.34	2.45	1.07	9.31	12.44	8.38	2.00	1.00	.75
	6.13	RD-46	4	2	.79	.34	4.81	2.10	12.31	18.44	11.38	2.00	1.00	.75
9	1.13	RD-91	9	5	1.77	.98	1.99	1.10	8.75	9.88	7.80	2.50	1.50	1.00
	3.13	RD-93	9	5	1.77	.98	5.52	3.07	10.78	13.91	9.80	2.50	1.50	1.00
	6.13	RD-96	9	5	1.77	.98	10.82	6.01	13.78	19.91	12.80	2.50	1.50	1.00
	10.13	RD-910	9	5	1.77	.98	17.89	9.94	17.78	27.91	16.81	2.50	1.50	1.00
16	6.25	RD-166	16	8	3.14	1.66	19.63	10.35	15.31	21.56	14.13	3.00	2.00	1.38
	10.25	RD-1610	16	8	3.14	1.66	32.20	16.98	19.31	29.56	18.11	3.00	2.00	1.38
25	6.25	RD-256	25	11	4.91	2.15	30.68	13.42	16.69	22.94	15.63	3.63	2.50	1.88
	10.25	RD-2510	25	11	4.91	2.15	50.31	22.01	20.69	30.94	19.61	3.63	2.50	1.88




# Double-Acting, Precision Production Cylinders


## ▼ RD CYLINDER ATTACHMENTS




**Retainer Nut**  
For locking foot or flange mountings. Tightens onto cylinder collar threads (included with foot and flange mounting kits)



**Foot Mounting**  
Mounts onto cylinder collar



**Flange Mounting**  
Mounts onto cylinder collar



**Clevis Eye**  
Threads onto plunger or into cylinder base

Model Number	RD-Cyl: (tons)	Dimensions (in)						
		A	B	C	D	E	F	H
<b>Foot Mounting with Retainer Nut</b>								
AD-141	4	1.38	3.00	2.00	.41	.76	2.25	1.25
AD-171	9	2.00	4.00	2.88	.53	1.00	3.25	1.75
AD-181	16	2.63	5.00	3.76	.78	1.38	4.00	2.06
AD-191	25	3.25	6.26	4.62	1.03	1.76	4.88	2.50
<b>Flange Mounting with Retainer Nut</b>								
AD-142	4	1.38	3.88	3.09	.41	.75	-	-
AD-172	9	2.00	4.75	3.88	.41	1.00	-	-
AD-182	16	2.63	5.63	4.56	.53	1.38	-	-
AD-192	25	3.25	6.50	5.34	.66	1.75	-	-
<b>Retainer Nut</b>								
AD-143	4	1 3/8"-12 UNF	2.25	1.81	.25	.38	-	-
AD-173	9	2"-12	3.00	2.50	.27	.50	-	-
AD-183	16	2 5/8"-16	3.63	3.12	.27	.75	-	-
AD-193	25	3 1/4"-16	4.25	3.75	.27	1.00	-	-
<b>Clevis Eye</b>								
AD-150	4	1/2"-20	1 1/8"-20	1.12	.63	.63	.75	.94
AD-151	9	3/4"-16	1 1/16"-18	1.31	.75	1.00	1.00	.94
AD-152	16	1 1/8"-12	2 3/16"-16	1.88	1.00	1.25	1.00	1.19
AD-153	25	1 1/2"-12	2 3/4"-16	2.00	1.25	1.50	1.00	1.06


## RD Series



Capacity:  
**4-25 tons**

Stroke:  
**1.13-10.25 inches**

Maximum Operating Pressure:  
**10,000 psi**

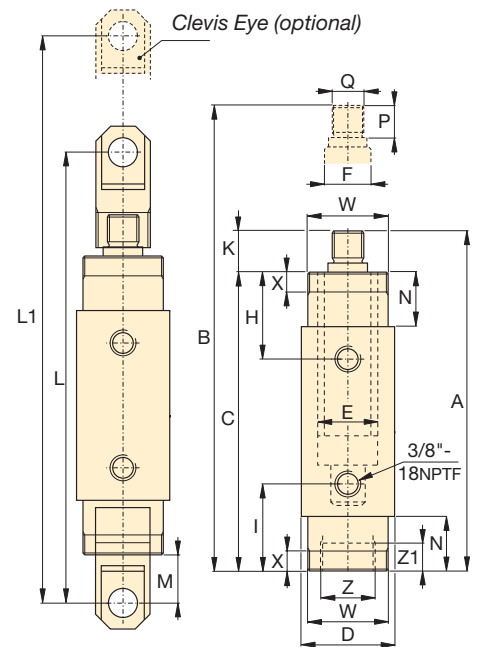

Top to Ret. Port H (in)	Bottom to Adv. Port I (in)	Plunger Protrusion K (in)	Clevis Eye Mounting Dimensions			Neck Length N (in)	Plunger Thread Length P (in)	Plunger External Thread Q (in)	Cylinder Mounting Dimensions (in)				Wt. (lbs)	Model Number
			L (in)	L1 (in)	M (in)				Collar Thread W	Collar Thread Length X	Int. Base Thread Z	Int. Base Thread Length Z1		
1.88	1.88	.94	10.12	11.25	1.61	1.13	.75	1/2"-20	1 3/8"-12	.44	1 1/8"-20	.35	4.8	RD-41
1.88	1.88	.94	12.12	15.25	1.61	1.13	.75	1/2"-20	1 3/8"-12	.44	1 1/8"-20	.35	6.4	RD-43
1.88	1.88	.94	15.12	21.25	1.61	1.13	.75	1/2"-20	1 3/8"-12	.44	1 1/8"-20	.35	9.0	RD-46
2.27	2.27	.98	11.61	12.76	1.50	1.50	.75	3/4"-16	2"-12	.56	1 1/16"-18	.55	9.0	RD-91
2.27	2.27	.98	13.66	16.79	1.50	1.50	.75	3/4"-16	2"-12	.56	1 1/16"-18	.55	11.0	RD-93
2.27	2.27	.98	16.66	22.79	1.50	1.50	.75	3/4"-16	2"-12	.56	1 1/16"-18	.55	14.0	RD-96
2.27	2.27	.98	20.66	30.79	1.50	1.50	.75	3/4"-16	2"-12	.56	1 1/16"-18	.55	19.0	RD-910
2.90	2.90	1.19	19.32	25.57	2.05	2.13	1.00	1 1/8"-12	2 5/8"-16	.88	2 3/16"-16	.94	22.0	RD-166
2.90	2.90	1.19	23.32	33.57	2.05	2.13	1.00	1 1/8"-12	2 5/8"-16	.88	2 3/16"-16	.94	29.0	RD-1610
3.50	3.50	1.06	20.86	27.11	2.09	2.75	1.00	1 1/2"-12	3 5/8"-16	1.13	2 3/4"-16	1.02	36.0	RD-256
3.50	3.50	1.08	24.86	35.11	2.09	2.75	1.00	1 1/2"-12	3 1/4"-16	1.13	2 3/4"-16	1.02	46.0	RD-2510

▼ Shown from left to right: RR-10013, RR-1502, RR-20013, RR-1010, RR-7513



- Collar threads, plunger threads and base mounting holes for easy fixturing (on most models)
- Baked enamel finish for increased corrosion resistance
- Removable hardened saddles protect plunger during lifting and pressing
- Built-in safety valve prevents accidental over-pressurization
- CR-400 couplers included on all models
- Plunger wiper reduces contamination, extending cylinder life

## Most Versatile Performers

Rugged enough for the toughest job site uses and precision designed for high-cycle industrial uses.



### Pump Selection

A double-acting cylinder must be powered by a pump with a 4-way valve.

Page: 61



### Saddles

RR-Series cylinders up to 75-ton have plunger thread for installation of CAT-Series tilt saddles.

Page: 33



### Optimum Performance

Enerpac's range of ZU4 electric pumps, fitted with manual or solenoid operated 4-way valves,

offer optimum combinations with RR cylinders.

Page: 82

▼ These long stroke RR-cylinders are attached to a sliding and guiding system pulling the arched roof assembly of Athen's Olympic Stadium step by step into the final position.



▼ RR-cylinders provide power and precision in a special hydraulic press.



# Double-Acting Long Stroke Cylinders

## RR Series



### ▼ QUICK SELECTION CHART

For complete technical information see next page.

Cylinder Capacity (tons)	Stroke (in)	Model Number	Cylinder Effective Area (in <sup>2</sup> )		Oil Capacity (in <sup>3</sup> )		Collap. Height (in)
			Push	Pull	Push	Pull	
10	10.00	RR-1010*	2.23	.80	22.33	8.00	16.13
	12.00	RR-1012*	2.23	.80	26.80	9.00	18.00
30	8.25	RR-308*	6.51	3.00	53.67	25.00	15.25
	14.50	RR-3014*	6.51	3.00	92.70	43.00	21.63
50	6.13	RR-506	11.06	3.40	67.77	21.00	13.06
	13.13	RR-5013	11.06	3.40	145.17	44.00	20.06
	20.13	RR-5020	11.06	3.40	222.56	68.00	28.88
75	6.13	RR-756	15.92	4.90	97.58	29.00	13.69
	13.13	RR-7513	15.92	4.90	209.00	64.00	20.69
100	6.63	RR-1006	20.65	9.60	136.93	63.00	14.06
	13.13	RR-10013	20.65	9.60	271.17	126.00	20.63
	18.13	RR-10018	20.65	9.60	374.44	174.00	27.06
150	2.25	RR-1502	30.71	14.80	69.11	33.00	7.72
	6.13	RR-1506	30.71	14.80	188.28	91.00	15.19
	13.13	RR-15013	30.71	14.80	403.27	194.00	22.20
	32.13	RR-15032	30.71	14.80	986.84	475.00	43.94
200	6.00	RR-2006	44.21	22.50	265.28	135.00	16.94
	13.00	RR-20013	44.21	22.50	574.78	293.00	23.94
	18.00	RR-20018	44.21	22.50	795.85	396.00	30.13
	24.00	RR-20024	44.21	22.50	1,061	528.00	36.13
	36.00	RR-20036	44.21	22.50	1,592	792.00	48.13
300	48.00	RR-20048	44.21	22.50	2,122	1,056	60.13
	6.00	RR-3006	70.93	38.00	425.56	228.00	19.13
	12.00	RR-30012	70.93	38.00	851.12	456.00	25.13
	18.00	RR-30018	70.93	38.00	1,277	684.00	31.13
	24.00	RR-30024	70.93	38.00	1,702	912.00	37.13
400	36.00	RR-30036	70.93	38.00	2,553	1,368	49.13
	48.00	RR-30048	70.93	38.00	3,405	1,824	61.13
	6.00	RR-4006	95.09	51.00	570.51	306.00	21.19
	12.00	RR-40012	95.09	51.00	1,141	612.00	27.19
	18.00	RR-40018	95.09	51.00	1,712	918.00	33.19
500	24.00	RR-40024	95.09	51.00	2,282	1,224	39.19
	36.00	RR-40036	95.09	51.00	3,423	1,836	51.19
	48.00	RR-40048	95.09	51.00	4,564	2,448	63.19
	6.00	RR-5006	113.15	63.00	678	378.00	22.75
	12.00	RR-50012	113.15	63.00	1,358	756.00	28.75
500	18.00	RR-50018	113.15	63.00	2,037	1,134	34.75
	24.00	RR-50024	113.15	63.00	2,716	1,512	40.75
	36.00	RR-50036	113.15	63.00	4,074	2,264	52.75
500	48.00	RR-50048	113.15	63.00	5,431	3,024	64.75

\* For RR-1010 and RR-1012: N = 1.26 inch; for RR-308 and RR-3014: N = 2.20 inch.

Capacity:

**10-500 tons**

Stroke:

**2.25-48.00 inches**

Maximum Operating Pressure:

**10,000 psi**



### Energpac CLRG-Series

If you do not have a high cycle application, Energpac CLRG-Series cylinders may be the right alternative.

Page: 40



### Speed Chart

See the Energpac Cylinder Speed Chart in our "Yellow Pages" to determine your approximate cylinder speed.

Page: 249



### Optional Snap-in Saddles

Optional snap-in saddles for RR-Series double-acting cylinders:

Saddle Type	Cylinder Model Number	Saddle Model Number
Flat	RR-1010, 1012	A-102F
	RR-1010, 1012	CAT-10
Tilt	RR-308, 3014	CAT-50
	RR-506, 5013	CAT-100
	RR-5020, 756	
	RR-7513	

### Standard Saddles

Saddle Type	Cylinder Model Number	Saddle Model Number
Grooved	RR-1010, 1012	A-102G
	RR-308, 3014	A-252G

For additional information on saddles:


Page: 10

# RR-Series, Double-Acting Cylinders




Cylinder retract capacity for certain RR cylinders may be less than theoretical values, as a result of reduced relief valve pressure settings:


RR-308/3014: 4000 psi  
RR-506/5013/5020: 6950 psi  
RR-756/7513: 7200 psi

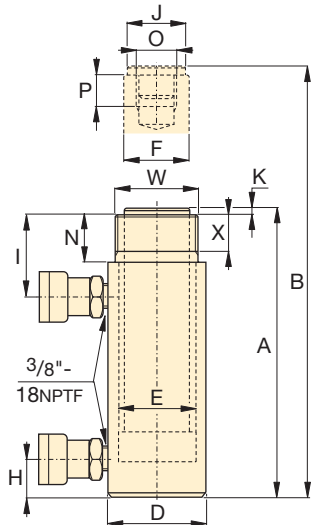

RR-1010 to RR-3014 models

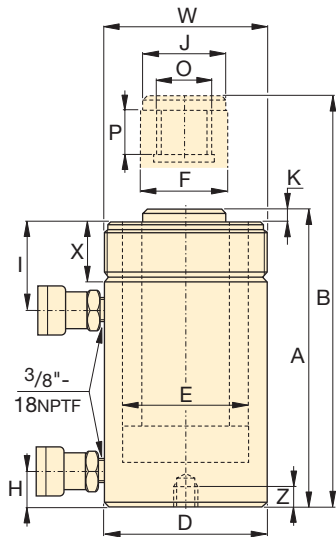

RR-506 to RR-50048 models



RR-1006 to RR-30048


No mounting holes:  
RR-506, 5013  
RR-756, 7513  
RR-1502, 15032

◀ For full features see page 32.

Cylinder Capacity (ton)	Stroke (in)	Model Number	Max. Cylinder Capacity (tons)		Cylinder Effective Area (in <sup>2</sup> )		Oil Capacity (in <sup>3</sup> )		Collap. Height	Ext. Height	Outside Diam.
			Push	Pull	Push	Pull	Push	Pull	A	B	D
									(in)	(in)	(in)
10	10.00	RR-1010*	11.1	4.0	2.23	.80	22.33	8.00	16.13	26.13	2.88
	12.00	RR-1012*	11.1	4.0	2.23	.80	26.80	9.00	18.00	30.00	2.88
30	8.25	RR-308*	32.5	6.0	6.51	3.00	53.67	25.00	15.25	23.50	4.00
	14.50	RR-3014*	32.5	6.0	6.51	3.00	92.70	43.00	21.63	36.13	4.00
50	6.13	RR-506	55.3	11.8	11.06	3.40	67.77	21.00	13.06	19.19	5.00
	13.13	RR-5013	55.3	11.8	11.06	3.40	145.17	44.00	20.06	33.19	5.00
	20.13	RR-5020	55.3	11.8	11.06	3.40	222.56	68.00	28.88	49.00	5.00
75	6.13	RR-756	79.6	17.6	15.92	4.90	97.58	29.00	13.69	19.81	5.75
	13.13	RR-7513	79.6	17.6	15.92	4.90	209.00	64.00	20.69	33.81	5.75
100	6.63	RR-1006	103.2	48.0	20.65	9.60	136.93	63.00	14.06	20.69	7.00
	13.13	RR-10013	103.2	48.0	20.65	9.60	271.17	126.00	20.63	33.75	7.00
	18.13	RR-10018	103.2	48.0	20.65	9.60	374.44	174.00	27.06	45.19	7.00
150	2.25	RR-1502	153.5	30.0	30.71	14.80	69.11	33.00	7.19	9.44	8.00
	6.13	RR-1506	153.5	74.0	30.71	14.80	188.28	91.00	15.19	21.31	8.00
	13.13	RR-15013	153.5	74.0	30.71	14.80	403.27	194.00	22.20	35.31	8.00
	32.13	RR-15032	153.5	74.0	30.71	14.80	986.84	475.00	43.94	76.06	8.00
200	6.00	RR-2006	221.0	112.5	44.21	22.50	265.28	135.00	16.94	22.94	9.75
	13.00	RR-20013	221.0	112.5	44.21	22.50	574.78	293.00	23.94	36.94	9.75
	18.00	RR-20018	221.0	112.5	44.21	22.50	795.85	396.00	30.13	48.13	9.75
	24.00	RR-20024	221.0	112.5	44.21	22.50	1,061	528.00	36.13	60.13	9.75
	36.00	RR-20036	221.0	112.5	44.21	22.50	1,592	792.00	48.13	84.13	9.75
	48.00	RR-20048	221.0	112.5	44.21	22.50	2,122	1,056	60.13	108.13	9.75
300	6.00	RR-3006	354.6	190.0	70.93	38.00	425.56	228.00	19.13	25.13	12.25
	12.00	RR-30012	354.6	190.0	70.93	38.00	851.12	456.00	25.13	37.13	12.25
	18.00	RR-30018	354.6	190.0	70.93	38.00	1,277	684.00	31.13	49.13	12.25
	24.00	RR-30024	354.6	190.0	70.93	38.00	1,702	912.00	37.13	61.13	12.25
	36.00	RR-30036	354.6	190.0	70.93	38.00	2,553	1368	49.13	85.13	12.25
	48.00	RR-30048	354.6	190.0	70.93	38.00	3,405	1824	61.13	109.13	12.25
400	6.00	RR-4006	475.4	255.0	95.09	51.00	570.51	306.00	21.19	27.19	14.13
	12.00	RR-40012	475.4	255.0	95.09	51.00	1,141	612.00	27.19	39.19	14.13
	18.00	RR-40018	475.4	255.0	95.09	51.00	1,712	918.00	33.19	51.19	14.13
	24.00	RR-40024	475.4	255.0	95.09	51.00	2,282	1224	39.19	63.19	14.13
	36.00	RR-40036	475.4	255.0	95.09	51.00	3,423	1836	51.19	87.19	14.13
	48.00	RR-40048	475.4	255.0	95.09	51.00	4,564	2448	63.19	111.19	14.13
500	6.00	RR-5006	565.7	315.0	113.15	63.00	678.92	378.00	22.75	28.75	15.63
	12.00	RR-50012	565.7	315.0	113.15	63.00	1,358	756.00	28.75	40.75	15.63
	18.00	RR-50018	565.7	315.0	113.15	63.00	2,037	1134	34.75	52.75	15.63
	24.00	RR-50024	565.7	315.0	113.15	63.00	2,716	1512	40.75	64.75	15.63
	36.00	RR-50036	565.7	315.0	113.15	63.00	4,074	2268	52.75	88.75	15.63
	48.00	RR-50048	565.7	315.0	113.15	63.00	5,431	3024	64.75	112.75	15.63

\* For RR-1010 and RR-1012: N = 1.26 inch; for RR-308 and RR-3014: N = 2.20 inch.

# Double-Acting Long Stroke Cylinders



## Couplers Included!

CR-400 couplers included on all models. Fits all HC-Series hoses.

Capacity:  
**10-500 tons**

Stroke:  
**2.25-48.00 inches**

Maximum Operating Pressure:  
**10,000 psi**

**RR Series**



Cylinder Bore Diameter	Plunger Diameter	Base to Adv. Port	Top to Return Port	Saddle Diameter	Saddle Protrusion from Plngr.	Plunger Internal Thread	Plunger Thread Length	Base Mounting Holes			Collar Thread	Collar Thread Length	Weight (lbs)	Model Number
								Bolt Cir. Diam.	Thread	Thread Depth				
E (in)	F (in)	H (in)	I (in)	J (in)	K (in)	O (in)	P (in)	U (in)	V (in)	Z (in)	W (in)	X (in)		
1.69	1.38	1.44	2.25	1.38	.24	1-8	1.00	-	-	-	2 1/4-14	1.06	28	RR-1010*
1.69	1.38	1.44	2.25	1.38	.24	1-8	1.00	-	-	-	2 1/4-14	1.06	31	RR-1012*
2.88	2.13	1.44	3.19	2.00	.41	1 1/2-16	1.00	-	-	-	3 5/16-12	1.94	40	RR-308*
2.88	2.13	1.56	3.19	2.00	.41	1 1/2-16	1.00	-	-	-	3 5/16-12	1.94	64	RR-3014*
3.75	3.13	1.13	3.00	2.81	.11	1-12	1.00	-	-	-	5-12	2.00	67	RR-506
3.75	3.13	1.13	3.00	2.81	.11	1-12	1.00	-	-	-	5-12	2.00	115	RR-5013
3.75	3.13	2.25	3.00	2.81	.11	1-12	1.00	3.00	-	-	5-12	2.00	150	RR-5020
4.50	3.75	1.19	3.00	2.81	.25	1-12	1.50	-	-	-	5 3/4-12	1.50	92	RR-756
4.50	3.75	1.19	3.19	2.81	.25	1-12	1.50	-	-	-	5 3/4-12	1.50	150	RR-7513
5.13	3.75	1.50	2.81	3.00	.13	1 3/4-12	1.38	5.50	3/4-10	1.00	6 7/8-12	2.00	135	RR-1006
5.13	3.75	1.50	2.81	3.00	.13	1 3/4-12	1.38	5.50	3/4-10	1.00	6 7/8-12	2.00	205	RR-10013
5.13	3.75	1.63	3.63	3.00	.13	1 3/4-12	1.38	5.50	3/4-10	1.00	6 7/8-12	2.00	260	RR-10018
6.25	4.50	.88	2.63	3.67	.06	-	-	-	-	-	-	-	110	RR-1502
6.25	4.50	1.94	3.31	4.49	.75	3 3/8-16	1.38	6.25	3/4-16	1.00	8-12	2.36	205	RR-1506
6.25	4.50	1.94	3.31	4.49	.75	3 3/8-16	1.38	6.25	3/4-16	1.00	8-12	2.36	275	RR-15013
6.25	4.50	3.31	3.31	4.49	.75	3 3/8-16	1.38	-	-	-	8-12	2.36	525	RR-15032
7.50	5.25	2.25	3.81	5.25	.88	-	-	5.00	1-8	1.00	-	-	325	RR-2006
7.50	5.25	2.25	3.81	5.25	.88	2 1/2-12	2.50	5.00	1-8	1.00	9 3/4-12	2.13	440	RR-20013
7.50	5.25	3.38	4.00	5.25	.88	2 1/2-12	2.50	5.00	1-8	1.00	9 3/4-12	2.13	450	RR-20018
7.50	5.25	3.38	4.00	5.25	.88	2 1/2-12	2.50	5.00	1-8	1.00	9 3/4-12	2.13	616	RR-20024
7.50	5.25	3.38	4.00	5.25	.88	2 1/2-12	2.50	5.00	1-8	1.00	9 3/4-12	2.13	845	RR-20036
7.50	5.25	3.38	4.00	5.25	.88	2 1/2-12	2.50	5.00	1-8	1.00	9 3/4-12	2.13	1065	RR-20048
9.50	6.50	3.50	4.50	6.50	1.13	2 1/2-12	3.25	6.25	1 1/4-7	1.75	12 1/4-12	2.31	441	RR-3006
9.50	6.50	3.50	4.50	6.50	1.13	2 1/2-12	3.25	6.25	1 1/4-7	1.75	12 1/4-12	2.31	608	RR-30012
9.50	6.50	3.50	4.50	6.50	1.13	2 1/2-12	3.25	6.25	1 1/4-7	1.75	12 1/4-12	2.31	776	RR-30018
9.50	6.50	3.50	4.50	6.50	1.13	2 1/2-12	3.25	6.25	1 1/4-7	1.75	12 1/4-12	2.31	1034	RR-30024
9.50	6.50	3.50	4.50	6.50	1.13	2 1/2-12	3.25	6.25	1 1/4-7	1.75	12 1/4-12	2.31	1385	RR-30036
9.50	6.50	3.50	4.50	6.50	1.13	2 1/2-12	3.25	6.25	1 1/4-7	1.75	12 1/4-12	2.31	1720	RR-30048
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1 1/2-6	2.00	14 1/8-8	2.56	670	RR-4006
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1 1/2-6	2.00	14 1/8-8	2.56	880	RR-40012
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1 1/2-6	2.00	14 1/8-8	2.56	1000	RR-40018
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1 1/2-6	2.00	14 1/8-8	2.56	1317	RR-40024
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1 1/2-6	2.00	14 1/8-8	2.56	1746	RR-40036
11.00	7.50	4.25	5.25	7.50	1.13	3-12	3.75	8.00	1 1/2-6	2.00	14 1/8-8	2.56	2162	RR-40048
12.00	8.00	4.75	6.00	8.00	1.13	3 1/4-12	4.25	8.00	1 3/4-5	2.12	15 5/8-8	3.13	953	RR-5006
12.00	8.00	4.75	6.00	8.00	1.13	3 1/4-12	4.25	8.00	1 3/4-5	2.12	15 5/8-8	3.13	1300	RR-50012
12.00	8.00	4.75	6.00	8.00	1.13	3 1/4-12	4.25	8.00	1 3/4-5	2.12	15 5/8-8	3.13	1500	RR-50018
12.00	8.00	4.75	6.00	8.00	1.13	3 1/4-12	4.25	8.00	1 3/4-5	2.12	15 5/8-8	3.13	1800	RR-50024
12.00	8.00	4.75	6.00	8.00	1.13	3 1/4-12	4.25	8.00	1 3/4-5	2.12	15 5/8-8	3.13	2210	RR-50036
12.00	8.00	4.75	6.00	8.00	1.13	3 1/4-12	4.25	8.00	1 3/4-5	2.12	15 5/8-8	3.13	2700	RR-50048

▼ Shown from left to right: CLSG-1506, CLSG-2006, CLSG-506



- Integral stop ring provides piston blow-out protection
- Baked enamel outside finish and plated pistons provide superior corrosion protection
- Base mounting holes standard on all models
- Plunger wiper reduces contamination, extending cylinder life
- Single-acting load return

▼ Eight CLSG-2506 cylinders equipped with tilting saddles lifted the planking of the bridge as the pier heads were being rebuilt.



## The Single-Acting Heavy Lifting Solution with Integral Stop Ring



### Saddles

All CLSG-Series cylinders are equipped with bolt-on removable grooved saddles. For information on optional tilt saddles, see selection chart.

Page: 39



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 117



### Optimum Performance

Enerpac's range of Z-Class electric pumps, fitted with manual or solenoid operated 3-way valves, offer optimum combinations with CLSG cylinders.

Page: 80



### Low Height - High Tonnage

When low height with high force is required, CLP-Series Pancake Cylinders with lock nut offer the solution to lift the first few inches.

Page: 20

# Single-Acting, High Tonnage Cylinders

## ▼ QUICK SELECTION CHART

For complete technical information see next page.

Cylinder Capacity (ton) [maximum]	Stroke (in)	Model Number	Cylinder Effective Area (in <sup>2</sup> )	Oil Capacity (in <sup>3</sup> )	Collapsed Height (in)	Weight (lbs)
50 [59.1]	1.97	CLSG-502	11.81	23.25	6.38	37
	3.94	CLSG-504	11.81	46.50	8.35	44
	5.91	CLSG-506	11.81	69.75	10.31	51
	7.87	CLSG-508	11.81	93.00	12.28	60
	9.84	CLSG-5010	11.81	116.25	14.25	68
	11.81	CLSG-5012	11.81	139.50	16.22	75
100 [102.9]	1.97	CLSG-1002	20.57	40.50	7.16	42
	3.94	CLSG-1004	20.57	81.00	9.13	64
	5.91	CLSG-1006	20.57	121.50	11.09	88
	7.87	CLSG-1008	20.57	162.00	13.06	110
	9.84	CLSG-10010	20.57	202.50	15.03	134
	11.81	CLSG-10012	20.57	242.99	17.00	157
150 [153.9]	1.97	CLSG-1502	30.78	60.58	7.72	86
	3.94	CLSG-1504	30.78	121.17	9.69	115
	5.91	CLSG-1506	30.78	181.75	11.65	143
	7.87	CLSG-1508	30.78	242.33	13.62	172
	9.84	CLSG-15010	30.78	302.92	15.59	203
	11.81	CLSG-15012	30.78	363.50	17.56	231
200 [206.1]	1.97	CLSG-2002	41.22	81.13	8.50	121
	5.91	CLSG-2006	41.22	243.40	12.44	201
	11.81	CLSG-20012	41.22	486.79	18.35	322
250 [284.0]	1.97	CLSG-2502	56.80	111.81	9.25	196
	5.91	CLSG-2506	56.80	335.42	13.19	300
	11.81	CLSG-25012	56.80	670.84	19.09	456
300 [353.6]	1.97	CLSG-3002	70.71	139.19	12.28	406
	5.91	CLSG-3006	70.71	417.56	16.22	511
	11.81	CLSG-30012	70.71	835.11	22.13	668
400 [433.9]	1.97	CLSG-4002	86.78	170.84	14.74	595
	5.91	CLSG-4006	86.78	512.51	18.68	728
	11.81	CLSG-40012	86.78	1025.02	24.59	928
500 [566.3]	1.97	CLSG-5002	113.25	222.92	16.50	884
	5.91	CLSG-5006	113.25	668.77	20.43	1058
	11.81	CLSG-50012	113.25	1337.55	26.34	1321
600 [662.9]	1.97	CLSG-6002	132.57	260.97	16.89	1045
	5.91	CLSG-6006	132.57	782.90	20.83	1246
	11.81	CLSG-60012	132.57	1565.81	26.73	1545
800 [911.6]	1.97	CLSG-8002	182.32	358.91	18.66	1634
	5.91	CLSG-8006	182.32	10776.72	22.60	1941
	11.81	CLSG-80012	182.32	2153.44	28.50	2332
1000 [1136]	1.97	CLSG-10002	227.19	447.23	22.20	2341
	5.91	CLSG-10006	227.19	1341.68	26.14	2674
	11.81	CLSG-100012	227.19	2683.35	32.05	3172

## CLSG Series



Capacity:

**50-1,000 tons**

Stroke:

**1.97-11.81 inches**

Maximum Operating Pressure:

**10,000 psi**



### Standard Features

- Interchangeable, hardened grooved saddles
- CR-400 Coupler and dust cap
- Top and side mount lifting eye capability
- All cylinders meet ASME B-30.1 and ISO 10100 Standards



### Additional Stroke Lengths

Models above 150 tons are also available with standard stroke lengths of 4, 8 and 10 inches. Please contact Enerpac for ordering information and dimensional details.




### Lifting an Unbalanced Load

When lifting an unbalanced load **Enerpac Synchronous Lift Systems** can be the solution with multiple lift point capabilities from 4 to 64 points. See our "Yellow Pages" for multi-cylinder set-ups.




### Mounting Hole Orientation

Top mounting hole orientation is maintained to port location. Base mounting hole orientation is not maintained to port location.

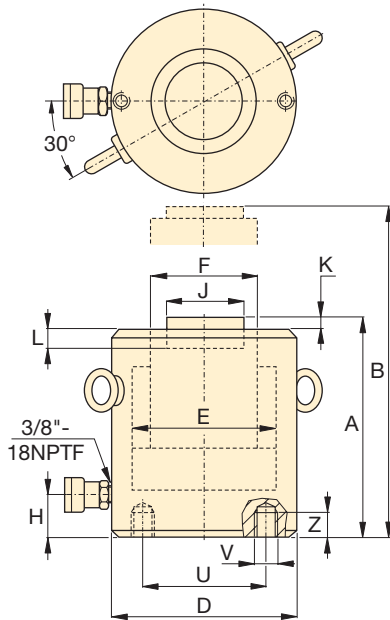

CLSG-50 to CLSG-150 models

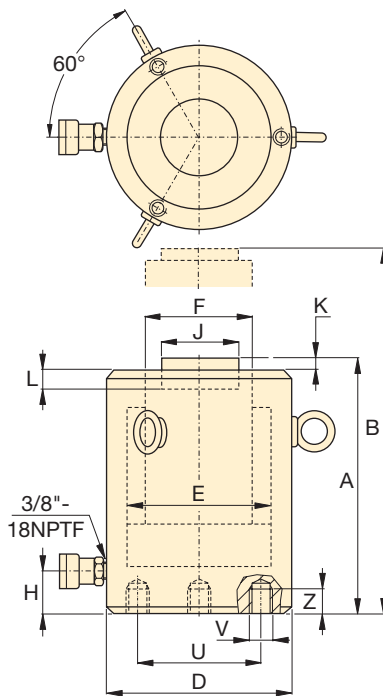

CLSG-200 to CLSG-1000 models


◀ For full features see page 36.

Cylinder Capacity (ton) [maximum]	Stroke (in)	Model Number	Cylinder Effective Area (in <sup>2</sup> )	Oil Capacity (in <sup>3</sup> )	Collapsed Height	Extended Height	Outside Diam.
					A (in)	B (in)	D (in)
50 [59.1]	1.97	CLSG-502	11.81	23.25	6.38	8.35	5.12
	3.94	CLSG-504	11.81	46.50	8.35	12.28	5.12
	5.91	CLSG-506	11.81	69.75	10.31	16.22	5.12
	7.87	CLSG-508	11.81	93.00	12.28	20.16	5.12
	9.84	CLSG-5010	11.81	116.25	14.25	24.09	5.12
	11.81	CLSG-5012	11.81	139.50	16.22	28.03	5.12
100 [102.9]	1.97	CLSG-1002	20.57	40.50	7.16	9.13	6.50
	3.94	CLSG-1004	20.57	81.00	9.13	13.06	6.50
	5.91	CLSG-1006	20.57	121.50	11.09	17.00	6.50
	7.87	CLSG-1008	20.57	162.00	13.06	20.94	6.50
	9.84	CLSG-10010	20.57	202.50	15.03	24.87	6.50
	11.81	CLSG-10012	20.57	242.99	17.00	28.81	6.50
150 [153.9]	1.97	CLSG-1502	30.78	60.58	7.72	9.69	8.07
	3.94	CLSG-1504	30.78	121.17	9.69	13.62	8.07
	5.91	CLSG-1506	30.78	181.75	11.65	17.56	8.07
	7.87	CLSG-1508	30.78	242.33	13.62	21.50	8.07
	9.84	CLSG-15010	30.78	302.92	15.59	25.43	8.07
	11.81	CLSG-15012	30.78	363.50	17.56	29.37	8.07
200 [206.1]	1.97	CLSG-2002	41.22	81.13	8.50	10.47	9.25
	5.91	CLSG-2006	41.22	243.40	12.44	18.35	9.25
	11.81	CLSG-20012	41.22	486.79	18.35	30.16	9.25
250 [284.0]	1.97	CLSG-2502	56.80	111.81	9.25	11.22	10.83
	5.91	CLSG-2506	56.80	335.42	13.19	19.09	10.83
	11.81	CLSG-25012	56.80	670.84	19.09	30.91	10.83
300 [353.6]	1.97	CLSG-3002	70.71	139.19	12.28	14.25	12.20
	5.91	CLSG-3006	70.71	417.56	16.22	22.13	12.20
	11.81	CLSG-30012	70.71	835.11	22.13	33.94	12.20
400 [433.9]	1.97	CLSG-4002	86.78	170.84	14.74	16.71	13.78
	5.91	CLSG-4006	86.78	512.51	18.68	24.59	13.78
	11.81	CLSG-40012	86.78	1025.02	24.59	36.40	13.78
500 [566.3]	1.97	CLSG-5002	113.25	222.92	16.50	18.46	15.75
	5.91	CLSG-5006	113.25	668.77	20.43	26.34	15.75
	11.81	CLSG-50012	113.25	1337.55	26.34	38.15	15.75
600 [662.9]	1.97	CLSG-6002	132.57	260.97	16.89	18.86	16.93
	5.91	CLSG-6006	132.57	782.90	20.83	26.73	16.93
	11.81	CLSG-60012	132.57	1565.81	26.73	38.54	16.93
800 [911.6]	1.97	CLSG-8002	182.32	358.91	18.66	20.63	19.88
	5.91	CLSG-8006	182.32	1076.72	22.60	28.50	19.88
	11.81	CLSG-80012	182.32	2153.44	28.50	40.31	19.88
1000 [1136]	1.97	CLSG-10002	227.19	447.23	22.20	24.17	22.05
	5.91	CLSG-10006	227.19	1341.68	26.14	32.05	22.05
	11.81	CLSG-100012	227.19	2683.35	32.05	43.86	22.05



# Single-Acting, High Tonnage Cylinders

## Optional Tilt Saddle \*



Capacity:  
**50-1,000 tons**

Stroke:  
**1.97-11.81 inches**

Maximum Operating Pressure:  
**10,000 psi**

**CLSG**  
Series



Cylinder Bore Diam.	Plunger Diam.	Base to Advance Port	Standard Saddle Diam.	Saddle Protrusion from Plngr.	Depth of Plunger Hole	Base Mounting Holes			Weight (lbs)	Model Number	* Optional Tilt Saddle		
						Bolt Cir. Diam.	Thread	Thread Depth			Diam.	Height	Model Number
E (in)	F (in)	H (in)	J (in)	K (in)	L (in)	U (in)	V (mm)	Z (in)		J1 (in)	K1 (in)		
3.88	2.76	2.05	1.97	.04	.75	2.56	M12	.87	37	CLSG-502	1.95	.94	CATG-50
3.88	2.76	2.05	1.97	.04	.75	2.56	M12	.87	44	CLSG-504	1.95	.94	CATG-50
3.88	2.76	2.05	1.97	.04	.75	2.56	M12	.87	51	CLSG-506	1.95	.94	CATG-50
3.88	2.76	2.05	1.97	.04	.75	2.56	M12	.87	60	CLSG-508	1.95	.94	CATG-50
3.88	2.76	2.05	1.97	.04	.75	2.56	M12	.87	68	CLSG-5010	1.95	.94	CATG-50
3.88	2.76	2.05	1.97	.04	.75	2.56	M12	.87	75	CLSG-5012	1.95	.94	CATG-50
5.12	3.74	2.13	2.95	.04	.75	3.74	M12	.87	42	CLSG-1002	2.86	1.14	CATG-100
5.12	3.74	2.13	2.95	.04	.75	3.74	M12	.87	64	CLSG-1004	2.86	1.14	CATG-100
5.12	3.74	2.13	2.95	.04	.75	3.74	M12	.87	88	CLSG-1006	2.86	1.14	CATG-100
5.12	3.74	2.13	2.95	.04	.75	3.74	M12	.87	110	CLSG-1008	2.86	1.14	CATG-100
5.12	3.74	2.13	2.95	.04	.75	3.74	M12	.87	134	CLSG-10010	2.86	1.14	CATG-100
5.12	3.74	2.13	2.95	.04	.75	3.74	M12	.87	157	CLSG-10012	2.86	1.14	CATG-100
6.26	4.49	2.40	3.70	.04	.75	5.12	M12	.87	86	CLSG-1502	3.56	1.21	CATG-150
6.26	4.49	2.40	3.70	.04	.75	5.12	M12	.87	115	CLSG-1504	3.56	1.21	CATG-150
6.26	4.49	2.40	3.70	.04	.75	5.12	M12	.87	143	CLSG-1506	3.56	1.21	CATG-150
6.26	4.49	2.40	3.70	.04	.75	5.12	M12	.87	172	CLSG-1508	3.56	1.21	CATG-150
6.26	4.49	2.40	3.70	.04	.75	5.12	M12	.87	203	CLSG-15010	3.56	1.21	CATG-150
6.26	4.49	2.40	3.70	.04	.75	5.12	M12	.87	231	CLSG-15012	3.56	1.21	CATG-150
7.24	5.24	2.62	4.45	.04	.94	6.50	M12	.87	121	CLSG-2002	4.64	1.37	CATG-200
7.24	5.24	2.62	4.45	.04	.94	6.50	M12	.87	201	CLSG-2006	4.64	1.37	CATG-200
7.24	5.24	2.62	4.45	.04	.94	6.50	M12	.87	322	CLSG-20012	4.64	1.37	CATG-200
8.50	6.50	2.87	5.71	.04	.94	7.48	M12	.87	196	CLSG-2502	5.60	1.81	CATG-250
8.50	6.50	2.87	5.71	.04	.94	7.48	M12	.87	300	CLSG-2506	5.60	1.81	CATG-250
8.50	6.50	2.87	5.71	.04	.94	7.48	M12	.87	456	CLSG-25012	5.60	1.81	CATG-250
9.49	7.76	3.98	6.97	.04	.75	7.09	M16	1.42	406	CLSG-3002	6.30	2.42	CATG-300
9.49	7.76	3.98	6.97	.04	.75	7.09	M16	1.42	511	CLSG-3006	6.30	2.42	CATG-300
9.49	7.76	3.98	6.97	.04	.75	7.09	M16	1.42	668	CLSG-30012	6.30	2.42	CATG-300
10.51	8.50	4.49	7.72	.12	1.06	8.07	M16	1.42	595	CLSG-4002	7.59	2.00	CATG-400
10.51	8.50	4.49	7.72	.12	1.06	8.07	M16	1.42	728	CLSG-4006	7.59	2.00	CATG-400
10.51	8.50	4.49	7.72	.12	1.06	8.07	M16	1.42	928	CLSG-40012	7.59	2.00	CATG-400
12.01	9.76	4.49	8.98	.12	1.06	9.84	M24	1.50	884	CLSG-5002	8.98	2.48	CATG-500
12.01	9.76	4.49	8.98	.12	1.06	9.84	M24	1.50	1058	CLSG-5006	8.98	2.48	CATG-500
12.01	9.76	4.49	8.98	.12	1.06	9.84	M24	1.50	1321	CLSG-50012	8.98	2.48	CATG-500
12.99	10.51	4.49	9.72	.12	1.06	10.83	M24	1.50	1045	CLSG-6002	9.47	2.99	CATG-600
12.99	10.51	4.49	9.72	.12	1.06	10.83	M24	1.50	1246	CLSG-6006	9.47	2.99	CATG-600
12.99	10.51	4.49	9.72	.12	1.06	10.83	M24	1.50	1545	CLSG-60012	9.47	2.99	CATG-600
15.24	12.48	5.87	11.69	.12	1.06	12.99	M24	1.50	1634	CLSG-8002	11.28	2.94	CATG-800
15.24	12.48	5.87	11.69	.12	1.06	12.99	M24	1.50	1914	CLSG-8006	11.28	2.94	CATG-800
15.24	12.48	5.87	11.69	.12	1.06	12.99	M24	1.50	2332	CLSG-80012	11.28	2.94	CATG-800
17.01	13.50	6.85	12.72	.12	1.06	14.76	M24	1.50	2341	CLSG-10002	12.35	3.65	CATG-1000
17.01	13.50	6.85	12.72	.12	1.06	14.76	M24	1.50	2674	CLSG-10006	12.35	3.65	CATG-1000
17.01	13.50	6.85	12.72	.12	1.06	14.76	M24	1.50	3172	CLSG-100012	12.35	3.65	CATG-1000

▼ Shown from left to right: CLRG-506, CLRG-2006, CLRG-1506



## Double-Acting Power Lifters



### Saddles

All CLRG cylinders are equipped with bolt-on removable grooved saddles. For information on optional tilt saddles, see selection chart.

Page: 43



### Safety Device

A pilot-operated check valve (**V-42**) can be inserted between cylinder ports.

This valve provides a safety lock on the cylinder under load at any position and remote control for unlocking.

Page: 132



### Optimum Performance

Enerpac's range of Z-Class electric pumps, fitted with manual or solenoid operated 4-way valves, offer optimum combinations with CLRG cylinders.

Page: 80

- Integral stop ring provides piston blow-out protection
- Double-acting for positive retraction
- Baked enamel outside finish and plated pistons provide superior corrosion resistance
- Safety valve in retract side of cylinder helps to prevent damage in case of accidental over-pressurization
- Interchangeable, hardened grooved saddles are standard
- Plunger wiper reduces contamination, extending cylinder life

▼ CLRG-Series cylinders supported and positioned these automobile deck elements.



▼ Replacing adjustment rolls under a fly-over with CLRG cylinders, for controlled lifting and lowering.



# Double-Acting, High Tonnage Cylinders

## ▼ QUICK SELECTION CHART

For complete technical information see next page.

Cylinder Capacity (ton)	Stroke (in)	Model Number	Cylinder Effective Area (in <sup>2</sup> )		Oil Capacity (in <sup>3</sup> )		Collapsed Height (in)
			Push	Pull	Push	Pull	
50	1.97	CLRG-502	11.81	5.85	23.25	11.51	6.38
	3.94	CLRG-504	11.81	5.85	46.50	23.02	8.35
	5.91	CLRG-506	11.81	5.85	69.75	34.52	10.31
	7.87	CLRG-508	11.81	5.85	93.00	46.03	12.28
	9.84	CLRG-5010	11.81	5.85	116.25	57.54	14.25
	11.81	CLRG-5012	11.81	5.85	139.50	69.05	16.22
100	1.97	CLRG-1002	20.57	9.59	40.50	18.87	7.16
	3.94	CLRG-1004	20.57	9.59	81.00	37.74	9.13
	5.91	CLRG-1006	20.57	9.59	121.50	56.61	11.09
	7.87	CLRG-1008	20.57	9.59	162.00	75.49	13.06
	9.84	CLRG-10010	20.57	9.59	202.50	94.36	15.03
	11.81	CLRG-10012	20.57	9.59	242.99	113.23	17.00
150	1.97	CLRG-1502	30.78	14.96	60.58	29.44	7.72
	3.94	CLRG-1504	30.78	14.96	121.17	58.88	9.69
	5.91	CLRG-1506	30.78	14.96	181.75	88.32	11.65
	7.87	CLRG-1508	30.78	14.96	242.33	117.76	13.62
	9.84	CLRG-15010	30.78	14.96	302.92	147.20	15.59
	11.81	CLRG-15012	30.78	14.96	363.50	176.64	17.56
200	1.97	CLRG-2002	41.22	19.68	81.13	38.74	8.50
	5.91	CLRG-2006	41.22	19.68	243.40	116.23	12.44
	11.81	CLRG-20012	41.22	19.68	486.79	232.46	18.35
250	1.97	CLRG-2502	56.80	23.65	111.81	46.56	9.25
	5.91	CLRG-2506	56.80	23.65	335.42	139.69	13.19
	11.81	CLRG-25012	56.80	23.65	670.84	279.39	19.09
300	1.97	CLRG-3002	70.71	23.46	139.19	46.18	12.28
	5.91	CLRG-3006	70.71	23.46	417.56	138.55	16.22
	11.81	CLRG-30012	70.71	23.46	835.11	277.10	22.13
400	1.97	CLRG-4002	86.79	29.99	170.84	59.03	14.74
	5.91	CLRG-4006	86.79	29.99	512.51	177.09	18.68
	11.81	CLRG-40012	86.79	29.99	1,025	354.18	24.59
500	1.97	CLRG-5002	113.25	38.37	222.92	75.54	16.50
	5.91	CLRG-5006	113.25	38.37	668.77	226.61	20.43
	11.81	CLRG-50012	113.25	38.37	1,338	453.22	26.34
600	1.97	CLRG-6002	132.57	45.79	260.97	90.13	16.89
	5.91	CLRG-6006	132.57	45.79	782.90	270.39	20.83
	11.81	CLRG-60012	132.57	45.79	1,566	540.79	26.73
800	1.97	CLRG-8002	182.32	59.99	358.91	118.09	18.66
	5.91	CLRG-8006	182.32	59.99	1,077	354.28	22.60
	11.81	CLRG-80012	182.32	59.99	2,153	708.57	28.50
1000	1.97	CLRG-10002	227.19	83.97	447.23	165.29	22.20
	5.91	CLRG-10006	227.19	83.97	1,342	495.87	26.14
	11.81	CLRG-100012	227.19	83.97	2,683	991.75	32.05

## CLRG Series



Capacity:

**50-1,000 tons**

Stroke:

**1.97-11.81 inches**

Maximum Operating Pressure:

**10,000 psi**



### Standard Features

- Interchangeable, hardened grooved saddles
- CR-400 Coupler and dust cap
- Top and side mount lifting eye capability
- All cylinders meet ASME B-30.1 and ISO 10100 Standards



### Pump Selection

A double-acting cylinder must be powered by a pump with a 4-way valve.

Page: **61**



### RR-Series


For higher cycle applications, Enerpac RR cylinders are a good alternative.

Page: **32**




### Additional Stroke Lengths

Models above 150 tons are also available with standard stroke lengths of 4, 8 and 10 inches. Please contact Enerpac for ordering information.

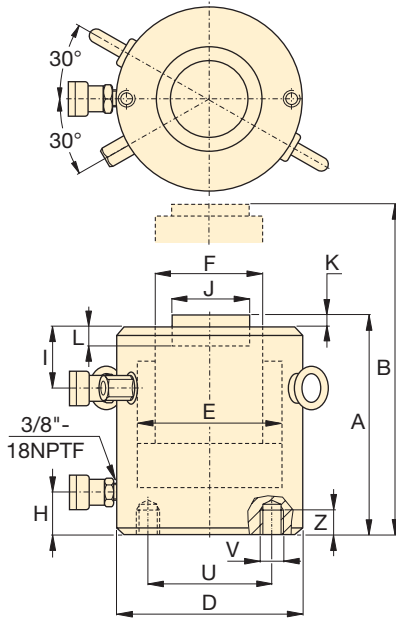

CLRG-50 to CLRG-150 models

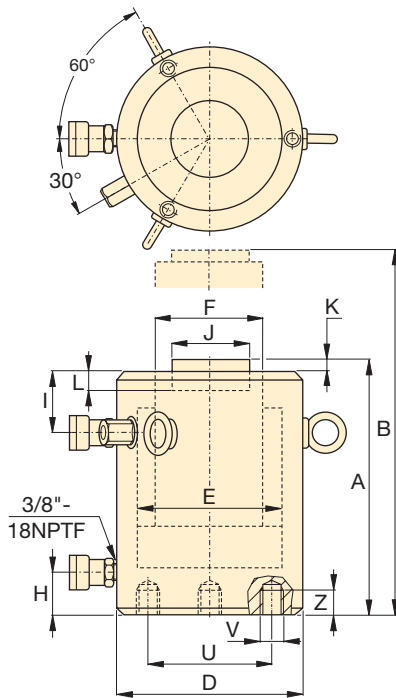

CLRG-200 to CLRG-1000 models



### Mounting Hole Orientation

Top mounting hole orientation is maintained to port location. Base mounting hole orientation is not maintained to port location.


◀ For full features see page 40.

Cylinder Capacity (ton)	Stroke (in)	Model Number	Maximum Cylinder Capacity (ton)		Cylinder Effective Area (in <sup>2</sup> )		Oil Capacity (in <sup>3</sup> )	
			Push	Pull	Push	Pull	Push	Pull
50	1.97	CLRG-502	59.1	29	11.81	5.85	23.25	11.51
	3.94	CLRG-504	59.1	29	11.81	5.85	46.50	23.02
	5.91	CLRG-506	59.1	29	11.81	5.85	69.75	34.52
	7.87	CLRG-508	59.1	29	11.81	5.85	93.00	46.03
	9.84	CLRG-5010	59.1	29	11.81	5.85	116.25	57.54
	11.81	CLRG-5012	59.1	29	11.81	5.85	139.50	69.05
100	1.97	CLRG-1002	102.9	48	20.57	9.59	40.50	18.87
	3.94	CLRG-1004	102.9	48	20.57	9.59	81.00	37.74
	5.91	CLRG-1006	102.9	48	20.57	9.59	121.50	56.61
	7.87	CLRG-1008	102.9	48	20.57	9.59	162.00	75.49
	9.84	CLRG-10010	102.9	48	20.57	9.59	202.50	94.36
	11.81	CLRG-10012	102.9	48	20.57	9.59	242.99	113.23
150	1.97	CLRG-1502	153.9	75	30.78	14.96	60.58	29.44
	3.94	CLRG-1504	153.9	75	30.78	14.96	121.17	58.88
	5.91	CLRG-1506	153.9	75	30.78	14.96	181.75	88.32
	7.87	CLRG-1508	153.9	75	30.78	14.96	242.33	117.76
	9.84	CLRG-15010	153.9	75	30.78	14.96	302.92	147.20
	11.81	CLRG-15012	153.9	75	30.78	14.96	363.50	176.64
200	1.97	CLRG-2002	206.1	98	41.22	19.68	81.13	38.74
	5.91	CLRG-2006	206.1	98	41.22	19.68	243.40	116.23
	11.81	CLRG-20012	206.1	98	41.22	19.68	486.79	232.46
250	1.97	CLRG-2502	284.0	118	56.80	23.65	111.81	46.56
	5.91	CLRG-2506	284.0	118	56.80	23.65	335.42	139.69
	11.81	CLRG-25012	284.0	118	56.80	23.65	670.84	279.39
300	1.97	CLRG-3002	353.6	117	70.71	23.46	139.19	46.18
	5.91	CLRG-3006	353.6	117	70.71	23.46	417.56	138.55
	11.81	CLRG-30012	353.6	117	70.71	23.46	835.11	277.10
400	1.97	CLRG-4002	433.9	150	86.79	29.99	170.84	59.03
	5.91	CLRG-4006	433.9	150	86.79	29.99	512.51	177.09
	11.81	CLRG-40012	433.9	150	86.79	29.99	1,025	354.18
500	1.97	CLRG-5002	566.3	192	113.25	38.37	222.92	75.54
	5.91	CLRG-5006	566.3	192	113.25	38.37	668.77	226.61
	11.81	CLRG-50012	566.3	192	113.25	38.37	1,338	453.22
600	1.97	CLRG-6002	662.9	229	132.57	45.79	260.97	90.13
	5.91	CLRG-6006	662.9	229	132.57	45.79	782.90	270.39
800	1.97	CLRG-8002	911.6	300	182.32	59.99	358.91	118.09
	5.91	CLRG-8006	911.6	300	182.32	59.99	1,077	354.28
1000	1.97	CLRG-10002	1136	420	227.19	83.97	447.23	165.29
	5.91	CLRG-10006	1136	420	227.19	83.97	1,342	495.87
	11.81	CLRG-100012	1136	420	227.19	83.97	2,683	991.75

Base Mounting Hole Dimensions (in)			
Model / Capacity ton	Bolt Circle U	Thread Size V (mm)	Minimum Thread Depth Z
CLRG-50	2.56	M12	.87
CLRG-100	3.74	M12	.87
CLRG-150	5.12	M12	.87
CLRG-200	6.50	M12	.87
CLRG-250	7.48	M12	.87
CLRG-300	7.09	M16	1.42
CLRG-400	8.07	M16	1.42
CLRG-500	9.84	M24	1.50
CLRG-600	10.83	M24	1.50
CLRG-800	12.99	M24	1.50
CLRG-1000	14.76	M24	1.50

# Double-Acting, High Tonnage Cylinders

## \* Optional Tilt Saddle



Capacity:  
**50-1,000 tons**

Stroke:  
**1.97-11.81 inches**

Maximum Operating Pressure:  
**10,000 psi**

**CLRG**  
Series



Collap. Height A (in)	Ext. Height B (in)	Outside Diam. D (in)	Cyl. Bore Diam. E (in)	Plunger Diam. F (in)	Base to Advance Port H (in)	Top to Retract Port I (in)	Standard Saddle Diam. J (in)	Saddle Protrusion from Plngr. K (in)	Depth of Plunger Hole L (in)	Weight (lbs)	Model Number	*Optional Tilt Saddle		
												Diam. J1 (in)	Height K1 (in)	Model Number
6.38	8.35	5.12	3.88	2.76	1.65	1.29	1.97	.04	.75	37	CLRG-502	1.95	.94	CATG-50
8.35	12.28	5.12	3.88	2.76	1.65	1.29	1.97	.04	.75	44	CLRG-504	1.95	.94	CATG-50
10.31	16.22	5.12	3.88	2.76	1.65	1.29	1.97	.04	.75	51	CLRG-506	1.95	.94	CATG-50
12.28	20.16	5.12	3.88	2.76	1.65	1.29	1.97	.04	.75	60	CLRG-508	1.95	.94	CATG-50
14.25	24.09	5.12	3.88	2.76	1.65	1.29	1.97	.04	.75	68	CLRG-5010	1.95	.94	CATG-50
16.22	28.03	5.12	3.88	2.76	1.65	1.29	1.97	.04	.75	75	CLRG-5012	1.95	.94	CATG-50
7.16	9.13	6.50	5.12	3.74	2.13	1.89	2.95	.04	.75	42	CLRG-1002	2.86	1.14	CATG-100
9.13	13.06	6.50	5.12	3.74	2.13	1.89	2.95	.04	.75	64	CLRG-1004	2.86	1.14	CATG-100
11.09	17.00	6.50	5.12	3.74	2.13	1.89	2.95	.04	.75	88	CLRG-1006	2.86	1.14	CATG-100
13.06	20.94	6.50	5.12	3.74	2.13	1.89	2.95	.04	.75	110	CLRG-1008	2.86	1.14	CATG-100
15.03	24.87	6.50	5.12	3.74	2.13	1.89	2.95	.04	.75	134	CLRG-10010	2.86	1.14	CATG-100
17.00	28.81	6.50	5.12	3.74	2.13	1.89	2.95	.04	.75	157	CLRG-10012	2.86	1.14	CATG-100
7.72	9.69	8.07	6.26	4.49	2.40	2.22	3.70	.04	.75	86	CLRG-1502	3.56	1.21	CATG-150
9.69	13.62	8.07	6.26	4.49	2.40	2.22	3.70	.04	.75	115	CLRG-1504	3.56	1.21	CATG-150
11.65	17.56	8.07	6.26	4.49	2.40	2.22	3.70	.04	.75	143	CLRG-1506	3.56	1.21	CATG-150
13.62	21.50	8.07	6.26	4.49	2.40	2.22	3.70	.04	.75	172	CLRG-1508	3.56	1.21	CATG-150
15.59	25.43	8.07	6.26	4.49	2.40	2.22	3.70	.04	.75	203	CLRG-15010	3.56	1.21	CATG-150
17.56	29.37	8.07	6.26	4.49	2.40	2.22	3.70	.04	.75	231	CLRG-15012	3.56	1.21	CATG-150
8.50	10.47	9.25	7.24	5.24	2.62	2.22	4.45	.04	.94	121	CLRG-2002	4.64	1.37	CATG-200
12.44	18.35	9.25	7.24	5.24	2.62	2.22	4.45	.04	.94	201	CLRG-2006	4.64	1.37	CATG-200
18.35	30.16	9.25	7.24	5.24	2.62	2.22	4.45	.04	.94	322	CLRG-20012	4.64	1.37	CATG-200
9.25	11.22	10.83	8.50	6.50	2.87	3.07	5.71	.04	.94	196	CLRG-2502	5.60	1.81	CATG-250
13.19	19.09	10.83	8.50	6.50	2.87	3.07	5.71	.04	.94	300	CLRG-2506	5.60	1.81	CATG-250
19.09	30.91	10.83	8.50	6.50	2.87	3.07	5.71	.04	.94	456	CLRG-25012	5.60	1.81	CATG-250
12.28	14.25	12.20	9.49	7.76	3.98	2.95	6.97	.04	.75	406	CLRG-3002	6.30	2.42	CATG-300
16.22	22.13	12.20	9.49	7.76	3.98	2.95	6.97	.04	.75	511	CLRG-3006	6.30	2.42	CATG-300
22.13	33.94	12.20	9.49	7.76	3.98	2.95	6.97	.04	.75	668	CLRG-30012	6.30	2.42	CATG-300
14.74	16.71	13.78	10.51	8.50	4.49	4.13	7.72	.12	1.06	595	CLRG-4002	7.59	2.00	CATG-400
18.68	24.59	13.78	10.51	8.50	4.49	4.13	7.72	.12	1.06	728	CLRG-4006	7.59	2.00	CATG-400
24.59	36.40	13.78	10.51	8.50	4.49	4.13	7.72	.12	1.06	928	CLRG-40012	7.59	2.00	CATG-400
16.50	18.46	15.75	12.01	9.76	4.49	5.31	8.98	.12	1.06	884	CLRG-5002	8.98	2.48	CATG-500
20.43	26.34	15.75	12.01	9.76	4.49	5.31	8.98	.12	1.06	1058	CLRG-5006	8.98	2.48	CATG-500
26.34	38.15	15.75	12.01	9.76	4.49	5.31	8.98	.12	1.06	1321	CLRG-50012	8.98	2.48	CATG-500
16.89	18.86	16.93	12.99	10.51	4.49	5.31	9.72	.12	1.06	1045	CLRG-6002	9.47	2.99	CATG-600
20.83	26.73	16.93	12.99	10.51	4.49	5.31	9.72	.12	1.06	1246	CLRG-6006	9.47	2.99	CATG-600
26.73	38.54	16.93	12.99	10.51	4.49	5.31	9.72	.12	1.06	1545	CLRG-60012	9.47	2.99	CATG-600
18.66	20.63	19.88	15.24	12.48	5.87	5.31	11.69	.12	1.06	1634	CLRG-8002	11.28	2.94	CATG-800
22.60	28.50	19.88	15.24	12.48	5.87	5.31	11.69	.12	1.06	1914	CLRG-8006	11.28	2.94	CATG-800
28.50	40.31	19.88	15.24	12.48	5.87	5.31	11.69	.12	1.06	2332	CLRG-80012	11.28	2.94	CATG-800
22.20	24.17	22.05	17.01	13.50	6.85	6.69	12.72	.12	1.06	2341	CLRG-10002	12.35	3.65	CATG-1000
26.14	32.05	22.05	17.01	13.50	6.85	6.69	12.72	.12	1.06	2674	CLRG-10006	12.35	3.65	CATG-1000
32.05	43.86	22.05	17.01	13.50	6.85	6.69	12.72	.12	1.06	3172	CLRG-100012	12.35	3.65	CATG-1000

▼ Shown from left to right: CLL-1006, CLL-2506, CLL-1506, CLL-506



- Safety Lock Nut for mechanical load holding
- Baked enamel outside finish and plated pistons provide superior corrosion resistance
- Overflow port functions as a stroke limiter
- Interchangeable, hardened grooved saddles are standard
- CR-400 coupler and dust cap included on all models
- Single-acting load return

▼ For this curved bridge, CLL-Series cylinders were used to support the concrete beams to level the pierhead and to place 4000 ton slide bearings between pier and pierhead.



## To Secure Loads Mechanically



### Saddles

All CLL cylinders are equipped with bolt-on removable grooved saddles. For information on optional tilt saddles, see the selection chart.

Page: 47



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 117



### Low Height - High Tonnage

When low height with high force is required, pancake cylinders with lock nut offer the solution to lift the first few inches.

Page: 20

▼ CLL cylinder, mechanically locked, after positioning the curved bridge.




# Single-Acting, Lock Nut Cylinders

## ▼ QUICK SELECTION CHART

For complete technical information see next page.

Cylinder Capacity (ton) [maximum]	Stroke (in)	Model Number	Cylinder Effective Area (in <sup>2</sup> )	Oil Capacity (in <sup>3</sup> )	Collapsed Height (in)	Weight (lbs)
50 [59.1]	1.97	CLL-502	10.99	21.63	6.46	35
	3.94	CLL-504	10.99	43.25	8.43	46
	5.91	CLL-506	10.99	64.88	10.39	57
	7.87	CLL-508	10.99	86.51	12.36	68
	9.84	CLL-5010	10.99	108.14	14.33	79
	11.81	CLL-5012	10.99	129.76	16.30	90
100 [102.9]	1.97	CLL-1002	20.57	40.50	7.36	68
	3.94	CLL-1004	20.57	81.00	9.33	87
	5.91	CLL-1006	20.57	121.50	11.30	106
	7.87	CLL-1008	20.57	162.00	13.27	125
	9.84	CLL-10010	20.57	202.50	15.24	143
	11.81	CLL-10012	20.57	242.99	17.20	162
150 [153.9]	1.97	CLL-1502	30.78	60.58	8.23	117
	3.94	CLL-1504	30.78	121.17	10.20	146
	5.91	CLL-1506	30.78	181.75	12.17	174
	7.87	CLL-1508	30.78	242.33	14.13	203
	9.84	CLL-15010	30.78	302.92	16.10	231
	11.81	CLL-15012	30.78	363.50	18.07	260
200 [206.1]	1.97	CLL-2002	41.17	81.04	9.57	183
	5.91	CLL-2006	41.17	243.13	13.50	260
	11.81	CLL-20012	41.17	486.27	19.41	376
250 [284.0]	1.97	CLL-2502	56.75	111.70	9.80	256
	5.91	CLL-2506	56.75	335.11	13.74	359
	11.81	CLL-25012	56.75	670.22	19.65	515
300 [353.6]	1.97	CLL-3002	70.71	139.19	11.61	382
	5.91	CLL-3006	70.71	417.56	15.55	514
	11.81	CLL-30012	70.71	835.11	21.46	712
400 [433.9]	1.97	CLL-4002	86.79	170.84	13.19	553
	5.91	CLL-4006	86.79	512.51	17.13	721
	11.81	CLL-40012	86.79	1025.02	23.03	972
500 [566.3]	1.97	CLL-5002	113.25	222.99	14.76	809
	5.91	CLL-5006	113.25	668.77	18.70	1029
	11.81	CLL-50012	113.25	1337.55	24.61	1360
600 [662.9]	1.97	CLL-6002	132.57	260.97	15.55	985
	5.91	CLL-6006	132.57	782.90	19.49	1241
	11.81	CLL-60012	132.57	1565.81	25.39	1625
800 [911.6]	1.97	CLL-8002	182.42	359.09	17.91	1565
	5.91	CLL-8006	182.42	1077.27	21.85	1918
	11.81	CLL-80012	182.42	2154.55	27.76	2446
1000 [1136]	1.97	CLL-10002	227.30	447.43	19.49	2094
	5.91	CLL-10006	227.30	1342.30	23.43	2517
	11.81	CLL-100012	227.30	2684.59	29.33	3151

## CLL Series



Capacity:

**50-1,000 tons**

Stroke:

**1.97-11.81 inches**

Maximum Operating Pressure:

**10,000 psi**



### Additional Stroke Lengths

Models above 150 tons are also available with standard stroke lengths of 4, 8 and 10 inches. Please contact

Enerpac for ordering information and dimensional details.



### Lifting an Unbalanced Load?

See our "Yellow Pages" for multi-cylinder set ups.

Page: **244**





### Speed Chart



See the Enerpac Cylinder Speed Chart in our "Yellow Pages" section.

Page: **249**


# CLL-Series, Lock Nut Cylinders

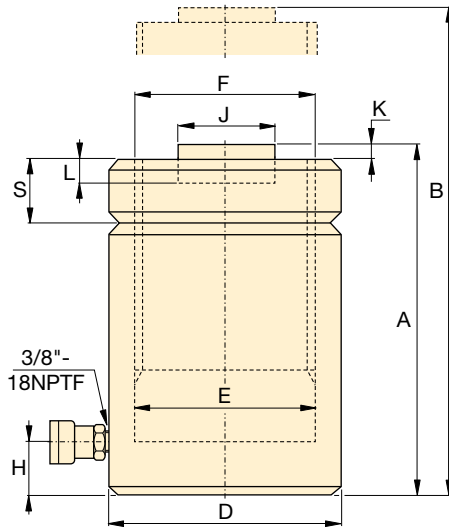

CLL-50 to CLL-250 models

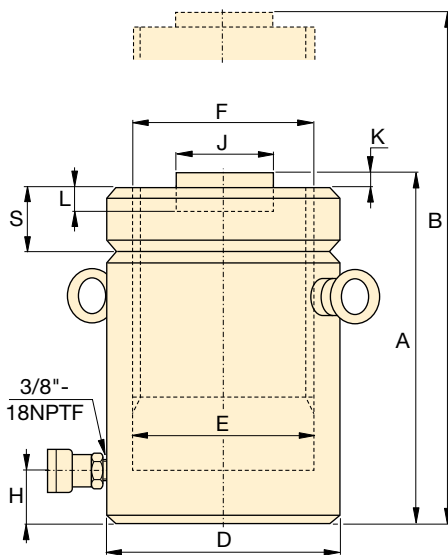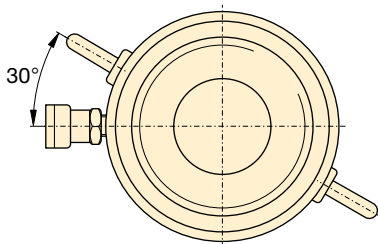

CLL-300 to CLL-1000 models



**Coupler Included!**

CR-400 coupler included on all models. Fits all HC-Series hoses.


◀ For full features see page 44.

Cylinder Capacity (ton) [maximum]	Stroke (in)	Model Number	Cylinder Effective Area (in <sup>2</sup> )	Oil Capacity (in <sup>3</sup> )
50 [59.1]	1.97	CLL-502	10.99	21.63
	3.94	CLL-504	10.99	43.25
	5.91	CLL-506	10.99	64.88
	7.87	CLL-508	10.99	86.51
	9.84	CLL-5010	10.99	108.14
	11.81	CLL-5012	10.99	129.76
100 [102.9]	1.97	CLL-1002	20.57	40.50
	3.94	CLL-1004	20.57	81.00
	5.91	CLL-1006	20.57	121.50
	7.87	CLL-1008	20.57	162.00
	9.84	CLL-10010	20.57	202.50
	11.81	CLL-10012	20.57	242.99
150 [153.9]	1.97	CLL-1502	30.78	60.58
	3.94	CLL-1504	30.78	121.17
	5.91	CLL-1506	30.78	181.75
	7.87	CLL-1508	30.78	242.33
	9.84	CLL-15010	30.78	302.92
	11.81	CLL-15012	30.78	363.50
200 [206.1]	1.97	CLL-2002	41.17	81.04
	5.91	CLL-2006	41.17	243.13
	11.81	CLL-20012	41.17	486.27
250 [284.0]	1.97	CLL-2502	56.75	111.70
	5.91	CLL-2506	56.75	335.11
	11.81	CLL-25012	56.75	670.22
300 [353.6]	1.97	CLL-3002	70.71	139.19
	5.91	CLL-3006	70.71	417.56
	11.81	CLL-30012	70.71	835.11
400 [433.9]	1.97	CLL-4002	86.79	170.84
	5.91	CLL-4006	86.79	512.51
	11.81	CLL-40012	86.79	1025.02
500 [566.3]	1.97	CLL-5002	113.25	222.99
	5.91	CLL-5006	113.25	668.77
	11.81	CLL-50012	113.25	1337.55
600 [662.9]	1.97	CLL-6002	132.57	260.97
	5.91	CLL-6006	132.57	782.90
	11.81	CLL-60012	132.57	1565.81
800 [911.6]	1.97	CLL-8002	182.42	359.09
	5.91	CLL-8006	182.42	1077.27
	11.81	CLL-80012	182.42	2154.55
1000 [1136]	1.97	CLL-10002	227.30	447.43
	5.91	CLL-10006	227.30	1342.30
	11.81	CLL-100012	227.30	2684.59



# Single-Acting, Lock Nut Cylinders

## \*Optional Tilt Saddle



Capacity:  
**50-1,000 tons**

Stroke:  
**1.97-11.81 inches**

Maximum Operating Pressure:  
**10,000 psi**

**CLL**  
Series




Collap. Height	Ext. Height	Outside Diam.	Cyl. Bore Diam.	Plunger Diameter (threaded)	Base to Advance Port	Stand. Saddle Diam.	Saddle Protrusion from Plgr.	Depth of Plunger Hole	Lock Nut Height	Weight	Model Number	* Optional Tilt Saddle		
												Diam.	Height	Model Number
A (in)	B (in)	D (in)	E (in)	F (mm)	H (in)	J (in)	K (in)	L (in)	S (in)	(lbs)		J1 (in)	K1 (in)	
6.46	8.43	4.92	3.74	Tr 95 x 4	1.18	2.80	.08	.51	1.42	35	CLL-502	2.80	.94	CAT-100
8.43	12.36	4.92	3.74	Tr 95 x 4	1.18	2.80	.08	.51	1.42	46	CLL-504	2.80	.94	CAT-100
10.39	16.30	4.92	3.74	Tr 95 x 4	1.18	2.80	.08	.51	1.42	57	CLL-506	2.80	.94	CAT-100
12.36	20.24	4.92	3.74	Tr 95 x 4	1.18	2.80	.08	.51	1.42	68	CLL-508	2.80	.94	CAT-100
14.33	24.17	4.92	3.74	Tr 95 x 4	1.18	2.80	.08	.51	1.42	79	CLL-5010	2.80	.94	CAT-100
16.30	28.11	4.92	3.74	Tr 95 x 4	1.18	2.80	.08	.51	1.42	90	CLL-5012	2.80	.94	CAT-100
7.36	9.33	6.50	5.12	Tr 130 x 6	1.18	2.80	.08	.51	1.73	68	CLL-1002	2.80	.94	CAT-100
9.33	13.27	6.50	5.12	Tr 130 x 6	1.18	2.80	.08	.51	1.73	87	CLL-1004	2.80	.94	CAT-100
11.30	17.20	6.50	5.12	Tr 130 x 6	1.18	2.80	.08	.51	1.73	106	CLL-1006	2.80	.94	CAT-100
13.27	21.14	6.50	5.12	Tr 130 x 6	1.18	2.80	.08	.51	1.73	125	CLL-1008	2.80	.94	CAT-100
15.24	25.08	6.50	5.12	Tr 130 x 6	1.18	2.80	.08	.51	1.73	143	CLL-10010	2.80	.94	CAT-100
17.20	29.02	6.50	5.12	Tr 130 x 6	1.18	2.80	.08	.51	1.73	162	CLL-10012	2.80	.94	CAT-100
8.23	10.20	8.07	6.26	Tr 159 x 6	1.54	5.12	.08	.98	1.73	117	CLL-1502	5.12	.79	CAT-200
10.20	14.13	8.07	6.26	Tr 159 x 6	1.54	5.12	.08	.98	1.73	146	CLL-1504	5.12	.79	CAT-200
12.17	18.07	8.07	6.26	Tr 159 x 6	1.54	5.12	.08	.98	1.73	174	CLL-1506	5.12	.79	CAT-200
14.13	22.01	8.07	6.26	Tr 159 x 6	1.54	5.12	.08	.98	1.73	203	CLL-1508	5.12	.79	CAT-200
16.10	25.94	8.07	6.26	Tr 159 x 6	1.54	5.12	.08	.98	1.73	231	CLL-15010	5.12	.79	CAT-200
18.07	29.88	8.07	6.26	Tr 159 x 6	1.54	5.12	.08	.98	1.73	260	CLL-15012	5.12	.79	CAT-200
9.57	11.54	9.25	7.24	Tr 184 x 6	1.97	5.12	.08	.98	1.97	183	CLL-2002	5.12	.79	CAT-200
13.50	19.41	9.25	7.24	Tr 184 x 6	1.97	5.12	.08	.98	1.97	260	CLL-2006	5.12	.79	CAT-200
19.41	31.22	9.25	7.24	Tr 184 x 6	1.97	5.12	.08	.98	1.97	376	CLL-20012	5.12	.79	CAT-200
9.80	11.77	10.83	8.50	Tr 216 x 6	1.97	5.91	.08	.98	2.20	256	CLL-2502	5.91	.83	CAT-250
13.74	19.65	10.83	8.50	Tr 216 x 6	1.97	5.91	.08	.98	2.20	359	CLL-2506	5.91	.83	CAT-250
19.65	31.46	10.83	8.50	Tr 216 x 6	1.97	5.91	.08	.98	2.20	515	CLL-25012	5.91	.83	CAT-250
11.61	13.58	12.20	9.49	Tr 241 x 6	2.32	5.47	.20	.98	2.36	382	CLL-3002	7.68	2.95	CAT-300
15.55	21.46	12.20	9.49	Tr 241 x 6	2.32	5.47	.20	.98	2.36	514	CLL-3006	7.68	2.95	CAT-300
21.46	33.27	12.20	9.49	Tr 241 x 6	2.32	5.47	.20	.98	2.36	712	CLL-30012	7.68	2.95	CAT-300
13.19	15.16	13.78	10.51	Tr 266 x 6	2.76	6.26	.20	.98	2.76	553	CLL-4002	8.86	3.35	CAT-400
17.13	23.03	13.78	10.51	Tr 266 x 6	2.76	6.26	.20	.98	2.76	721	CLL-4006	8.86	3.35	CAT-400
23.03	34.84	13.78	10.51	Tr 266 x 6	2.76	6.26	.20	.98	2.76	972	CLL-40012	8.86	3.35	CAT-400
14.76	16.73	15.75	12.01	Tr 305 x 6	3.15	7.05	.20	.98	3.15	809	CLL-5002	9.84	3.58	CAT-500
18.70	24.61	15.75	12.01	Tr 305 x 6	3.15	7.05	.20	.98	3.15	1029	CLL-5006	9.84	3.58	CAT-500
24.61	36.42	15.75	12.01	Tr 305 x 6	3.15	7.05	.20	.98	3.15	1360	CLL-50012	9.84	3.58	CAT-500
15.55	17.52	16.93	12.99	Tr 330 x 6	3.35	7.64	.20	.98	3.35	985	CLL-6002	10.83	3.78	CAT-600
19.49	25.39	16.93	12.99	Tr 330 x 6	3.35	7.64	.20	.98	3.35	1241	CLL-6006	10.83	3.78	CAT-600
25.39	37.20	16.93	12.99	Tr 330 x 6	3.35	7.64	.20	.98	3.35	1625	CLL-60012	10.83	3.78	CAT-600
17.91	19.88	19.88	15.24	Tr 387 x 6	3.94	8.82	.20	.98	3.94	1565	CLL-8002	12.60	4.84	CAT-800
21.85	27.76	19.88	15.24	Tr 387 x 6	3.94	8.82	.20	.98	3.94	1918	CLL-8006	12.60	4.84	CAT-800
27.76	39.57	19.88	15.24	Tr 387 x 6	3.94	8.82	.20	.98	3.94	2446	CLL-80012	12.60	4.84	CAT-800
19.49	21.46	22.05	17.01	Tr 432 x 6	4.33	9.80	.20	.98	4.33	2094	CLL-10002	14.17	5.35	CAT-1000
23.43	29.33	22.05	17.01	Tr 432 x 6	4.33	9.80	.20	.98	4.33	2517	CLL-10006	14.17	5.35	CAT-1000
29.33	41.14	22.05	17.01	Tr 432 x 6	4.33	9.80	.20	.98	4.33	3151	CLL-100012	14.17	5.35	CAT-1000

▼ Shown: LB-28



## Low Clearance Lifting Using Compressed Air or Water



### LPC-2421

Use a 24" x 24" lifting bag base under lifting bag to provide a flat surface and protect the lifting bag from debris damage.



### Plastic Cribbing

Safely support lifted loads using Enerpac Plastic Cribbing. Available in three sizes and as wedges to help stabilize stacks.

Page: 50



### Ultra-low Clearance Loads

Lift up to 16 tons with minimal clearance gap of only .38 inch with LW-16 Lifting Wedge.

Page: 174

- Nine sizes with capacities from 3 to 74 tons; Kevlar® reinforced and “center target” marked to assure safety in use
- Aggressive high-friction surface to prevent bags from slipping
- Non-conducting rubber, resists oil and most chemicals; operating temperature range is -40° F to 200° F
- Larger sizes provided with Nylon® straps and heavy-duty reinforced lugs
- Industrial interchange air supply to deadman controller; safety coupler inflation hoses protect against accidental disconnections
- Inflatable using shop air or water






◀ An Enerpac LB-6 lifting bag preparing to lift a CNC machining center.

### Controller Types

Pneumatic Deadman

Pneumatic or Water Ball Valve



CACG2

CACG1

CACW1

# Lifting Bags

## LB Series




Lifting Bag Capacity:  
**3-74 tons**

Collapsed Height:  
**1.1-1.2 inches**


Maximum Inflated Height:  
**5.1-20.0 inches**

Maximum Operating Pressure:  
**116 psi**

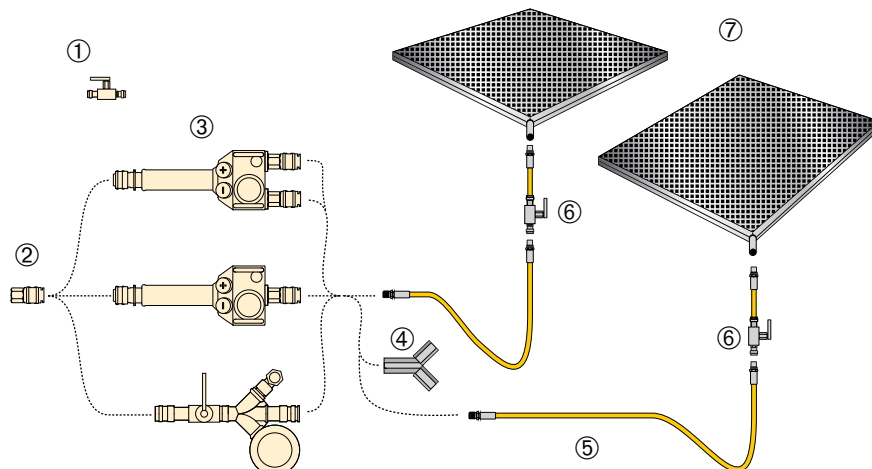

### ▼ SELECTION CHART

Item No.	Model No. Usage With Air	Model No. Usage With Water	Description
①	CAPA1	-	Portable Compressor Adaptor
②	CACA1	-	Construction Compressor Adaptor
③	CACG1	-	Single Deadman Controller
	CACG2	-	Double Deadman Controller
	CACW1	CACW1	Single Ball Valve Controller
④	CAYC	CAYC	"Y" Connector for Twin application
⑤	A0820	-	Yellow inflation Hose 20 ft.
	-	W0801	Blue inflation Hose 1 ft.
	-	WP801	Blue inflation Hose 1 ft. (garden)
	-	W0820	Blue inflation Hose 20 ft
⑥	A0801	-	Yellow hose 1 ft with Pressure Relief Valve and Ball Valve
⑦	LB3.....LB74	LB3.....LB74	Lifting Bags (see below)

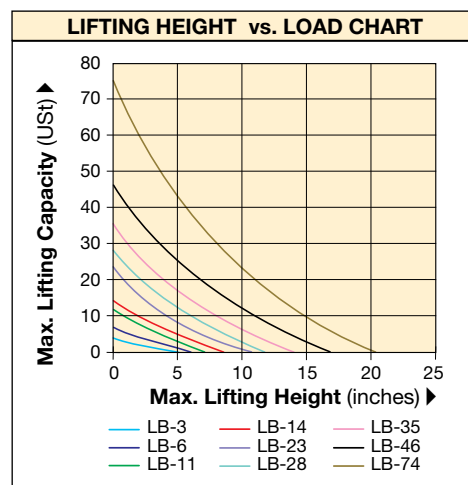

*Lifting Bag Capacity (ton)	Collapsed Height (in)	Maximum Lifting Height (in)	Maximum Inflated Height (in)	Model Number	*Capacity @ 50% Extended Height (cu ft)	Length X Width (in)	Nylon Straps and Lugs Included	Weight (lbs)
3	1.1	5.1	6.2	LB-3	0.70	9 x 9	-	2.8
6	1.1	5.9	7.0	LB-6	1.80	12 x 12	-	5.3
11	1.1	7.1	8.2	LB-11	4.00	15 x 15	-	8.8
14	1.1	8.7	9.8	LB-14	4.30	18 x 18	-	11.7
23	1.1	10.6	11.7	LB-23	7.20	22 x 22	-	17.9
28	1.2	11.8	13.0	LB-28	8.50	24 x 24	●	24.7
35	1.2	14.2	15.4	LB-35	9.80	27 x 27	●	29.3
46	1.2	16.5	17.7	LB-46	12.80	30 x 30	●	40.1
74	1.2	20.0	21.3	LB-74	21.00	36 x 36	●	55.8

\* Lifting capacity reduces as lifting bag height increases.

▼ Shown: LPC6701-B, LPC4401-Y, LPC2401-B, LPC3W-B



## Durable Crib Blocks Safely Support and Stabilize Lifted Loads



### Lifting Bags

Safely lift loads using Enerpac Lifting Bags. Inflatable using compressed air or water.

Page: 48



### Properties

Enerpac plastic cribbing blocks can be nailed, screwed or sawn like wood. Piloted ignition is similar to wood.



### Crib Block Capacity


Crib stack may compress up to 2 inches at 70° F with no cracked blocks. Ratings are based on a full press load in which the load is evenly distributed across the crib stack using a 1-inch steel plate to spread the load. Do not load any localized area of a crib or cribbing block at more than 1600 psi.

- Multiple sizes, shapes fit most applications
- Interlocking or aggressive non-slip surface
- \*Non-conducting plastic resists oil and most chemicals
- Does not splinter, like wood
- Does not snap and fail, like wood
- Operating temperature range is -40° F to 176° F (-40° C to +80° C)
- Carrying lanyards provided on all 6" x 7" and on yellow 4" x 4" crib blocks
- Made from 100% recycled plastics


▼ Enerpac cribbing blocks build a stable, interlocked platform for lifting a ship.




Single Crib



2 Box Interlocked Crib



3 Box Interlocked Crib



Nominal Block Dimensions (in)	Single Crib Block Capacity (ton)	2 Box Crib Stack		3 Box Crib Stack	
		Max. Stack Height (in)	Max. Capacity (ton)	Max. Stack Height (in)	Max. Capacity (ton)
2 x 4 x 18	40	36	30	40	70
4 x 4 x 18	40	45	30	48	70
6 x 7 x 24	60	57	60	64	100

\* Reference a plastic compatibility source for HDPE/PP chemical resistance.

# Plastic Cribbing Blocks



## Enerpac Cribbing Blocks – for Superior Crib Stability

Enerpac plastic cribbing blocks are designed to provide superior crib stability compared to standard hardwood and softwood products. Enerpac plastic cribbing blocks won't fail catastrophically like wooden cribbing; instead of snapping or cracking and collapsing, it gradually deforms providing a visual warning of overload.

In addition, unlike wood products, Enerpac plastic cribbing blocks do not splinter or absorb most fluids. Convenient sizes help to quickly and safely build stable cribs to support loads.

Enerpac cribbing blocks have two distinct surfaces: interlocking and pyramid. The interlocking surface ensures block alignment at a 90° angle; the pyramid surface can be utilized to build crib stacks at odd angles, less than 90°.

## LPC Series



Minimum Clearance:

**2.1 inches**

Maximum Crib Height:

**64 inches**

\*\*Maximum Capacity:

**30-100 tons**

Temperature Operating Range:


**-40 °F to 176 °F**



### Think Safety!

Do not mix different materials in crib stacks. Stable crib stacks require blocks with similar friction, compression and deflection rates. Use wedges to stabilize crib stacks when necessary.

Reference dimensions are in inches.

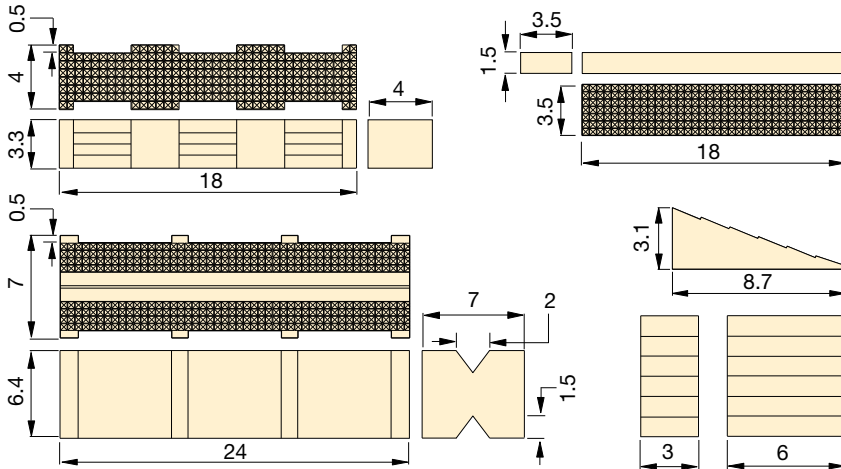

	Model Number	Kit Piece Count					Nylon Carrying Tote	Volume (cu ft)	Weight (lbs)
		*2 x 4 x 18"	*4 x 4 x 18"	*6 x 7 x 24"	3" Wedge	6" Wedge			
		Black	Black / Yellow	Black / Yellow	Black	Black			
Single Blocks	LPC2401-B	1	-	-	-	-	-	0.08	3.00
	LPC4401-B	-	1	-	-	-	-	0.17	5.25
	LPC4401-Y	-	1	-	-	-	-	0.17	5.25
	LPC6701-B	-	-	1	-	-	-	0.56	25.00
	LPC6701-Y	-	-	1	-	-	-	0.56	25.00
	LPC3W-B	-	-	-	1	-	-	0.02	1.50
	LPC6W-B	-	-	-	-	1	-	0.09	2.50
2 x 4 Kits	LPC2418	18	-	-	3	-	1	1.63	62.50
	LPC2436	36	-	-	6	-	2	3.18	116.00
	LPC2472	72	-	-	9	-	4	6.38	233.50
4 x 4 Kits	LPC4409	-	5 / 4	-	2	-	1	1.58	49.75
	LPC4418	-	10 / 8	-	3	-	2	3.19	101.00
	LPC4436	-	20 / 16	-	8	-	4	6.43	205.00
	LPC4472	-	40 / 32	-	9	-	8	12.70	399.50
6 x 7 Kits	LPC6704	-	-	2 / 2	-	1	-	2.34	102.50
	LPC6708	-	-	4 / 4	-	3	-	4.77	207.50
	LPC6720	-	-	11 / 9	-	7	-	11.87	517.50
	LPC6750	-	-	28 / 22	-	8	-	29.45	2787.50

\* NOTE: Cribbing block dimensions are nominal. Refer to reference dimension drawing

\*\* NOTE: Distribute load over largest possible crib stack surface area. Do not load any localized area of a crib or cribbing block at more than 1600 psi.

▼ Shown from left to right: JHA-356, JHA-156



## JH, JHA Series

Capacity:  
**7-150 tons**

Stroke:  
**3.00-6.13 inches**

Maximum Operating Pressure:  
**10,000 psi**

- All-directional operation on 7, 15 and 35 ton models
- Internal relief valve to prevent overloading
- Machined flat front and bottom surfaces permit flush alignment in tight corners
- All models include pumping handle
- Chrome plated plungers



### Lifting Wedge and Machine Lifts

Ideal to lift the load the first few inches. The **LW-16** Lifting Wedge requires a very small access gap of only .39 in.

Page: **165**



### Load Skates

For moving heavy loads easily and safely.

Page: **176**



### Plastic Cribbing

Safely support lifted loads using Enerpac Plastic Cribbing. Available in three sizes and as wedges to help stabilize stacks.

Page: **50**

Style	Jack Capacity (ton)	Stroke (in)	Model Number	Jack Effective Area (in <sup>2</sup> )	Collapsed Height (in)	Extended Height (in)	Bottom Plate Dimensions (W x L) (in)	Plunger Diameter (in)	Pump Speed	Weight (lbs)
Aluminum Jack	7	3.00	JHA-73	1.49	5.25	8.25	2.88 x 6.25	1.19	Single	11
	15	6.06	JHA-156	3.14	9.75	15.81	3.63 x 9.38	1.63	Single	29
	35	6.13	JHA-356	7.07	10.13	16.25	4.63 x 10.00	2.13	Single	40
	75	6.06	JHA-756	15.90	11.25	17.31	6.88 x 12.81	4.50	Single	94
	150	6.13	JHA-1506	30.68	12.88	19.00	9.50 x 16.06	6.25	2-Speed	210
Steel Jack	30	6.13	JH-306	5.94	10.00	16.13	3.75 x 9.56	2.75	Single	59
	50	6.09	JH-506	9.62	10.25	16.34	5.00 x 10.19	3.50	2-Speed	90
	100	6.06	JH-1006	20.63	11.31	17.37	7.13 x 12.94	5.12	2-Speed	184

# Industrial Bottle Jacks

▼ Shown: EBJ-4GC, EBJ-50GC, EBJL-15GC, EBJ-12GC



## EBJ Series

Capacity:

**1.5-100 tons**

Stroke:


**3.03-20.00 inches**

- Lower handle effort reduces operator fatigue
- Fully serviceable
- Cast beam and forged pump linkage
- Pumping handle included on all models
- Safety relief valve to prevent overload
- Automatic by-pass port to prevent over-extension
- Wiper seal for extended life
- Chrome plating on pump and ram plungers



### Screw Feature

Heat treated, adjustable extension screw with cleated saddle on selected EBJ models helps adjusting and prevents slipping.



### Pump and Cylinder Sets

As an alternative to Industrial Bottle Jacks where the operator is required to stand remote from the jacking point, see the range of pump and cylinder sets.

Page: 58

Jack Capacity	Stroke	Model Number	Screw Extension	Minimum Height	Maximum Height	Plunger Diameter	Saddle Diameter	Base Dimensions L x W	Weight
(ton)	(in)		(in)	(in)	(in)	(in)	(in)	(in)	(lbs)
1.5	18.00	↕ EBJL-15GC	–	21.72	39.72	.88	.75	3.63 x 5.00	12.8
2	3.74	EBJ-2GC	2.76	6.89	13.39	.87	.83	4.02 x 3.78	6.6
3	20.00	↕ EBJL-3GC	–	26.31	46.31	1.12	1.12	4.25 x 5.50	22.0
4	4.72	EBJ-4GC	2.76	7.68	15.16	1.11	1.03	4.41 x 4.13	9.3
6	5.12	EBJ-6GC	3.15	8.27	16.54	1.34	1.19	4.72 x 4.49	12.1
8	5.51	EBJ-8GC	3.15	8.66	17.32	1.50	1.34	4.92 x 4.69	13.7
12	6.10	EBJ-12GC	3.15	9.45	18.70	1.70	1.58	5.31 x 5.12	17.6
12	3.03	* EBJS-12GC	1.69	6.10	10.83	1.70	1.58	5.31 x 5.12	14.6
15	5.91	EBJ-15GC	3.15	9.45	18.50	1.89	1.70	5.71 x 5.43	20.7
20	6.10	EBJ-20GC	3.15	9.84	19.09	2.09	1.82	6.10 x 5.71	25.1
20	3.11	* EBJS-20GC	1.61	6.50	11.22	2.09	1.82	6.10 x 5.71	19.8
30	6.89	↕ EBJ-30GC	–	11.22	18.11	2.80	2.72	7.48 x 5.91	56.9
50	4.33	↕ EBJ-50GC	–	9.25	13.58	3.35	3.15	10.04 x 7.48	92.6
100	5.32	↕ EBJ-100GC	–	12.20	17.52	4.89	3.94	11.81 x 9.45	198.9

\* Short bottle jack    ↕ Without extension screw  
All EBJ Jacks meet or exceed: ANSI, PALD, CE

▼ Shown: PRASA10027L



## Safe, Efficient, Mobile Load Lifting

- 60, 100, 150 and 200-ton capacities with pneumatic or electric pumps for the toughest jobs
- 4" ground clearance for transport over rail and rough terrain
- Three position handle provides easy tilt back and transport
- Complies with ASME/ANSI B30.1 specifications
- Easy to change external filter minimizes down time
- Rugged, fully enclosed 24" wide frame with no exposed fittings or hoses
- SUP-R-STACK™ Extension System allows lifting at all heights without blocking.



Standard 12' pendant cord for air driven units with pneumatic valves and 20' pendant cord for electric driven units keeps operator away from the load.

▼ Versatility for rail maintenance. One jack for all cars from Intermodal to High Hopper with 28 heights in between.



Capacity	Stroke	Electric Pump Model Number	Weight
(ton)	(in)	(115 VAC)	(lbs)
60	14	PREMB06014L	390
	27	PREMB06027L	600
100	16	PREMB10016L	510
	27	PREMB10027L	600
	16	-	-
150	27	-	-
	15.5	-	-
	26.5	-	-
	15.5	PREMB15016L	570
200	26.5	PREMB15027L	708
	15.5	-	-
	26.5	-	-

(PR-Series not available in Canada. Contact Enerpac.)



# POW'R-RISER® Lifting Jack



## SUP-R-STACK™ Extensions

Increase useful height from 5" to 18".

Model No.	Size (in)	Model No.	Size (in)
PRE5	5	PRE11	11
PRE7	7	PRE14	14
PRE9	9	PRE18	18
PRES6024	Extension set includes PRE5, PRE7, PRE11 and PRE18		



## Spacers

Fine tune your Extension stack height.

Model No.	Size (in)	Model No.	Size (in)
PRS1	1	PRS3	3
PRS2	2	-	-
PRS4	Set includes (2) PRS1, (1) PRS2 and (1) PRS3		

## PR Series



Rated Lifting Capacity:  
**60-200 tons**

Stroke:  
**14-27 inches**

Maximum Operating Pressure:  
**10,000 psi**



### WARNING!

**Extensions:** Any two Extensions may be stacked for loads up to 60 tons. For loads over 60 tons or strokes over 14" only one Extension and one Spacer can be used.


**Spacers:** Never exceed 3" in total Spacer height.

Cap. (ton)	Swivel Load Cap	Locking U-Rings					Set Model Number	Locking U-Ring Sets Include
		1 in.	3 in.	4½ in.	5½ in.	10 in.		
60	PRTS60	PRU11	PRU13	PRU14	-	PRU110	<sup>1</sup> PRUS126	(2) PRU11, (1) PRU13, (2) PRU14
							<sup>2</sup> PRUS137	(2) PRU11, (1) PRU13, (2) PRU14 (1) PRU110
100	PRTS60	PRU11	PRU13	PRU14	-	PRU110	<sup>1</sup> PRUS126	(2) PRU11, (1) PRU13, (2) PRU14
							<sup>2</sup> PRUS137	(2) PRU11, (1) PRU13, (2) PRU14 (1) PRU110
150	PRTS150	PRU151	PRU153	-	PRU155	PRU1510	<sup>3</sup> PRUS1526	(2) PRU151, (1) PRU153, (2) PRU155
							<sup>2</sup> PRUS1537	(2) PRU151, (1) PRU1510, (2) PRU155
200	PRTS200	PRU201	PRU203	-	PRU205	PRU2010	<sup>3</sup> PRUS2026	(2) PRU201, (1) PRU203, (2) PRU205
							<sup>2</sup> PRUS2037	(2) PRU201, (1) PRU2010, (2) PRU205

<sup>1</sup> For 14 and 16" stroke models

<sup>2</sup> For 27" stroke models

<sup>3</sup> For 15.5" stroke models

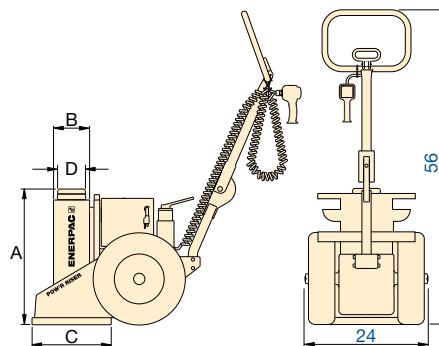

Dimensions shown in inches.

Air Pump	Weight (lbs)	A	B	C	D	Max. Additional Stack Height Using Optional Ext. System (in)	Valve Type
PRAMA06014L	390	24	6.4	14	4	32*	Manual
PRAMA06027L	600	37	6.4	14	4	11	
PRAMA10016L	510	26	7.0	18	4	21**	Pneumatic
PRAMA10027L	600	37	7.0	18	4	11	
PRASA10016L	510	26	7.0	18	4	21**	
PRASA10027L	600	37	7.0	18	4	11	
PRASA15016L	570	26	8.0	18	5	21**	Manual
PRASA15027L	708	37	8.0	18	5	11	
-	-	26	8.0	18	5	21**	Manual
-	-	37	8.0	18	5	11	
PRASA20016L	640	26	9.5	18	6	21**	Pneumatic
PRASA20027L	825	37	9.5	18	6	11	

\* Based on one 18" and one 11" Extension and one 3" Spacer.

\*\* Based on one 18" Extension and one 3" Spacer.

For power source, the following characters should be inserted in the 5th space of the model number.

### Ordering Example:

**Model No. PREMI06014L** is a 14" stroke, 60 ton model, with a manual valve and a 208-240 VAC, 1-ph electric motor.

- A Air Pump, 50 scfm, 80 psi
- B 115 VAC, 1-ph., 50-60 Hz, 20 A
- E 208-240 VAC, 1-ph., 50-60 Hz, Euro Plug, 10 A
- I 208-240 VAC, 1-ph., 50-60 Hz, USA Plug, 10 A
- G <sup>1</sup>208-240 VAC, 3-ph., 50-60 Hz
- W <sup>1</sup>380-415 VAC, 3-ph., 50-60 Hz
- J <sup>1</sup>440-480 VAC, 3-ph., 50-60 Hz
- R <sup>1</sup>575 VAC, 3-ph., 50-60 Hz

<sup>1</sup> Not available for 60-ton capacity

▼ Shown from left to right: P-142ALSS, P-392ALSS, V-152NV, V-66NV, RC256NV, RC-106NV, RC-53NV



## Maximum Corrosion Resistance



Use Enerpac **Extreme Environment Products** in wet environments such as food processing, pulp and paper, mining, construction and applications in high temperature or in welding areas.

- Corrosion resistant, nickel-plated valves and cylinders
- Stainless steel pump inserts will not corrode
- Viton® Seals provide heat and chemical resistance
- Anodized aluminum pump reservoirs and plastic encapsulated pump bodies resist wet environments
- Two-speed operation reduces pump handle strokes 78% compared to single-speed pumps
- Pump handles lock for easy carrying



### 700, 900 Series Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 118

### ▼ CYLINDER CHART



Cylinder Capacity (ton)	Stroke (in)	Model Number	Oil Capacity (in <sup>3</sup> )	Pressure Rating (psi)	Port Dimension (in)	Collapsed Height		Extended Height		Outside Diameter (in)
						A (in)	B (in)	B (in)	D (in)	
5	3.0	RC-53NV	2.98	10,000	3/8"-18 NPTF	6.50	9.50	1.50		
10	2.0	RC-102NV	4.75	10,000	3/8"-18 NPTF	4.78	6.91	2.25		
10	6.0	RC-106NV	13.70	10,000	3/8"-18 NPTF	9.75	15.88	2.25		
25	6.0	RC-256NV	32.23	10,000	3/8"-18 NPTF	10.75	17.00	3.38		

### ▼ HAND PUMP CHART



Pump Type	Oil Capacity	Model Number	Pressure Rating (psi)	Oil Displacement per Stroke (in <sup>3</sup> )	Port Dimension (in)	Piston Stroke (in)
	(in <sup>3</sup> )					
Two Speed	20	P-142ALSS	200/10,000	0.221/0.055	1/4"-18 NPTF	.50
	55	P-392ALSS	200/10,000	0.687/0.151	3/8"-18 NPTF	1.00

### ▼ VALVE CHART\*




Valve Type	Model Number	Pressure Function	Pressure Rating (psi)
Manual Check Valve	V-66NV	Check	10,000
Pressure Relief Valve	V-152NV	+ 3% Repeatability	800/10,000

\* See page 132 for valve function information of standard model products.

# Extreme Environment Products

## P-392ALSS

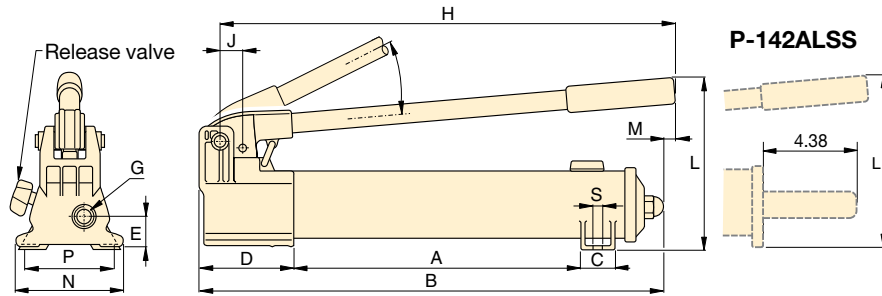

## RC P V Series




Cylinder Capacity:  
**5-25 tons**


Stroke:  
**2-6 inches**

Maximum Operating Pressure:  
**10,000 psi**


## RC-102NV, RC-106NV, RC-256NV

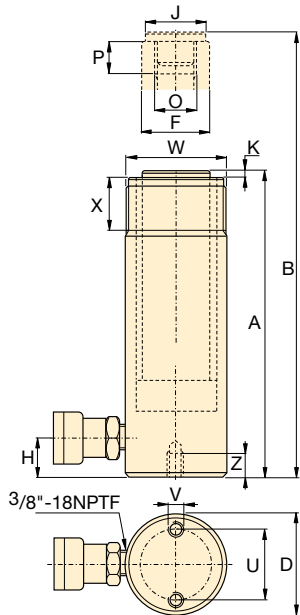

## V-66NV

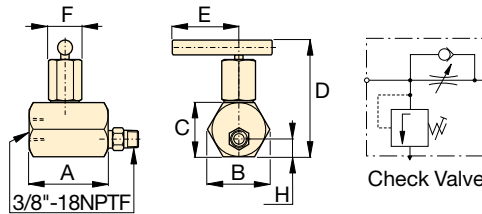

## V-152NV

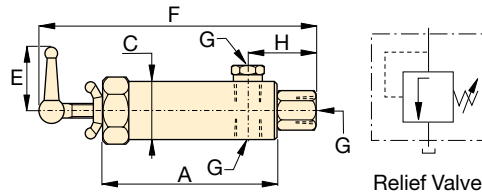

### Multifluid Hand Pumps

**MP-Series** corrosion resistant hand pumps for low pressure filling and high pressure testing

applications, suitable for a wide range of fluids.

Page: 69

Plunger Diam.	Base to Adv. Port	Saddle Diam.	Saddle Protrusion from Plngr.	Plunger Internal Thread	Plunger Thread Length	Base Mounting Holes			Collar Thread	Collar Thread Length	Weight (lbs)	Model Number
						Bolt Circle U (in)	Thread V (in)	Thrd. Depth Z (in)				
F (in)	H (in)	J (in)	K (in)	O (in)	P (in)	U (in)	V (in)	Z (in)	W (in)	X (in)		
1.00	.75	1.00	.25	3/4"-16	.56	1.00	1/4"-20UN	.56	1 1/2"-16	1.13	3.3	RC-53NV
1.50	.75	1.38	.25	1"-8	.75	1.56	5/16"-18UN	.50	2 1/4"-14	1.13	5.1	RC-102NV
1.50	.75	1.38	.25	1"-8	.75	1.56	5/16"-18UN	.50	2 1/4"-14	1.13	9.8	RC-106NV
2.25	1.00	2.00	.41	1 1/2"-16	1.00	2.31	1/2"-13UN	.75	3 5/16"-12	1.94	22.0	RC-256NV

Pump Dimensions (in)													Weight (lbs)	Model Number
A	B	C	D	E	G	H	J	L	M	N	P	S		
7.31	13.25	1.13	3.37	1.13	1/4"-18 NPTF	12.56	.75	5.63	-	3.75	3.18	.28	4.5	P-142ALSS
13.56	21.00	1.44	3.93	1.31	3/8"-18 NPTF	20.56	1.19	7.00	.63	4.75	-	-	9.0	P-392ALSS

Valve Dimensions (in)									Weight (lbs)	Model Number
A	B	C	D	E	F	G	H			
3.50	2.25	2.00	4.00	2.00	0.87	3/8"-18 NPTF	1.00	3.9	V-66NV	
4.53	-	1.50	-	3.12	7.62	3/8"-18 NPTF	1.53	3.5	V-152NV	

▼ Shown cylinder-pump set: SCR-1010H



## The Quickest and Easiest Way to Start Working Right Away





- Optimum match of individual components
- Sets include 6 foot safety hose, calibrated gauge with gauge adaptor
- All hand pumps are two-speed



### Speed Chart

See the Enerpac Cylinder Speed Chart in our “Yellow Pages” section.

Page: 249

<b>1 Cylinder Selection</b> (See Cylinder Section of this catalog for full product descriptions)		Nominal Set Capacity (ton)	Cylinder Model No.	Stroke (in)	Collapsed Height (in)
 <p><b>Single-acting, General Purpose Cylinders:</b> For maximum versatility. <b>RC-Series</b></p>	Page: 6	5	RC-55	5.00	8.50
		10	RC-102	2.13	4.78
			RC-106	6.13	9.75
			RC-1010	10.13	13.75
		15	RC-154	4.00	7.88
			RC-156	6.00	10.69
		25	RC-252	2.00	6.50
			RC-254	4.00	8.50
			RC-256	6.25	10.75
			RC-2514	14.25	18.75
50	RC-506	6.25	11.13		
 <p><b>Single-acting, Low Height Cylinders:</b> Ideal where space is restricted. <b>RCS-Series</b></p>	Page: 22	10	RCS-101	1.50	3.47
		20	RCS-201	1.75	3.88
		30	RCS-302	2.44	4.63
		50	RCS-502	2.38	4.81
		100	RCS-1002	2.25	5.56
 <p><b>Single-acting, Hollow Cylinders:</b> For pushing and pulling applications. <b>RCH-Series</b></p>	Page: 26	12	RCH-121	1.63	4.75
		20	RCH-202	2.00	6.31
		30	RCH-302	2.50	7.03
		60	RCH-603	3.00	9.75
		100	RCH-1003	3.00	10.00
 <p><b>Pull Cylinders:</b> The ultimate in pulling power. <b>BRP-Series</b></p>	Page: 24	10	BRP-106C	5.95	23.11
			BRP-106L	5.95	21.33
		30	BRP-306	6.10	42.72
		60	BRP-606	5.98	28.34
		-	-	-	-

# Single-Acting, Cylinder Pump Sets

## SC Series



Capacity:

**5-100 tons**

Stroke:

**1.50-14.25 inches**

Maximum Operating Pressure:

**10,000 psi**

### SELECTION EXAMPLE

#### Selected cylinder:

- RC-106, Single-acting cylinder with 6.13" stroke

#### Selected pump:

- P-392, Lightweight hand pump

#### Set model number:

- SCR-106H

#### Included:

- HC-7206 hose
- GF-10P gauge
- GA-2 adaptor

### SET SELECTION:

- 1 Select the cylinder
- 2 Select the pump
- 3 Find the set model number in the blue field of the matrix

2

### Pump selection (See Pump Section of this catalog for full product descriptions)

### Accessories Included

Hand Pump P-142	Hand Pump P-392	Hand Pump P-80	Foot Pump P-392FP	XA-Series Air Pump XA-11	Hose Model No.	Gauge Model No.	Gauge Adaptor Model No.
SCR-55H	-	-	-	-	HC-7206	GP-10S	GA-4
-	SCR-102H	-	SCR-102FP	SCR-102A	HC-7206	GF-10P	GA-2
-	SCR-106H	-	SCR-106FP	SCR-106A	HC-7206	GF-10P	GA-2
-	SCR-1010H	-	SCR-1010FP	SCR-1010A	HC-7206	GF-10P	GA-2
-	SCR-154H	-	SCR-154FP	SCR-154A	HC-7206	GP-10S	GA-2
-	SCR-156H	-	SCR-156FP	SCR-156A	HC-7206	GP-10S	GA-2
-	SCR-252H	-	SCR-252FP	SCR-252A	HC-7206	GF-20P	GA-2
-	SCR-254H	-	SCR-254FP	SCR-254A	HC-7206	GF-20P	GA-2
-	SCR-256H	-	SCR-256FP	SCR-256A	HC-7206	GF-20P	GA-2
-	-	SCR-2514H	-	SCR-2514A <sup>1)</sup>	HC-7206	GF-20P	GA-2
-	-	SCR-506H	-	SCR-506A <sup>1)</sup>	HC-7206	GF-50P	GA-2
-	SCL-101H	-	SCL-101FP	SCL-101A	HC-7206	GF-10P	GA-2
-	SCL-201H	-	SCL-201FP	SCL-201A	HC-7206	GF-230P	GA-2
-	SCL-302H	-	SCL-302FP	SCL-302A	HC-7206	GF-230P	GA-2
-	SCL-502H	-	SCL-502FP	SCL-502A	HC-7206	GF-510P	GA-2
-	-	SCL-1002H	-	-	HC-7206	GF-510P	GA-2
SCH-121H	-	-	-	-	HB-7206	GF-120P	GA-4
-	SCH-202H	-	SCH-202FP	SCH-202A	HC-7206	GF-813P	GA-3
-	SCH-302H	-	SCH-302FP	SCH-302A	HC-7206	GF-813P	GA-3
-	-	SCH-603H	-	SCH-603A <sup>1)</sup>	HC-7206	GF-813P	GA-3
-	-	SCH-1003H	-	-	HC-7206	GP-10S	GA-2
-	SCP-106CH	-	SCP-106CFP	-	HC-7206	GP-10S	GA-2
-	SCP-106LH	-	SCP-106LFP	-	HC-7206	GP-10S	GA-2
-	-	SCP-306H	-	-	HC-7206	GP-10S	GA-2
-	-	SCP-606H	-	-	HC-7206	GP-10S	GA-2
-	-	-	-	-	-	-	-

<sup>1)</sup> XA-12

**E**NERPAC hydraulic pumps are available in over 1,000 different configurations. Whatever your high pressure pump needs are... speed, control, intermittent or heavy-duty performance... you can be sure that Enerpac has the pump to suit the application.

Featuring Hand, Battery, Electric, Air and Gasoline powered models, with multiple reservoir and valve configurations, Enerpac offers the most comprehensive high pressure pump line available.



### Pump Selection

For help in selecting the correct pump for your application, please review our **"Yellow Pages"**. If you require further assistance, contact the Enerpac office located near you.

Page: 244























### Torque Wrench Pumps

System matched air and electric pumps provide control to operate Enerpac Torque Wrenches.

Page: 204



# Pumps and Directional Control Valves Section Overview

Power Source	Pump Types	Maximum Reservoir Capacity	Max. Flow at Rated Pressure (in <sup>3</sup> /min)	Series		Page
Manual	<b>Lightweight Hand Pumps</b> Exclusively from Enerpac	155 in <sup>3</sup>	.15 (in <sup>3</sup> /stroke)	P		62 ▶
	<b>Steel Hand Pumps</b>	453 in <sup>3</sup>	.29	P		64 ▶
	<b>Low Pressure Hand Pumps</b>	200 in <sup>3</sup>	.58 (in <sup>3</sup> /stroke)	P		66 ▶
	<b>Foot Pump</b> For Hands Free Operation	38 in <sup>3</sup>	.15 (in <sup>3</sup> /stroke)	P		68 ▶
	<b>Multifluid Hand Pumps</b> Pumping Fluids up to 14,500 psi	38 in <sup>3</sup>	1.28 (in <sup>3</sup> /stroke)	MP		69 ▶
	<b>Ultra-High Pressure Hand Pumps</b> Pressure up to 40,000 psi	60 in <sup>3</sup>	.15 (in <sup>3</sup> /stroke)	P/11		70 ▶
Electric	<b>Battery Powered Hydraulic Pump</b> Cordless Hydraulic Power	1 gal.	15	BP		72 ▶
	<b>Economy Series</b> Compact and Portable	1 gal.	20	PU		74 ▶
	<b>Submerged Series</b> Powerful and Low-Noise	1.5 gal.	20	PE		76 ▶
	<b>Z-Class Pumps, ZU4 and ZE3 to ZE6-Series</b> Portable and Powerful	10 gal.	60 200	ZU ZE		82 ▶
	<b>8000-Series</b> The Maximum Flow Pump	25 gal.	462	PE		94 ▶
Air	<b>XA-Series</b> XVARI® Technology for Productivity and Ergonomics	122 in <sup>3</sup>	15	XA		96 ▶
	<b>Turbo II Air Hydraulic Pumps</b> Compact Air Over Hydraulic	305 in <sup>3</sup>	10	PA		98 ▶
	<b>Air Hydraulic Pumps</b> Single and Twin-Air Motor	2 gal.	9	PA PAM		100 ▶
	<b>ZA4 Air Hydraulic Pumps</b> The Standard for Air-Hydraulic Pumps	10 gal.	80	ZA		102 ▶
	<b>ATP-Series Air Pump</b> High Pressure Air Pump	1 gal.	4	ATP		104 ▶
Gasoline	<b>Atlas Series</b> Small and Lightweight	2 gal.	40	PGM		105 ▶
	<b>ZG5/ZG6 Gasoline Hydraulic Pumps</b> Gas Powered High Flow Pumps	10 gal.	200	ZG5/ ZG6		106 ▶
	<b>8000-Series Gasoline Pumps</b> For the Largest Jobs	25 gal.	1.5 (gal/min)	EGM		108 ▶
<b>Directional Control Valves</b>						109 ▶

▼ Pumps shown, from top to bottom: P-802, P-842, P-202, P-142



- Lightweight and compact design
- Durable glass-filled nylon reservoir and nylon encapsulated aluminum pump base for maximum corrosion resistance
- Two-speed operation on most models reduces handle strokes by as much as 78% over single speed pumps
- Lower handle effort to minimize operator fatigue
- Integral 4-way valve on P-842 for operation of double-acting cylinders
- Handle lock and lightweight construction for easy carrying
- Large oil capacities to power a wide range of cylinders or tools
- Non-conductive fiberglass handle for operator safety
- Internal pressure relief valve for overload protection

▼ P-392 in action with RSM-500 cylinders.



## Exclusively from Enerpac

**i Cylinder Matching Chart**  
For help in selecting the correct hand pump for your application, please refer to the Cylinder Matching Chart located in the “Yellow Pages”.  
**Page:** 244

**i Speed Chart**  
To determine how a specific pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the “Yellow Pages”.  
**Page:** 251

**Tank Kits**  
When a return-to-tank port is required, the Tank Kits provide a 7/16-20 port at the rear of the reservoir.

<b>PC-20</b>	Fits P-141, P-142
<b>PC-25</b>	Fits P-202, P-391, P-392


**LX-101 Hand Pump Oil**  
A medium viscosity oil specially formulated for hand pumps. Performs well in low temperatures and requires less pumping effort than standard Enerpac HF blue oil.  
**Page:** 122

Pump Type	Usable Oil Capacity (in <sup>3</sup> )	Model Number	Pressure Rating*		Oil Displacement per Stroke		Max. Handle Effort (lbs)
			(psi)		(in <sup>3</sup> )		
			1 <sup>st</sup> stage	2 <sup>nd</sup> stage	1 <sup>st</sup> stage	2 <sup>nd</sup> stage	
Single-speed	20	P-141	N/A	10,000	N/A	.055	72
	55	P-391	N/A	10,000	N/A	.151	85
Two-speed	20	P-142**	200	10,000	.221	.055	78
	55	P-202	200	10,000	.221	.055	63
	55	P-392**	200	10,000	.687	.151	93
	155	P-802	400	10,000	2.40	.151	95
	155	P-842***	400	10,000	2.40	.151	95

\* Contact Enerpac for applications where operating pressure is less than 10% of pressure rating.  
\*\* Available as set, see note on top of next page.  
\*\*\* For use with double-acting cylinders.



# Lightweight Hand Pumps



**Pump and Cylinder Sets**  
Pumps marked with an \*\* are available as sets (pump, cylinder, gauge, couplers and hose) for your ordering convenience.

Page: 58

## P Series



Reservoir Capacity:  
**20-155 in<sup>3</sup>**

Flow at Rated Pressure:  
**.055-.15 in<sup>3</sup>/stroke**

Maximum Operating Pressure:  
**10,000 psi**

### Hoses



Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 118

### Gauges




Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 117


### Aluminum Reservoir




For applications where composite reservoirs may not be suitable, the P-392AL utilizes an extruded aluminum reservoir. Also included is a second handle for two-hand use. Contact Enerpac for details.

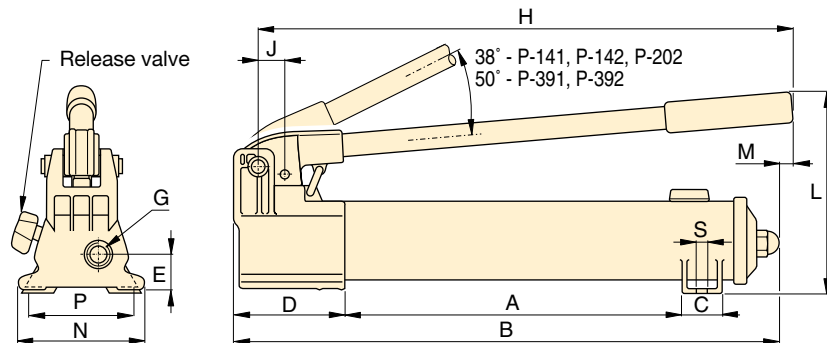

P-141, P-142, P-202, P-391, P-392

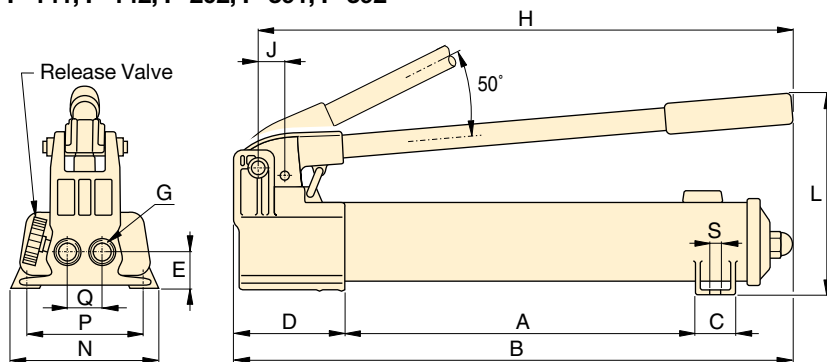

P-802

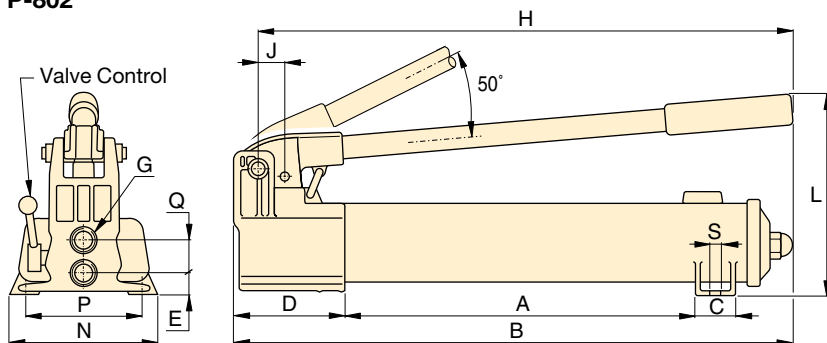

P-842

Piston Stroke	Dimensions (in)															Weight (lbs)	Model Number
	(in)	A	B	C	D	E	G	H	J	L	M	N	P	Q	S		
.50	7.31	13.25	1.13	3.37	1.13	1/4"-18 NPTF	12.56	.75	5.63	-	3.75	3.25	-	.28	5.3	P-141	
1.00	13.56	21.00	1.44	3.93	1.31	3/8"-18 NPTF	20.56	1.19	7.00	.63	4.75	-	-	-	9.0	P-391	
.50	7.31	13.25	1.13	3.37	1.13	1/4"-18 NPTF	12.56	.75	5.63	-	3.75	3.25	-	.28	5.3	P-142**	
.50	13.56	20.06	1.44	3.37	1.13	1/4"-18 NPTF	15.75	.75	5.69	.63	3.75	-	-	-	7.5	P-202	
1.00	13.56	21.00	1.44	3.93	1.31	3/8"-18 NPTF	20.56	1.19	7.00	.63	4.75	4.75	-	-	9.0	P-392**	
1.00	13.30	21.75	1.78	5.25	1.39	3/8"-18 NPTF	20.75	2.19	9.00	-	7.12	4.75	1.40	.41	18.0	P-802	
1.00	13.30	21.75	1.78	5.25	.81	3/8"-18 NPTF	20.75	2.19	9.00	-	7.12	4.75	1.44	.41	22.0	P-842**	

▼ Shown from left to right: P-462, P-84, P-801, P-77, P-80, P-39



- Two-speed operation for reduced operator fatigue (except P-39)
- 4-way valving on the P-84 and P-464 for operation of double-acting cylinders
- External load release valve on remaining models for single-acting cylinder operation
- Internal pressure relief valve for overload protection
- Large oil capacity to power a wide range of cylinders or tools

▼ In the absence of a power supply, the P-80 Hand Pump offers a powerful solution.



## The Solution for Tough Jobs



### Two Speed

Recommended for applications where cylinder plunger must advance rapidly to contact load, and applications where greater oil capacities are required, such as multiple cylinder hook-ups.



### Foot Pump Conversion Kits

Convert your P-39 to foot power with the PC-10 Kit. Includes instructions for easy conversion.



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 117



### 4-Way Control Valve

P-84 and P-464 feature a manual 4-way control valve, designed for use with one double-acting or two single-acting cylinders. For system set-up information:

Page: 247

Pump Type	Usable Oil Capacity (in <sup>3</sup> )	Model Number	Pressure Rating*		Oil Displacement per Stroke (in <sup>3</sup> )		Max. Handle Effort (lbs)
			1 <sup>st</sup> stage	2 <sup>nd</sup> stage	1 <sup>st</sup> stage	2 <sup>nd</sup> stage	
Single	40	P-39	N/C	10,000	N/C	.16	111
Two-speed	47	P-77	200	10,000	.97	.15	94
	134	P-80**	350	10,000	.99	.15	104
	249	P-801	350	10,000	.99	.15	104
	134	P-84***	350	10,000	.99	.15	104
	453	P-462	200	10,000	7.69	.29	110
	453	P-464***	200	10,000	7.69	.29	110

\* Contact Enerpac for applications where operating pressure is less than 10% of pressure rating.

\*\* Available as a set, see note on next page.

\*\*\* For use with double-acting cylinders.

# Steel Hand Pumps


## P Series




Reservoir Capacity:  
**40-453 in<sup>3</sup>**

Flow at Rated Pressure:  
**.15-.29 in<sup>3</sup>/stroke**


Maximum Operating Pressure:  
**10,000 psi**

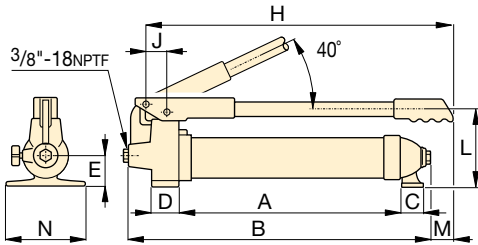


**P-39, P-77**

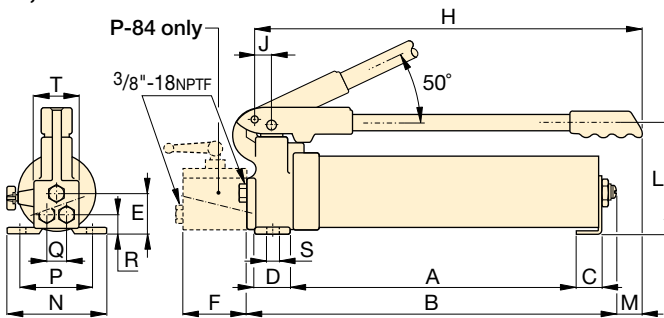

**P-80, P-801, P-84**

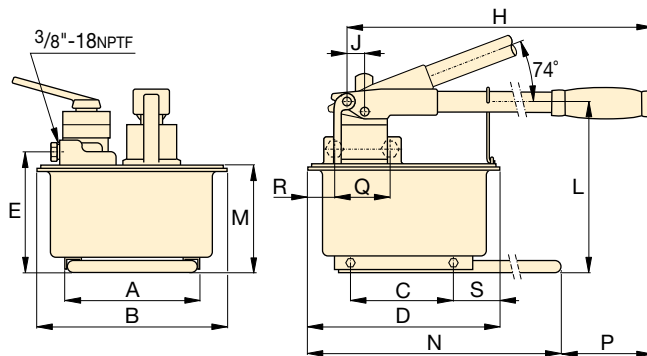

**P-462, P-464**

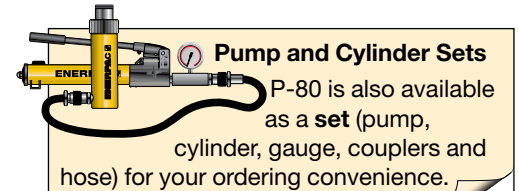

Page: 58



### Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: 251



### Cylinder Matching Chart

For help in selecting the correct hand pump for your application, please refer to the Cylinder Matching Chart located in the "Yellow Pages."

Page: 244

Piston Stroke	Dimensions (in)																	Weight (lbs)	Model Number
	(in)	A	B	C	D	E	F	H	J	L	M	N	P	Q	R	S	T		
.81	15.50	20.47	1.28	1.50	1.25	-	18.25	1.18	4.69	2.56	5.25	-	-	-	-	-	-	13	P-39
1.00	16.46	20.67	1.30	1.57	2.04	-	22.04	1.34	4.57	1.97	4.72	-	-	-	-	-	-	15	P-77
1.00	16.75	21.22	1.00	1.75	2.13	-	20.75	1.14	6.88	.75	5.75	4.76	-	.83	.31	-	-	24	P-80**
1.00	25.94	30.78	1.00	1.75	2.13	-	30.43	1.14	6.88	-	5.75	4.76	-	.83	.31	-	-	31	P-801
1.00	16.75	21.22	1.00	1.75	-	2.52	20.75	1.14	6.88	.75	5.75	4.76	1.50	1.69	.31	2.64	-	29	P-84***
1.50	8.25	12.13	6.42	12.63	7.68	-	26.44	.98	10.63	6.89	25.6	3.63	-	-	3.13	-	-	61	P-462
1.50	8.35	12.13	6.42	12.63	7.68	-	26.44	.98	10.63	6.89	25.6	3.63	3.50	2.68	3.13	-	-	61	P-464***

▼ Shown from left to right: P-25, P-51, P-18



## When Less Than 10,000 psi is All You Need

- P-25 and P-50 pump oil in both forward and reverse handle movement improving overall efficiency, ideal when mounting space is restricted
- External load-release valve
- Internal pressure-relief valve for overload protection
- P-51 can be operated in horizontal and vertical position with pump head and oil outlet facing downwards



### LX-101 Hand Pump Oil

A medium viscosity oil specially formulated for hand pumps. Performs well in low temperatures and requires less pumping effort than standard Enerpac HF blue oil.

Page: 122



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 117

▼ P-18 hand pump used for locking the rotating table for marble polishing.



Pump Type	Usable Oil Capacity (in <sup>3</sup> )	Model Number	Pressure Rating (psi)	Oil Displacement per Stroke (in <sup>3</sup> )	Max. Handle Effort (lbs)
Single-speed	18	P-18	2,850	0.16	57
	200	P-25	2,500	0.58	60
	200	P-50	5,000	0.29	60
	50	P-51	3,000	0.25	61

# Low Pressure Hand Pumps

## P Series



Reservoir Capacity:


**18-200 in<sup>3</sup>**

Flow at Rated Pressure:


**.16-.58 in<sup>3</sup>/stroke**

Maximum Operating Pressure:


**2,500-5,000 psi**

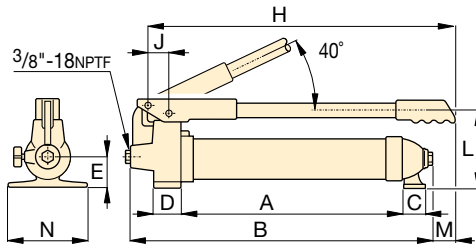

**P-18**

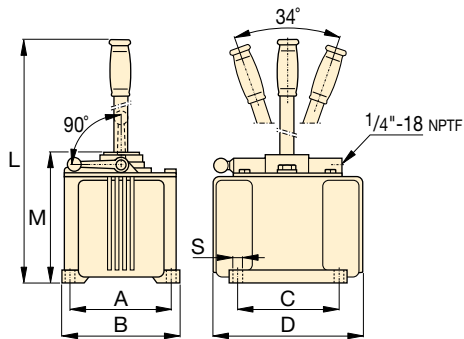

**P-25, P-50**

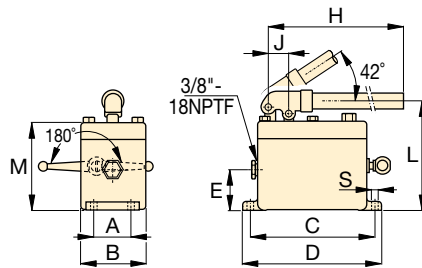

**P-51**

*P-51 hand pumps used with RC-series cylinders to keep wooden layers under pressure during lamination of plates.*



### Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: **118**



Piston Stroke	Dimensions (in)																Weight (lbs)	Model Number	
	(in)	A	B	C	D	E	F	H	J	L	M	N	P	Q	R	S			T
.81	8.25	12.88	1.28	1.50	1.88	-	8.50	1.18	4.38	.51	5.25	-	-	-	-	-	-	11	<b>P-18</b>
1.50	6.00	6.82	6.00	9.43	-	-	-	-	26.94	7.88	-	-	-	-	-	.40	-	36	<b>P-25</b>
1.50	6.00	6.82	6.00	9.43	-	-	-	-	26.94	7.88	-	-	-	-	-	.40	-	37	<b>P-50</b>
1.00	2.06	3.63	7.12	7.88	2.25	-	24.00	1.16	6.31	5.06	-	-	-	-	.34	-	12	<b>P-51</b>	

# Lightweight Hydraulic Foot Pump

▼ Shown: **P-392FP**



- **Robust, durable and compact**
  - Steel frame for maximum stability
  - Steel pumping handle
  - Aluminium reservoir
- **Foot pedal lock and lightweight construction for portability**
- **Two-speed operation reduces foot pedal strokes**
- **Large foot-pad release valve for controlling load descent**
- **Internal pressure relief valve for overload protection**

▼ *P-392FP offers the advantage of hands free operation to handle and control the tool or cylinder.*



## P Series

Flow at Rated Pressure:


**.15 in<sup>3</sup>/stroke**

Reservoir Capacity:

**38 in<sup>3</sup>**


Maximum Operating Pressure:

**10,000 psi**




**Pump and Cylinder sets**  
The P-392FP is available as **sets** (pump, cylinder, gauge, couplers and hose) for your ordering convenience.

Page: **58**



**Hoses**  
Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: **118**

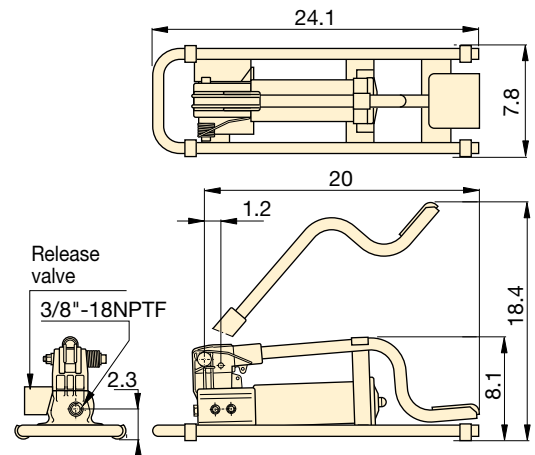

Usable Oil Capacity (in <sup>3</sup> )	Model Number	Pressure Rating (psi)		Oil Displacement per Stroke (in <sup>3</sup> )		Max. Handle Effort (lbs)	Piston Stroke (in)	Weight (lbs)
		1st stage	2nd stage	1st stage	2nd stage			
38	<b>P-392FP</b> *	200	10,000	.687	.151	125	1	16

\* Available as set, see note on this page.

# Multifluid Hand Pumps

▼ Shown: **MP-110**



- Superior corrosion resistance
- Impregnated aluminium anodized pump housing with stainless steel internal pumping components
- Standard Nitrile seals – excellent for demineralized water, oil/water emulsions, water glycols, mineral oils, hydraulic fluids
- Custom EPDM seals available for use with Skydrol® or brake fluids
- Two speed pumps up to 14,500 psi pressure
- Externally adjustable pressure relief valve
- 1/4" NPTF gauge port

▼ *MP-Series pumps are ideal for testing and filling applications.*



## MP Series

Reservoir Capacity:

**2 gal. (optional)**

Flow at Rated Pressure:

**.12-1.28 in<sup>3</sup>/stroke**


Maximum Operating Pressure:

**1,500-14,500 psi**




### Optional Reservoir Kit

The 2 gallon reservoir kit **MP-10T** includes tank with skid frame, top plate with reservoir seal, suction pipe and mounting bolts. Useable oil capacity is 1.5 gal.

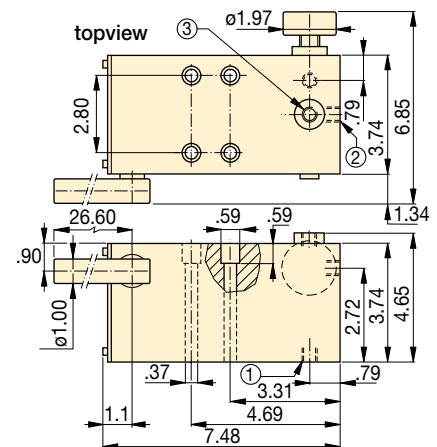

**MP-110, 350, 700, 1000**

- ① Suction / Tank return port 3/8"-18 NPTF
- ② Pressure port 3/8"-18 NPTF
- ③ Gauge port 1/4"-18 NPTF

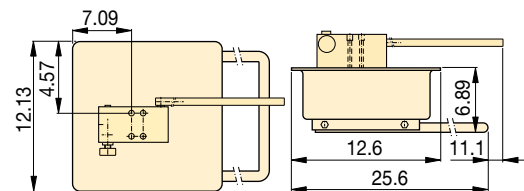

**MP-10T**

Pump Type	Usable Oil Capacity (in <sup>3</sup> )	Model Number	Pressure Rating (psi)		Oil Displacement per Stroke (in <sup>3</sup> )		Max. Handle Effort (lbs)	Piston Stroke (in)	Weight (lbs)
			1st stage	2nd stage	1st stage	2nd stage			
Two Speed	*	<b>MP-110</b>	500	1500	3.2	1.28	99	1.04	14.5
	*	<b>MP-350</b>	500	5000	3.2	.43	99	1.04	14.5
	*	<b>MP-700</b>	500	10,000	3.2	.18	99	1.04	14.5
	*	<b>MP-1000</b>	500	14,500	3.2	.12	99	1.04	14.5

Note: MP-Pump includes .060 in. thick gasket for reservoir mounting.

\* MP-Series pumps require the use of an external reservoir.

▼ Shown from left to right: 11-100, P-2282



## Ultra-High Pressure up to 40,000 psi



### 2-Way Shut-Off Valve 72-750

For 40,000 psi applications requiring a shut-off valve or gauge snubber. Made of 318 Stainless Steel and utilizing .38 inch cone fittings, it is the perfect selection for use with your Ultra-High Pressure Hand Pump.




### Test System Gauges


Ideal for monitoring pressure in your hydraulic circuit, Test System Gauges, such as the T-6010L, are available with cone threads or NPTF threads and in a variety of pressure ranges.

Page: 128

- Two-speed operation on the P-2282 allows for faster fill, reducing cycle times for many testing applications
- 303 Stainless steel construction on the 11-100 and 11-400 models enable use with many different fluids, such as distilled water, alcohol, diesters, silicones, soluble oils and petroleum
- Large release knob for improved control of pressure release
- Outlet ports are 3/4"-16 cone for 40,000 psi rating

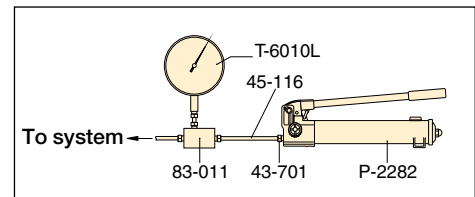


▲ Typical Test System

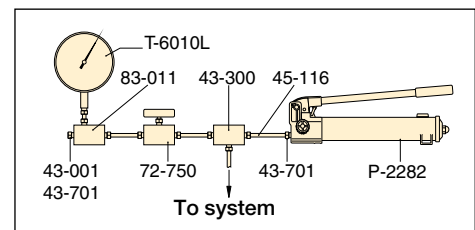

▲ Test System with Gauge and Snubber

### Cone Seal

Stainless Steel High Pressure fittings seal on a "cone" surface and do not require pipe sealer. The Gland Nut holds the sleeve and tubing tight against the cone surface to provide a 40,000 psi seal.

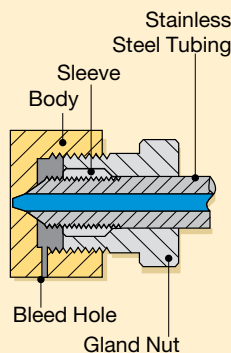

Pump Type	Usable Oil Capacity (in <sup>3</sup> )	Model Number	Pressure Rating* (psi)		Oil Displacement per Stroke (in <sup>3</sup> )		Max. Handle Effort (lbs)
			1st stage	2nd stage	1st stage	2nd stage	
Two-speed	60	P-2282	200	40,000	.99	.037	106
Single-speed	45	11-100	N/C	10,000	N/C	.152	120
	45	11-400	N/C	40,000	N/C	.038	120

\* Contact Enerpac for applications where operating pressure is less than 10% of pressure rating.



# Ultra-High Pressure Hand Pumps

## ▼ Optional Ultra-High Pressure Fittings and Tubing

Description	Connection	Model No.
<b>40,000 psi</b>		
Gland Nut Plug	.38" cone	43-001
Elbow	.38" cone	43-200
Tee	.38" cone	43-300
Gauge Tee	.38" cone side/ .25" cone gauge port	43-301
Gauge Adaptor	.38" cone side/ .25" cone gauge port	83-011
Coupling	.38" cone	43-400
Cross	.38" cone	43-600
Gland Nut with Sleeve	.38" cone	43-701
Gauge Connector	.25" cone	43-704
Tubing	4" tube, O.D. .38" * 8" tube, O.D. .38" * 12" tube, O.D. .38" *	45-116 45-126 45-136
<b>10,000 psi only</b>		
Adaptor	.38" F cone to 1/4" M NPTF	41-146
	.38" F cone to 3/8" M NPTF	41-166
Adaptor	.38" F cone to 1/4" F NPTF	41-246
	.38" F cone to 3/8" F NPTF	41-266
Adaptor	.38" M cone to 3/8" F NPTF	41-366

Note: .25" cone fittings use 9/16"-18 threads, 3/8" cone fittings use 3/4"-16 threads.

\* Actual tubing lengths are .75" less than nominal size shown. These dimensions make distance between centers of valves and fittings multiples of 4" spaces.

## P/11 Series



Reservoir Capacity:

**45-60 in<sup>3</sup>**

Flow at Rated Pressure:

**.037-.152 in<sup>3</sup>/stroke**

Maximum Operating Pressure:


**10,000-40,000 psi**




### Stainless Steel Construction

Ultra-high Pressure Fittings feature all stainless steel construction except adaptor 41-366, which features nickel plated carbon steel construction.

Optional T-Series gauge and fitting

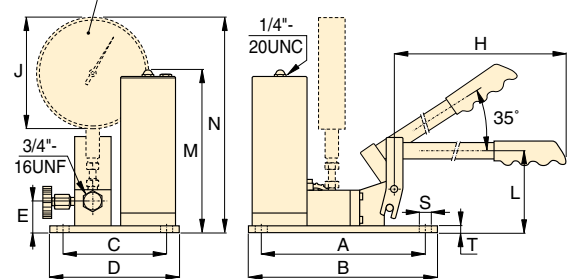

11-100, 11-400

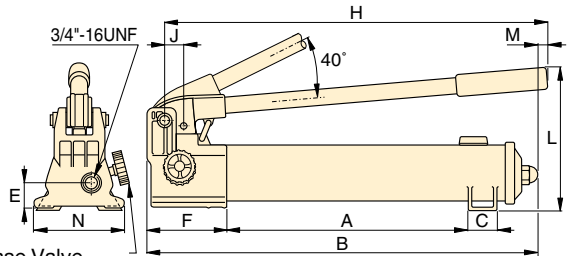

Release Valve  
P-2282

Piston Stroke	Dimensions (in)														Weight (lbs)	Model Number
	A	B	C	D	E	F	H	J	L	M	N	S	T			
1.00	13.56	22.00	1.40	-	1.24	5.25	20.75	1.16	9.00	.28	4.74	-	-	14	P-2282	
.78	9.45	10.50	5.98	7.00	1.77	-	25.00	6.41	4.50	9.33	12.38	.31	.37	22	11-100	
.78	9.45	10.50	5.98	7.00	1.77	-	25.00	6.41	4.50	9.33	12.38	.31	.37	22	11-400	

▼ Shown: BP-122



## Cordless Hydraulic Power



### 28-Volt Lithium-Ion Battery

Heavy-duty construction with easy to operate latches. Fuel gauge LEDs show remaining charge.

Number of illuminated LEDs	Charge Remaining
4 ■■■■	100%-78%
3 ■■■	77%-56%
2 ■■	55%-34%
1 ■	33%-10%
Flashing	less than 10%

- Lightweight, compact design with integrated handle for maximum portability
- Dual power selection and variable speed for preferred flow and precise control
- Heavy-duty 28 volt Lithium-Ion battery pack delivers constant fade-free power
- Immediate charging after use — a quick one hour charge
- Pump model includes two 3.0 amp-hour battery packs and quick charger



### G2535L Gauge

Minimize the risk of overloading and ensure long dependable service from your cordless pump.

Page: 



Battery packs contain no cadmium, so they are environmentally friendly. Enerpac encourages recycling.



◀ Take the battery pump anywhere without any power cords or air hoses.

# Battery Powered Hydraulic Pump



## Battery Powered Pump


The BP cordless pump is best suited for small to medium size cylinders or hydraulic tools, or wherever portable cordless hydraulic power is needed.

Powerful for everyday use, its lightweight and ergonomic design is ideal for both remote job sites or wherever a cord gets in the way.

The Lithium-Ion battery operates at peak performance under extreme conditions to get more work completed. The battery pack provides the power to run the cordless pump at maximum pressure for over six minutes. Numerous applications are easily and safely performed using the cordless pump powered by the Lithium-Ion battery pack.\*

- 130 cuts of 3/8-inch reinforcing bar using the WHC750 Cutter
- 75 lifts with a WR5 Spreader
- Safely remove thirty 1-inch nuts using the NC3241 Nut Splitter
- Lift loads multiple times using 5–100 ton jacks

\*Actual number of cycles will depend on condition of tool, battery, and ambient conditions.

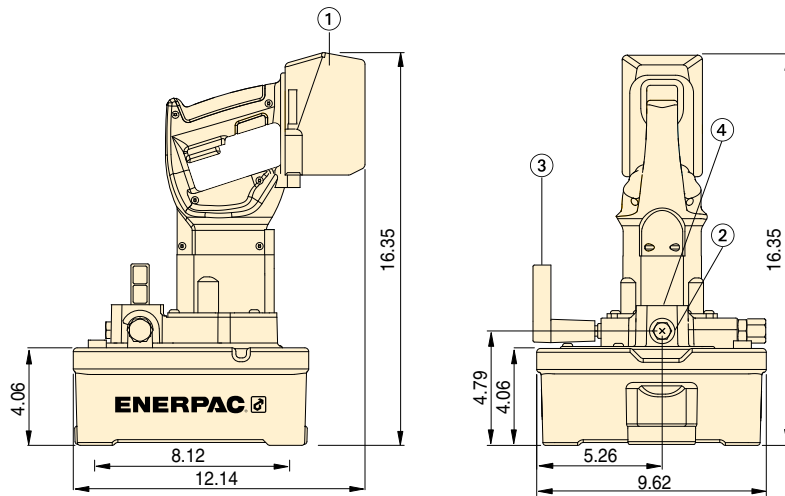

- ① 28-Volt Lithium-Ion battery
- ② 3/8"-18 NPTF oil outlet
- ③ 3-way, 2-position valve
- ④ 1/4"-18 NPTF gauge port

### SELECTION CHART

Usable Oil Capacity (gal)	Model Number	Output Flow Rate (in <sup>3</sup> /min)		Valve Function	Charger Voltage (VAC)	Weight (lbs)
		200 psi	10,000 psi			
0.5	<b>BP-122</b>	120	15	3-way, 2-pos.	115	21.2
1.0	<b>BP-124</b>	120	15	3-way, 2-pos.	115	24.0
0.5	<b>BP-122E</b>	120	15	3-way, 2-pos.	230	21.2
1.0	<b>BP-124E</b>	120	15	3-way, 2-pos.	230	24.0


## BP Series



Reservoir Capacity:  
**.5-1.0 gal.**

Flow at Rated Pressure:  
**15 in<sup>3</sup>/min.**

Maximum Operating Pressure:  
**10,000 psi**

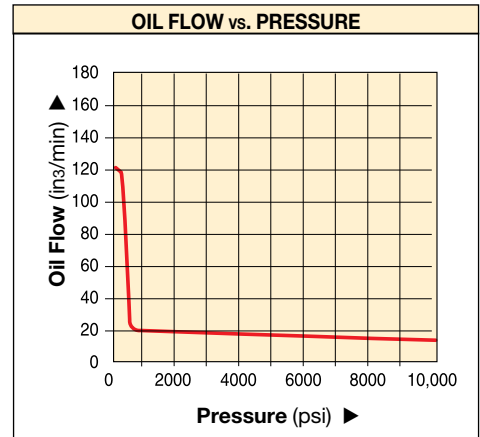

▼ Power and simplicity for the toughest jobs.



▼ Shown: PUJ-1200B



## Heavy on Performance, Light on Weight

- Lightweight and compact design, 22 to 41 lbs
- Large easy-carry handle for maximum portability
- Two-speed operation reduces cycle times for improved productivity
- 115 VAC 50/60-cycle universal motor will operate on voltages as low as 60 volts
- 24 VAC remote motor control, 10-ft length for operator safety
- Starts under full load
- High strength molded shroud with integral handle, protects motor from contamination and damage
- Designed for intermittent duty cycle



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. For use with the Economy pump the G-2535L gauge and GA-3 gauge adaptor are suggested.

For a full range of gauges, please refer to the System Components section.

Page: 117



### Speed Chart

To determine how the 0.5 hp Economy pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: 251

▼ An Economy pump PUJ-1200B is used with an RC-2514 to reposition a stamping die to simplify maintenance.



Used with Cylinder	Usable Oil Capacity (gal)	Model Number*	Pressure Rating	
			(psi)	
			1 <sup>st</sup> stage	2 <sup>nd</sup> stage
Single-acting	.50	PUD-1100B	200	10,000
	1.00	PUD-1101B	200	10,000
	.50	PUD-1300B	200	10,000
	1.00	PUD-1301B	200	10,000
	.50	PUJ-1200B	200	10,000
	1.00	PUJ-1201B	200	10,000
Double-acting	.50	PUJ-1400B	200	10,000
	1.00	PUJ-1401B	200	10,000



## About the Economy Pump

The Economy pump is best suited to power small to medium size cylinders

or hydraulic tools. Its lightweight and compact design makes it ideal for applications which require easy transport of the pump.

The Universal motor works well on long extension cords or generator-driven electrical power supplies.

For further application assistance refer to the "Yellow Pages".

### PUD-1100 Series

- Provides advance/auto-retract of single-acting cylinders
- Ideal for punching applications

- For applications not requiring load holding
- 10-ft pendant controls motor and valve operation

### PUD-1300 Series

- Provides advance/hold/retract of single-acting cylinders
- 10-foot pendant controls motor and valve operation
- Ideal for applications requiring remote valve operation.

### PUJ-Series

- Available with 3- and 4-way valves for single- or double-acting cylinders
- 10-ft pendant controls the motor operation
- Manual valves provide advance/retract tool control



## PU Series





Reservoir Capacity:  
**0.5-1.0 gal.**

Flow at Rated Pressure:  
**20 in<sup>3</sup>/min.**

Motor Size:  
**.5 hp**

Maximum Operating Pressure:  
**10,000 psi**

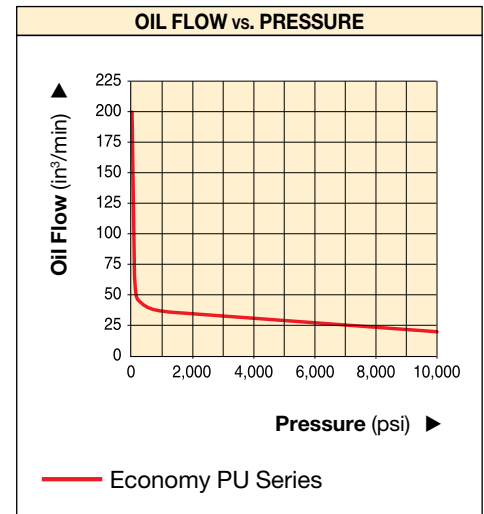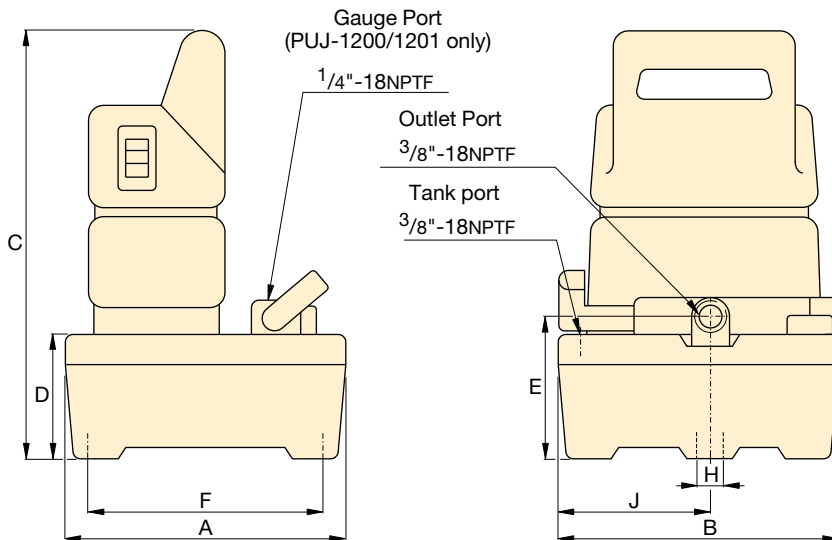

Output Flow Rate		Valve Type	Current Draw	Motor Voltage	Sound Level	Dimensions (in)								Weight	Model Number*
(in <sup>3</sup> /min)						A	B	C	D	E	F	H	J		
1 <sup>st</sup> stage	2 <sup>nd</sup> stage	(Amps)	(VAC)	(dBA)									(lbs)		
200	20	Dump **	9.5	115	85	9.62	9.62	14.25	4.00	4.72	8.00	.40	5.25	26	PUD-1100B
200	20		9.5	115	85	14.50	12.18	14.72	4.15	5.12	12.74	.40	5.62	35	PUD-1101B
200	20	Dump and Hold	9.5	115	85	9.62	9.62	14.25	4.00	4.72	8.00	.40	5.25	26	PUD-1300B
200	20		9.5	115	85	14.50	12.18	14.72	4.15	5.12	12.74	.40	5.62	35	PUD-1301B
200	20	3-way, 2-pos.	9.5	115	85	9.62	9.62	14.25	4.00	4.72	8.00	.40	5.25	24	PUJ-1200B
200	20		9.5	115	85	14.50	12.18	14.72	4.15	5.12	12.74	.40	5.62	31	PUJ-1201B
200	20	4-way, 3-pos.	9.5	115	85	9.62	9.62	14.25	4.00	4.72	8.00	.40	5.25	29	PUJ-1400B
200	20		9.5	115	85	14.50	12.18	14.72	4.15	5.12	12.74	.40	5.62	36	PUJ-1401B

\* For 230 volt applications replace "B" suffix with "E".

\*\* Electric dump valve for auto-retract of cylinders.

▼ Shown: PEJ-1401B



- Two-speed operation reduces cycle times for improved productivity
- Powerful .5 hp induction motor is submerged in the oil reservoir to run cooler, protect the motor, simplify the pump interface, save space and reduce noise
- Large 1.5 gallon reservoir allows operation of a wide range of cylinders
- 24 VDC remote pendant control on certain models for safer operation
- Externally adjustable relief valve allows control of operating pressure without opening the pump
- 40-micron internal return line filter keeps oil clean, promoting longer pump life
- Full length side tube for easy monitoring of oil level



◀ The Remote Jog model of the Submerged Pump simplifies repair on this construction crane.

## Best Performance for Mid-Range Cylinders and Tools

### ▼ SELECTION CHART

For more technical information see next page.

5 BASIC PUMP TYPES	
Select the model that suits your application. For special requirements see <b>page 77</b> or contact your Enerpac office.	
<b>PED-Series: with Dump Valve</b> <ul style="list-style-type: none"> <li>• Ideal for punching, crimping and cutting</li> <li>• For use when load holding is not required</li> <li>• Control pendant with 10 ft. cord controls valve and motor</li> </ul>	
<b>PEM-Series: with Manual Valve</b> <ul style="list-style-type: none"> <li>• Ideal choice for most applications</li> <li>• Manual valve control, for both single-acting and double-acting applications</li> <li>• Manual motor control</li> </ul>	
<b>PER-Series: with Solenoid Valve</b> <ul style="list-style-type: none"> <li>• Ideal for production and lifting</li> <li>• All valves are 3-position for Advance/Hold/Retract</li> <li>• Control pendant with 10 ft. cord for remote valve operation</li> </ul>	
<b>PEJ-Series: with Remote Jog</b> <ul style="list-style-type: none"> <li>• For light production and lifting applications</li> <li>• Manual valve control for single-acting or double-acting cylinders</li> <li>• Control pendant with 10 ft. cord for remote motor operation</li> </ul>	
<b>PES-Series: with Pressure Switch</b> <ul style="list-style-type: none"> <li>• Designed for maintaining pressure applications, such as clamping, workholding and testing</li> <li>• All versions include manual valves for directional control</li> </ul>	

\* Contact Enerpac for details on VM style valves.

# Submerged Electric Pumps



## Submerged Pump Application

The Submerged pump is best suited to power small to medium size cylinders or hydraulic tools, or whenever a quiet, intermittent duty cycle is needed. With its low sound level and the addition of the optional oil cooler, the Submerged pump is suited to light production work as well.

Its lightweight and compact design also make it ideal for applications which require some transport of the pump.

For further application assistance see the "Yellow Pages" or contact your local Enerpac office.

Page: 244

## PE Series



Reservoir Capacity:

**1.5 gal.**

Flow at Rated Pressure:

**20 in<sup>3</sup>/min.**

Motor Size:

**.5 hp**

Maximum Operating Pressure:

**10,000 psi**

Pump Type	Used with Cylinder	Valve Function	Valve Type*	Usable Oil Capacity (gal)	Model Number 115 VAC, 1 ph	Weight (lbs)
	Single-acting	Advance/Retract	Dump	1.5	<b>PED-1101B</b>	55
	Single-acting	Advance/Retract	Manual VMP 10000D	1.5	<b>PEM-1201B</b>	53
	Single-acting	Advance/Hold/Retract	Manual VMF 10000D	1.5	<b>PEM-1301B</b>	53
	Double-acting	Advance/Hold/Retract	Manual VMC 10000D	1.5	<b>PEM-1401B</b>	53
	Single-acting	Advance/Hold/Retract	Solenoid (VEF-15500D)	1.5	<b>PER-1301B</b>	65
	Double-acting	Advance/Hold/Retract	Solenoid (VEC-15600D)	1.5	<b>PER-1401B</b>	65
	Single-acting	Advance/Retract	Manual VMP 10000D	1.5	<b>PEJ-1201B</b>	55
	Single-acting	Advance/Hold/Retract	Manual VMF 10000D	1.5	<b>PEJ-1301B</b>	55
	Double-acting	Advance/Hold/Retract	Manual VMC 10000D	1.5	<b>PEJ-1401B</b>	55
	Single-acting	Advance/Retract	Manual VMP 10000D	1.5	<b>PES-1201B</b>	62
	Double-acting	Advance/Hold/Retract	Manual VMC 10000D	1.5	<b>PES-1401B</b>	62


# PE-Series, Submerged Electric Pumps

◀ For full features see page 76.

Submerged Pump Performance							
Motor Size	Pressure Rating		Output Flow Rate**		Motor Electrical Specifications*	Sound Level	Relief Valve Adjustment Range
	(psi)		(in <sup>3</sup> /min)				
	(hp)	1 <sup>st</sup> stage	2 <sup>nd</sup> stage	1 <sup>st</sup> stage			
0.5	1,000	10,000	150	20	13 @ 115-1-50/60 6.75 @ 230-1-50/60	62-70	1,000-10,000


\* At bypass and maximum pressure. See matrix footnotes on next page for Hz limitations.

\*\* All flow data at 60 Hz, 50 Hz data will be 5/6 th this number.

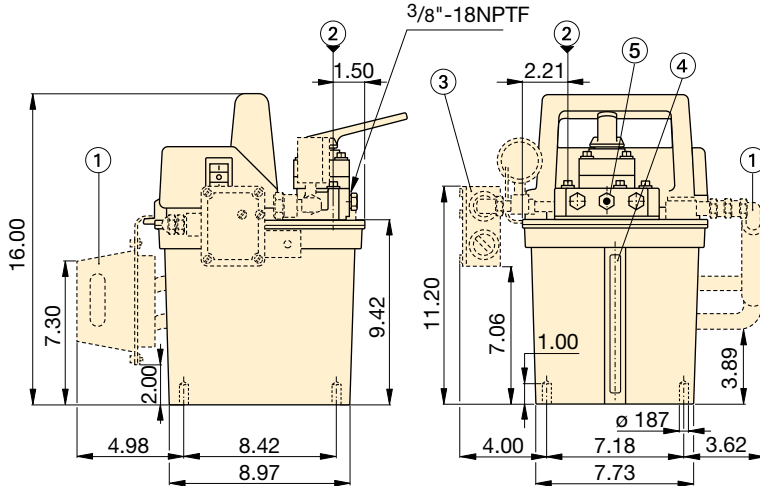

Dimensions shown in inches.

- ① Heat Exchanger (optional for all models)
- ② Fill Port
- ③ Pressure Switch (PES-Series, optional for other models)
- ④ Oil Level Indicator
- ⑤ Adjustable Relief Valve

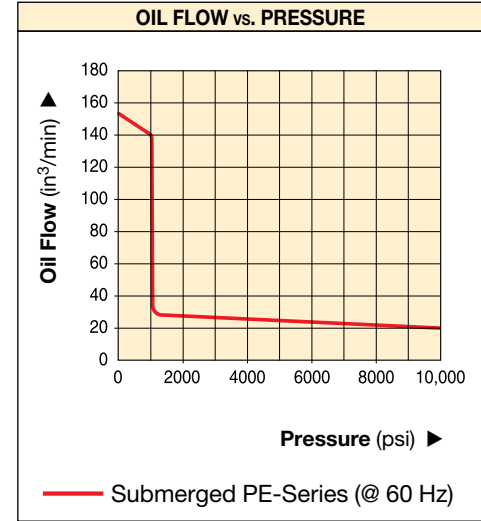

### Speed Chart

To determine how a submerged pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: 251



◀ This PED-1001B Submerged pump quickly and quietly powers a hydraulic nut cutter in this bucket maintenance application.



# Submerged Electric Pumps Ordering Matrix

## CUSTOM BUILD YOUR SUBMERGED PUMP

If the Submerged Pump that would best fit your application cannot be found in the chart on page 76, you can easily build your custom submerged pump here.

▼ This is how a Submerged Pump Model Number is built up:

<b>P</b>	<b>E</b>	<b>M</b>	<b>-</b>	<b>1</b>	<b>3</b>	<b>01</b>	<b>B</b>
<b>1</b>	<b>2</b>	<b>3</b>		<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>
<b>Product Type</b>	<b>Motor Type</b>	<b>Pump Type</b>		<b>Pump Series</b>	<b>Valve Type</b>	<b>Reservoir Size</b>	<b>Motor Voltage</b>

### 1 Product Type

**P** = Pump

### 2 Motor Type

**E** = Electric motor

### 3 Pump Type

**D** = Dump

**J** = Jog

**M** = Manual

**R** = Remote (Solenoid)<sup>1) 2)</sup>

**S** = Pressure switch

### 4 Pump Series

**1** = .5 hp, 10,000 psi

### 5 Valve Type

**0** = No valve (PER only)

**1** = Dump

**2** = 3-way, 2-position, normally open

**3** = 3-way, 3-position, tandem center

**4** = 4-way, 3-position, tandem center

**5** = Modular valve (PER only)

### 6 Reservoir Size

**01** = 1.5 gallon

### 7 Motor Voltage and Heat Exchanger

**B** = 115 V, 1 Ph, 60 Hz <sup>1)</sup>

**D** = 115 V, 1 Ph, 60 Hz <sup>1)</sup>

with heat exchanger

**E** = 230 V, 1 Ph, 50 Hz <sup>2)</sup>

**F** = 230 V, 1 Ph, 50 Hz <sup>2)</sup>

with heat exchanger

**I** = 230 V, 1 Ph, 60 Hz

<sup>1)</sup> Can also run at 50 Hz with manual valve

<sup>2)</sup> Can also run at 60 Hz with manual valve

## Ordering Example

### Model Number: PER-1301B

The PER-1301B is a .5 hp, 10,000 psi, submerged electric pump, with 1.5 gallon usable oil capacity, a 3-way, 3-position modular, remote solenoid valve and a 115 V, 1 Phase, 60 Hz motor.

## PE Series



Reservoir Capacity:

**1.5 gal.**

Flow at Rated Pressure:

**20 in<sup>3</sup>/min.**

Motor Size:

**.5 hp**

Maximum Operating Pressure:

**10,000 psi**



### Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: **118**



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: **117**



The **PER-1301B**, **PER-1401B**, **PER-1301D** and **PER-1401D** include a Modular (solenoid) Valve and pilot operating check.

Page: **114**

Introducing the *Z-Class* power pumps from Enerpac—pumps that run cooler, use less electricity and are easy to service.



Enerpac has used the latest metallurgical, bearing and seal technologies to produce a pump whose features and benefits far surpass the electric pumps that are available today. By reducing the number of moving parts, improving flow dynamics and decreasing friction, *Z-Class* pumps will stay on the job longer, require less energy to operate and when needed, have lower service costs.

*Z-Class* electric pumps from Enerpac—simply the best pump you will ever use.



**Z** Tough.  
Dependable.  
Innovative.  
**ZCLASS**

## Z-Class Pumping Element — The Heart of Your Hydraulic System

**Highly efficient design** provides increased flow rates, reduced heat generation and a decrease in power consumption. This means improved tool speed and increased service life—which results in higher productivity and lower operating costs.

**Heavy-duty bearings** extend pump life by reducing friction, reducing surface-loading and lowering bearing stresses.

**Pump cavity oil bath** extends pump life by reducing heat, improving lubrication and reducing wear.

**Self-priming, high-flow 1st stage pump** increases pump performance by super-charging the 2nd stage piston pump—improving oil flow in both hot and cold weather operation.

**Balanced rotating components reduce vibration** creating a smoother running pump—reducing wear, friction and sound levels.

**Replaceable piston check-valves** increase service life of major pump components.

**Ergonomic low-voltage pendant** features sealed switches and operates at 15 VCD for improved operator safety.

### Back-lit LCD on select Z-Class pumps

- pump usage information, hour and cycle counts
- low-voltage warning and recording
- offers self-test and diagnostic capabilities
- information displayed in 6 languages
- pressure read-out (when used with the optional pressure transducer)
- adjustable trigger pressure setting (when used with the optional pressure transducer)



### Z-Class factory installed options & accessories

Extensive list of accessories including heat exchanger, roll-bars, skid bar, pressure transducer, return line filter and level and temperature switches, allow complete pump control over a wide range of industrial applications.

### Z-Class electric pumps for your application

**Available in one flow range for universal motor and 4 flow ranges** for induction motor. Choose from single or two-stage models to provide the optimum cylinder and tool performance for almost any industrial application.

Pump Series	Motor Size	Flow @ 10,000 psi
ZU4	1.7 hp	60 in <sup>3</sup> /min
ZE3	1.0 hp	40 in <sup>3</sup> /min
ZE4	1.5 hp	60 in <sup>3</sup> /min
ZE5	3.0 hp	120 in <sup>3</sup> /min
ZE6	7.5 hp	200 in <sup>3</sup> /min

**i ZU4 Series Pump Applications**

- **Mobile:** when frequent pump transport is required and/or on remote locations
- **Universal motor:** 1-phase, runs well under poor voltage supply, using generator power supply or using long extension cord
- **Duty-cycle:** for intermittent applications
- **Cylinders and tools:** for medium to large size single- and double-acting applications and high speed.

**i ZE Series Pump Applications**

- **Stationary:** when pump remains in one location
- **Induction motor:** 1 and 3-phase for high cycle usage
- **Duty-cycle:** for heavy-duty, extended cycle application
- **Cylinders and tools:** for medium to large size single- and double-acting applications and high speed

▼ Shown from left to right: ZU4304MB, ZU4420SB-H, ZU4304PB-K



**Z** Tough.  
Dependable.  
Innovative.  
**CLASS**

- Features Z-Class high-efficiency pump design; higher oil flow and bypass pressure, cooler running and requires 18% less current draw than comparable pumps
- Powerful 1.7 hp universal electric motor provides high power-to-weight ratio and excellent low-voltage operating characteristics
- High-strength, molded composite shroud protects motor and electronics, while providing an ergonomic, non-conductive handle for easy transport
- Low-voltage pendant provides additional safety for the operator (remote control units)

#### Pro Series pump only

- LCD readout provides pressure and torque display and a number of diagnostic and readout capabilities never before offered on a portable electric pump
- AutoCycle feature provides continuous cycle operation of the torque wrench as long as the advance button is pressed (pump can be used with or without auto cycle feature)



◀ *Designed to be tough, the ZU4-Series with steel reservoirs will take the abuse of today's construction sites. The ZU4908JE is the ideal pump for post tensioning applications. For post tensioning tools see page 184.*

#### ▼ COMMON PUMP MODELS

For technical information and other options see next page.

BASIC PUMP TYPES	
Select the model that suits your application. For special requirements contact your Enerpac office.	
<b>Manual Valve</b> <ul style="list-style-type: none"> <li>• Ideal choice for most applications</li> <li>• Manual valve control, for single-acting or double-acting applications</li> <li>• Motor control on shroud</li> </ul>	
<b>Manual Valve with Pendant</b> <ul style="list-style-type: none"> <li>• For light production and lifting applications</li> <li>• Manual valve control for single-acting or double-acting cylinders</li> <li>• Low-voltage control pendant with 10-ft. cord for remote motor operation</li> </ul>	
<b>Dump Valve</b> <ul style="list-style-type: none"> <li>• Ideal for punching, crimping and cutting</li> <li>• For use when load-holding is not required</li> <li>• Low-voltage control pendant with 10-ft. cord controls valve and motor</li> </ul>	
<b>Solenoid Valve</b> <ul style="list-style-type: none"> <li>• Ideal for lifting applications and where remote control is required</li> <li>• Motor runs continuously on pumps with VE33 and VE43 valves. With VE32 valve, motor only runs during the advance function, while holding and retracting, the motor is off</li> <li>• Low-voltage control pendant with 10-ft. cord for remote motor and valve operation</li> </ul>	

# ZU-Series, Electric Pumps



## Z-Class – A Pump For Every Application

Patented Z-Class pump technology provides high by-pass pressures for increased productivity—important in applications using long hose runs and high pressure-drop circuits, like heavy lifting or certain double-acting tools.

Enerpac ZU4 Hydraulic Pumps are built to power small to large-sized cylinders or hydraulic tools, or wherever high-speed, intermittent duty, remote hydraulic power is needed.

### Pro Electric Pump

- Digital (LCD) display features a built-in hour meter and shows self-diagnostic, cycle-count and low voltage warning information.

Pressure can also be displayed when the pump is equipped with an optional pressure transducer.

### Standard Electric Pump

- For applications that do not require digital display features of the Premium Pump. Available in all manual or jog versions.

### Classic Electric Pump

- The *Classic* has traditional electro-mechanical components (transformers, relays and switches) in place of solid-state electronics. The *Classic* delivers durable, safe and efficient hydraulic power for demanding markets like construction, post-tensioning and foundation repair.



## ZU Series



Reservoir Capacity:

**1.0-10.0 gal.**

Flow at Rated Pressure:

**60 in<sup>3</sup>/min.**

Motor Size:

**1.7 hp**

Maximum Operating Pressure:

**10,000 psi**

Pump Type	Used with Cylinder		Valve Function			Valve Type <sup>2)</sup>	Pump Control	Usable Oil Capacity (gal)	Model Number 115 VAC <sup>3)</sup> 1 Phase			Pro Product Weight w/oil <sup>4)</sup> (lbs)
									Classic	STD Electric	Pro Electric	
	●		●		●	VM32	Manual	1.0	ZU4204RB	ZU4204MB	ZU4204LB	59
	●		●		●	VM32	Manual	2.0	ZU4208RB	ZU4208MB	ZU4208LB	69
	●		●	●	●	VM33	Manual	2.0	ZU4308RB	ZU4308MB	ZU4308LB	70
	●		●	●	●	VM33	Manual	5.0	ZU4320RB	ZU4320MB	ZU4320LB	109
		●	●	●	●	VM43	Manual	2.0	ZU4408RB	ZU4408MB	ZU4408LB	70
		●	●	●	●	VM43	Manual	5.0	ZU4420RB	ZU4420MB	ZU4420LB	109
	●		●		●	VM32	Remote (Man.)	1.0	ZU4204PB	ZU4204JB	ZU4204KB	60
	●		●		●	VM32	Remote (Man.)	2.0	ZU4208PB	ZU4208JB	ZU4208KB	70
	●		●		●	VM32	Remote (Man.)	5.0	ZU4220PB	ZU4220JB	ZU4220KB	109
	●		●	●	●	VM33	Remote (Man.)	2.0	ZU4308PB	ZU4308JB	ZU4308KB	71
		●	●	●	●	VM43	Remote (Man.)	2.0	ZU4408PB	ZU4408JB	ZU4408KB	71
		●	●	●	●	VM43	Remote (Man.)	5.0	ZU4420PB	ZU4420JB	ZU4420KB	110
	●		●		●	VE32D	Remote	1.0	N/A	N/A	ZU4104DB	63
	●		●		●	VE32D	Remote	2.0	N/A	N/A	ZU4108DB	73
	●		●		●	VE32D	Remote	5.0	N/A	N/A	ZU4120DB	112
						-	-	-	-	-	-	-
						-	-	-	-	-	-	-
						-	-	-	-	-	-	-
	●		●		●	VE32	Remote	1.0	N/A	N/A	ZU4204SB	63
	●		●		●	VE32	Remote	2.0	N/A	N/A	ZU4208SB	73
	●		●	●	●	VE33	Remote	2.0	N/A	N/A	ZU4308SB	85
		●	●	●	●	VE43	Remote	2.0	N/A	N/A	ZU4408SB	85
		●	●	●	●	VE43	Remote	5.0	N/A	N/A	ZU4420SB	124
						-	-	-	-	-	-	-
						-	-	-	-	-	-	-
						-	-	-	-	-	-	-

<sup>1)</sup> All models meet CE safety requirements. "E" voltage versions also meet all requirements of the European EMC-Directive.


<sup>2)</sup> See valves section for technical information on valve types.

<sup>3)</sup> See custom order matrix for other voltage options.




<sup>4)</sup> Subtract 3 lbs. for STD Electric models.

# ZU Series, Specifications and Dimensions




ZU4 Performance							
Motor Size	Output Flow Rate (in <sup>3</sup> /min)				Motor Electrical Specification (volts-ph-Hz)	Sound Level (dBA)	Relief Valve Adjustment Range (psi)
	(hp)	100 psi	700 psi	5000 psi			
1.7	700	535	76	60	115-1-50/60 230-1-50/60	85-90	2,000-10,000

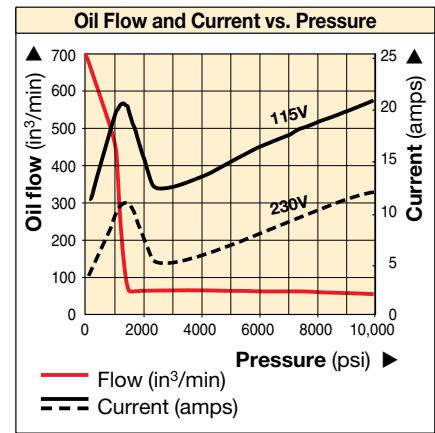

## ZU-4 Series with 1 and 2 gallon reservoirs

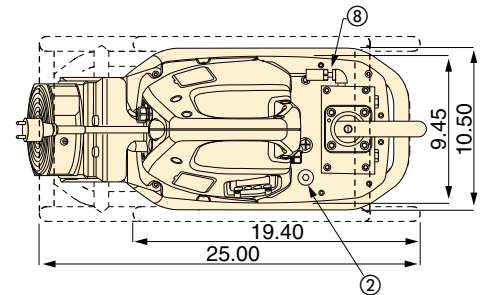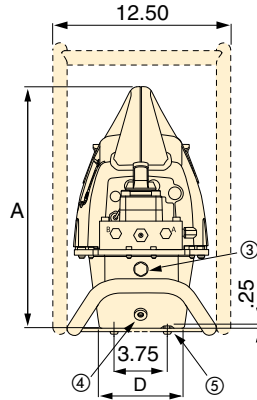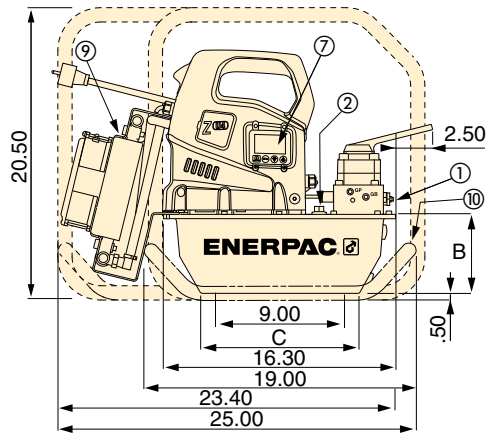

## ZU-4 Series with 2.5, 5.0 and 10.0 gallon reservoirs (Left view shown without side handle)

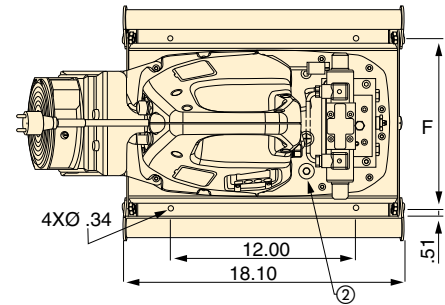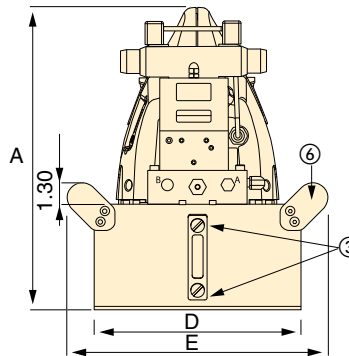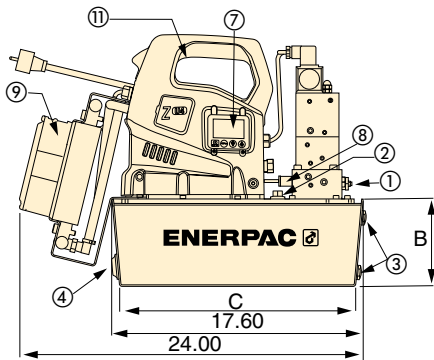

- ① User adjustable relief valve
- ② Oil fill port, SAE#10
- ③ Oil level sight gauge
- ④ Oil Drain, 1/2" NPTF
- ⑤ M8 x 1.25
- ⑥ Handles on all 2.5, 5.0, and 10.0 gallon reservoirs

### Factory installed features and options

- ⑦ Back-lit LCD Electric
- ⑧ Pressure transducer
- ⑨ Heat exchanger
- ⑩ Skid bar
- ⑪ Handle guard installed on all 2.5, 5, and 10 gal reservoirs
- ⑫ Reservoir handles included on all 2.5, 5 and 10 gallon pumps



◀ Increased output flow and extended brush life increase productivity for post-tensioning applications.

Usable Reservoir Capacity (gal)	Pump Dimensions					
	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)
1.0	16.7	5.6	11.0	6.0	-	-
2.0	16.7	5.6	11.0	8.1	-	-
2.5	17.3	6.2	16.5	12.0	15.1	11.0
5.0	18.3	7.1	16.5	16.6	19.7	15.6
10.0	21.7	10.6	15.7	19.9	22.7	18.9

# ZU-Series, Ordering Matrix

## CUSTOM BUILD YOUR ZU4 SERIES PUMP

If the ZU4 Series pump that would best fit your application cannot be found in the chart on page 82, you can easily build your custom ZU4 Series pump here.

▼ This is how a ZU-Series pump model number is built up:

<b>Z</b>	<b>U</b>	<b>4</b>	<b>4</b>	<b>08</b>	<b>L</b>	<b>B</b>	<b>-</b>	<b>H</b>	<b>K</b>	<b>T</b>	
1	2	3	4	5	6	7		8	8	8	8
Product Type	Motor Type	Flow Group	Valve Type	Reservoir Size	Valve Operation	Voltage		Options	Options	Options	Options

### 1 Product Type

**Z** = Pump Series

### 2 Motor Type

**U** = Universal electric motor

### 3 Flow Group

**4** = 60 in<sup>3</sup>/min @ 10,000 psi

### 4 Valve Type (see page 110 for more details)

- 1 Dump (VE32D)
- 2 3 way/2 position manual or electric (VM32 or VE32)
- 3 3 way/3 position manual or electric (VM33 or VE33)
- 4 4 way/3 position manual or electric (VM43 or VE43)
- 6 3 way/3 position locking manual w/po check (VM33-L)
- 7 3 way/2 position manual or electric (VM22)
- 8 4 way/3 position locking manual w/po check (VM43-L)
- 9 4 way/3 position manual w/power seating (VM43-LPS)

### 5 Reservoir Size (useable capacity)

- 04** = 1.0 gallon  
**08** = 2.0 gallon  
**10** = 2.5 gallon (includes side handles)  
**20** = 5.0 gallon (includes side handles)  
**40** = 10.0 gallon (includes side handles)

### 6 Valve Operation

- D** = Dump (solenoid valve w/pendant and LCD Electric)  
**J** = Jog (manual valve w/pendant and Standard Electric (i.e. w/o LCD))  
**K** = Jog (manual valve w/pendant and LCD Electric)  
**L** = Manual valve w/LCD Electric (w/o pendant)  
**P** = Manual valve w/pendant and classic electric (i.e. w/o LCD)  
**R** = Manual valve w/Classic electric (i.e. w/o LCD) [w/o pendant]  
**M** = Manual valve w/Standard Electric (i.e. w/o LCD) [w/o pendant]  
**S** = Solenoid valve w/pendant and LCD Electric

### 7 Voltage

- B** = 115V, 1 ph, 50/60Hz  
**E** = 208-240V, 1 ph, 50/60 Hz (w/European plug and CE EMC compliant)  
**I** = 208-240V, 1 ph, 50/60 Hz (w/NEMA 6-15 plug)

### 8 Options

- F** = Filter  
**G** = 0-15,000 psi gauge (2 1/2")<sup>1)</sup>  
**H** = Heat exchanger  
**K** = Skidbar (1 and 2 gallon reservoirs only)  
**L** = Level/temp switch<sup>2)3)</sup>  
**N** = No reservoir handles (includes lifting eyes)  
**R** = Roll bar  
**T** = Pressure transducer<sup>2)</sup>  
**U** = Foot switch

<sup>1)</sup> Pressure gauge not available on pump models with pressure transducer

<sup>2)</sup> These options require LCD electric

<sup>3)</sup> Not available on 1 and 2 gallon reservoirs

## ZU Series



Reservoir Capacity:

**1.0-10.0 gal.**

Flow at Rated Pressure:

**60 in<sup>3</sup>/min.**

Motor Size:

**1.7 hp**

Maximum Operating Pressure:

**10,000 psi**



### Speed Chart

To determine how a submerged pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: **251**



### Ordering Example

**Model Number:**  
**ZU4408LB-HKT**

ZU4408LB-HKT is a 60 in<sup>3</sup>/min at 10,000 psi pump with a 4-way, 3-position manual valve, a 2 gal. (8-liter) reservoir, operates on 115V, 1ph, 50/60 Hz and is specified with optional LCD electrical panel, heat exchanger, pressure transducer and skidbar.



### Torque Wrench Pumps

System matched air and electric pumps provide control to operate Enerpac Torque Wrenches.

Page: **204**



## Pressure Transducer\*

- More durable than analog gauges (against mechanical and hydraulic shock)
- More accurate than analog gauges (0.5% full scale of pump)
- Calibration can be fine tuned for certification
- “Set pressure” feature turns off motor at user defined pressure (or shifts valve to neutral on models with VE33/VE43 valves)
- Display pressure in psi, bar, or MPa

\* Requires LCD Electric

Accessory Kit Model Number	Adjustable Pressure Range (psi)	Switch-point repeatability	Dead-band (psi)
ZPT-U4 *	50-10,000	± 0,5%	50

\* Add suffix T for factory installation.



## Level/Temperature Switch

- Ensures feedback on pump oil level and temperature
- Drop-in design allows for easy installation to pump reservoir
- Plugs directly into pump electrical enclosure
- Built-in thermal sensing shuts off pump when unsafe operating temperature is reached
- Oil level switch shuts down pump before oil reaches an unsafe operating level

Model Number	Operating Temperature (° F)	Maximum Pressure (psi)	Weight (lbs)
ZLS-U5	40-230	150	.11

\* Add suffix L for factory installation.



## Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 118



## Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 117



## Foot Switch

- Hands-free remote control on solenoid dump and 3-position valves
- With 10 foot cord

Accessory Kit No.	Can be used on ZU4 Pumps with
ZCF-2 *	Solenoid VE-Series valves

\* Add suffix U for factory installation.



## Roll Cage

- Protects pump
- Provides greater pump stability

Accessory Kit Number	Fits on Reservoir
ZRC-04 *	1 and 2 gallon <sup>1)</sup>
ZRC-04H *	1 and 2 gallon <sup>2)</sup>
ZRB-10 *	2.5 gallon
ZRB-20 *	5 gallon
ZRB-40 *	10 gallon

\* Add suffix R for factory installation.  
<sup>1)</sup>Without heat exchanger <sup>2)</sup>With heat exchanger

Ordering Example:  
Model No. ZU4208BB-QR



# ZU-Series Factory Installed Options and Accessories



## Heat Exchanger

Can be factory installed on ZU4-Series LCD Electric pumps.

- Extends system life
- Stabilizes oil temperature at a maximum of 130° F at 70° F ambient temperature.

Do not exceed maximum oil flow and pressure ratings. Heat exchanger is not suitable for water-glycol or high water based fluids.

## Heat Exchanger\*

- Removes heat from the bypass oil to provide cooler operation
- Stabilizes oil viscosity, increasing oil life and reduces wear of pump and other hydraulic components

\* Requires LCD Electric

Accessory Kit No. *	Can be used on
ZHE-U115	115V pumps
ZHE-U230	230V pumps

## ZU Series



Reservoir Capacity:

**1.0-10.0 gal.**

Flow at Rated Pressure:

**60 in<sup>3</sup>/min.**

Motor Size:

**1.7 hp**

Maximum Operating Pressure:

**10,000 psi**



## Return Line Filter

- 25 micron nominal filter removes contaminants from return oil flow before allowing it back into tank
- Internal by-pass valve prevents damage if filter is dirty
- With maintenance indicator
- Replaceable filter element PF25

## Skidbar\*

- Provides easy two-hand lift
- Provides greater pump stability on soft or uneven surfaces
- Also available as an add-on kit (model number SBZ-4)

\* 1 and 2 gallon reservoirs only

Accessory Kit Model Number	Maximum Pressure (psi)	Maximum Oil Flow (GPM)	By-pass Setting (psi)
ZPF *	200	12.0	25

\* Add suffix F for factory installation.

Accessory Kit No.	For ZU-Series Pumps with Reservoir	Weight (lbs)
SBZ-4 *	1-2 gal. w/o heat exchanger	4.9
SBZ-4L *	1-2 gal. with heat exchanger	5.5

\* Add suffix K for factory installation.

▼ Shown from left to right: ZE3304MB-K, ZE4110DB-FHR












## The New Standard for Industrial Applications, Z-Class



### Oil Level Indicators

All ZE pumps feature an oil level indicator—sight glasses on the 1 and 2 gallon reservoirs and oil level gauges on the 2.5, 5 and 10 gallon reservoirs.

### ▼ SELECTION CHART \*

BASIC PUMP CONFIGURATIONS Select your ZE pump model here for most applications. For special requirements, see the ZE Pump ordering matrix.		Pump Type	Used with Cylinder		Valve Function			Valve** Model Number	Useable Oil Capacity (gal)
									
MANUAL VALVE CONTROL	<b>Manual Valve without electric box or LCD</b> <ul style="list-style-type: none"> <li>Ideal choice for most applications</li> <li>Manual valve control, for both single-acting or double-acting applications</li> <li>Manual motor control</li> <li>On/off switch on 1-phase electric motor</li> </ul>		●		●		●	VM32	2.0
			●		●	●	●	VM33	2.0
			●		●	●	●	VM33	5.0
			●		●	●	●	VM33	10.0
				●	●	●	●	VM43	2.0
				●	●	●	●	VM43	5.0
				●	●	●	●	VM43	10.0
MANUAL VALVE CONTROL	<b>Manual Valve with electric box and LCD</b> <ul style="list-style-type: none"> <li>Ideal choice for most applications</li> <li>Manual valve control, for both single-acting or double-acting applications</li> <li>Manual motor control</li> </ul>		●		●		●	VM32	2.0
			●		●		●	VM32	2.5
			●		●	●	●	VM33	5.0
			●		●	●	●	VM33	10.0
				●	●	●	●	VM43	5.0
				●	●	●	●	VM43	10.0
REMOTE VALVE CONTROL	<b>Solenoid Dump Valve with electric box and LCD</b> <ul style="list-style-type: none"> <li>Ideal for punching, crimping and cutting</li> <li>For use when load holding is not required</li> <li>Push-button control pendant with 10 ft. cord controls the valve and motor</li> </ul>		●		●		●	VE32D	1.0
			●		●		●	VE32D	2.0
			●		●		●	VE32D	2.5
			●		●		●	VE32D	5.0
	<b>Solenoid 3-position Valve with Electric Box and LCD</b> <ul style="list-style-type: none"> <li>Ideal for production and lifting applications</li> <li>All valves are 3-position for Advance-Hold-Retract</li> <li>Push-button control pendant with 10 ft. cord controls the valve and motor</li> </ul>		●		●	●	●	VE33	2.0
			●		●	●	●	VE33	2.5
			●		●	●	●	VE33	5.0
				●	●	●	●	VE43	2.0
	●	●	●	●	VE43	2.5			
	●	●	●	●	VE43	5.0			
	●	●	●	●	VE43	10.0			

\* Models in this chart are 115 VAC, 1-phase at 50/60 Hz for ZE3-4 or 220 VAC, 3 phase at 50/60 Hz for ZE5-6. For other options, please refer to the ZE Pump ordering matrix. \*\* See Valve Section for technical information.

# ZE-Series Electric Pumps

- Features **Z-Class** high-efficiency pump design; higher oil flow and by-pass pressure, cooler running and requires 18% less current draw than comparable pumps
- Totally enclosed, fan-cooled industrial electric motors supply extended life and stand up to harsh industrial environments
- Low-voltage pendant, on certain models, provides additional safety for the operator
- Multiple valve and reservoir configurations provide application specific models to match the most demanding industrial applications
- High-strength, molded electrical enclosure protects electronics, power supplies and LCD readout from harsh industrial environments
- LCD readout provides a number of diagnostic and readout capabilities never before offered on an industrial pump (included with electric valve models, optional on other models)

**ZE Series**



Reservoir Capacity:

**1.0-10.0 gal.**

Flow at Rated Pressure:

**40-200 in<sup>3</sup>/min**

Motor Size:

**1.0-7.5 hp**

Maximum Operating Pressure:

**10,000 psi**



### User Adjustable Relief Valve

All VM and VE-Series have a user adjustable relief valve to allow the operator to easily set the optimum working pressure.



### Locking Valves

For applications requiring positive load holding, VM-Series valves (except VM32) are available with a pilot-operated check valve. This provides hydraulic locking of the load until the valve is shifted into the retract position. To order this feature on your ZE-series pump see the valve type in the order matrix.

Page: 110




### Single-Stage or Two-Stage


Choose single-stage pumps for applications that require constant flow regardless of pressure, such as testing or clamping. Two-stage pumps have an increased output flow at low pressure to allow fast movement towards the load, for reduced cycle times and increased productivity. To specify a single-stage pump, place the letter "S" at the end of the model number. For example: **ZE5320LG-S**

ZE3 Series (1.0 hp) Output Flow Rate at 10,000 psi: 40 in <sup>3</sup> /min		ZE4 Series (1.5 hp) Output Flow Rate at 10,000 psi: 60 in <sup>3</sup> /min		ZE5 Series (3.0 hp) Output Flow Rate at 10,000 psi: 120 in <sup>3</sup> /min		ZE6 Series (7.5 hp) Output Flow Rate at 10,000 psi: 200 in <sup>3</sup> /min	
Model Number	Weight (lbs)	Model Number	Weight (lbs)	Model Number	Weight (lbs)	Model Number	Weight (lbs)
ZE3208MB	91	ZE4208MB	100	-	-	-	-
ZE3308MB	92	ZE4308MB	101	-	-	-	-
ZE3320MB	132	ZE4320MB	141	ZE5320MG	152	ZE6320MG	191
ZE3340MB	183	ZE4340MB	192	ZE5340MG	203	ZE6340MG	242
ZE3408MB	92	ZE4408MB	101	-	-	-	-
ZE3420MB	132	ZE4420MB	141	ZE5420MG	152	ZE6420MG	191
ZE3440MB	183	ZE4440MB	192	ZE5440MG	203	ZE6440MG	242
ZE3208LB	96	ZE4208LB	105	-	-	-	-
ZE3210LB	109	ZE4210LB	112	ZE5210LG	132	ZE6210LG	171
ZE3320LB	138	ZE4320LB	146	ZE5320LG	160	ZE6320LG	199
ZE3340LB	188	ZE4340LB	197	ZE5340LG	210	ZE6340LG	249
ZE3420LB	138	ZE4420LB	145	ZE5420LG	160	ZE6420LG	199
ZE3440LB	189	ZE4440LB	197	ZE5440LG	210	ZE6440LG	250
ZE3104DB	94	ZE4104DB	103	-	-	-	-
ZE3108DB	105	ZE4108DB	109	-	-	-	-
ZE3110DB	114	ZE4110DB	122	ZE5110DG	136	ZE6110DG	175
ZE3120DB	141	ZE4120DB	149	ZE5120DG	163	ZE6120DG	202
ZE3140DB	190	-	-	-	-	-	-
ZE3308SB	112	ZE4308SB	121	-	-	-	-
ZE3310SB	125	ZE4310SB	134	ZE5310SG	147	ZE6310SG	187
ZE3320SB	152	ZE4320SB	161	ZE5320SG	174	ZE6320SG	213
ZE3408SB	112	ZE4408SB	121	-	-	-	-
ZE3410SB	125	ZE4410SB	134	ZE5410SG	147	ZE6410SG	187
ZE3420SB	152	ZE4420SB	161	ZE5420SG	174	ZE6420SG	213
ZE3440SB	203	ZE4440SB	212	ZE5440SG	225	ZE6440SG	264


\* All models in this chart are 115 VAC, 1-phase at 50/60 Hz. For other options please refer to the ZE Pump ordering matrix.

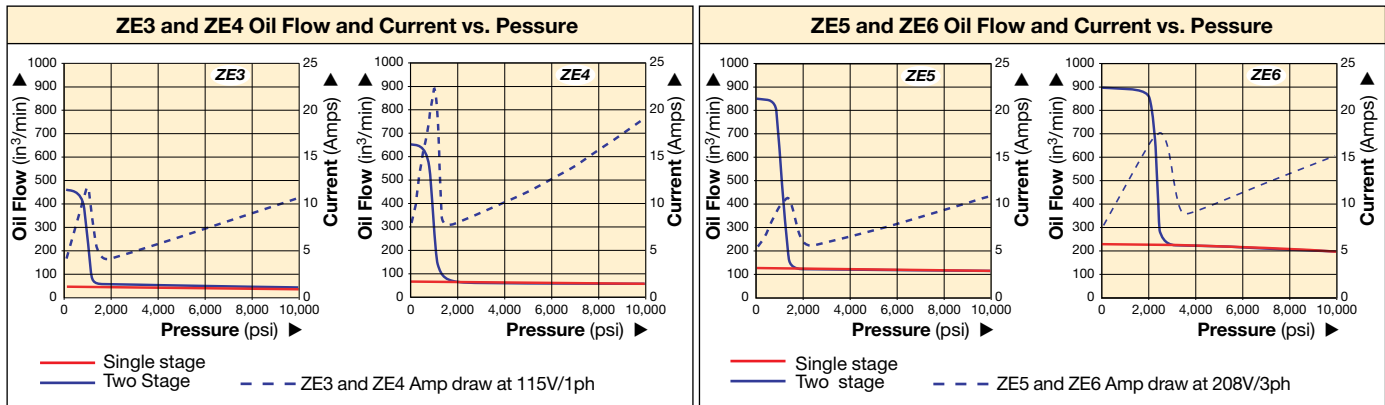

### ZE-Series Pumps with 1 and 2 gallon reservoir

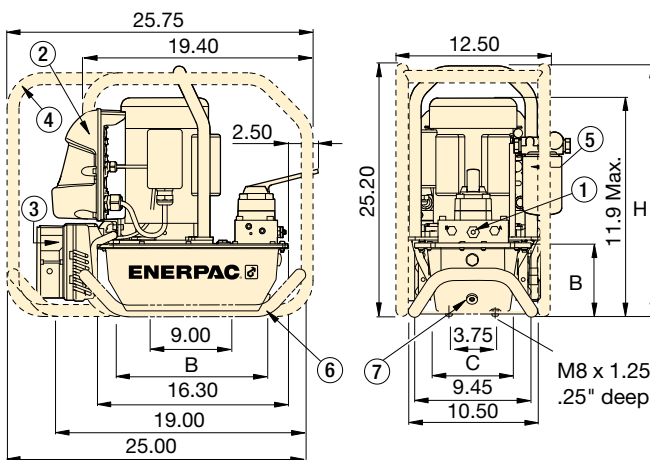

### ZE-Series Pumps with 2.5, 5, 10 gallon reservoir

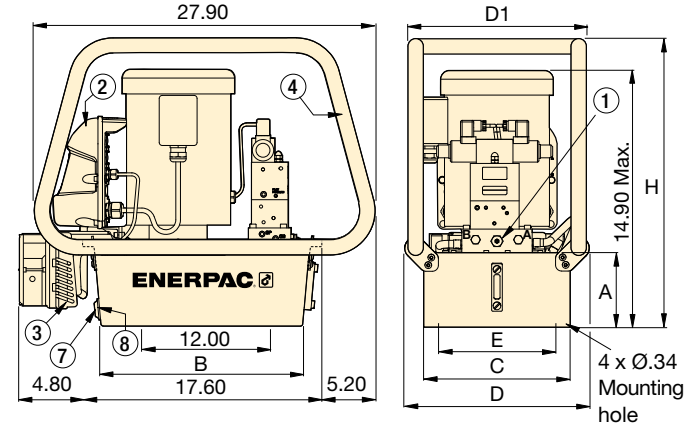

Reservoir Size (useable oil) (gal)	ZE-Series Pump Dimensions (in)						
	A	B	C	D	D1	E	H
1.0	5.6	11.0	6.0	-	-	-	20.2
2.0	5.6	11.0	8.1	-	-	-	22.6
2.5	6.2	16.5	12.0	15.1	14.6	11.0	23.6
5.0	7.1	16.5	16.6	19.7	19.2	15.6	24.6
10.0	10.6	15.7	19.9	22.7	22.5	18.9	28.1

- ① User adjustable relief valve on all manual and solenoid valves:  
3/8" NPTF on A and B ports  
1/4" NPTF on auxiliary ports
- ② Electric Box (Optional w/manual valve)
- ③ Heat Exchanger (Optional)
- ④ Roll Bar (Optional)
- ⑤ Return Line Filter (Optional)
- ⑥ Skid Bar (Optional)
- ⑦ Oil Drain
- ⑧ Oil Level/Temperature Switch (Optional)

### ▼ PERFORMANCE CHART

Pump Series	Operation	Output Flow Rate (in <sup>3</sup> /min)				Available Reservoir Sizes (useable oil) (gal)	Motor Size		Relief Valve Adjustment Range (psi)	Sound Level (dBA)
		100 psi	700 psi	5,000 psi	10,000 psi		hp	RPM		
ZE3	Single-stage	43	43	42	40	1, 2, 2.5, 5, 10	1.0	1750	1000 - 10,000	75
	Two-stage	450	385	42	40					
ZE4	Single-stage	64	64	62	60	1, 2, 2.5, 5, 10	1.5	1750	1000 - 10,000	75
	Two-stage	650	600	62	60					
ZE5	Single-stage	128	126	123	120	2.5, 5, 10	3.0	1750	1000 - 10,000	75
	Two-stage	850	825	123	120					
ZE6	Single-stage	220	215	210	200	2.5, 5, 10	7.5	3450	1000 - 10,000	80
	Two-stage	900	890	210	200					


Output flow rate is listed at 60 Hz.  
Flow rate will be approximately 5/6 of these values at 50 Hz.

# ZE Electric Pump Ordering Matrix

## CUSTOM BUILD YOUR ZE SERIES PUMP

If the ZE Series pump that would best fit your application cannot be found in the chart on page 88, you can easily build your custom ZE Series pump here.

▼ This is how a ZE Series Pump model is built up:

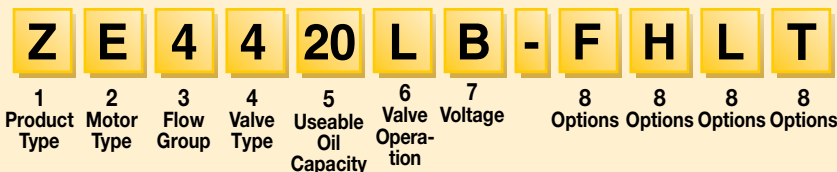

### 1 Product Type

**Z** = Pump Class

### 2 Prime movers

**E** = Induction Electric Motor

### 3 Flow Group

- 3** = 40 in<sup>3</sup>/min @ 10,000 psi
- 4** = 60 in<sup>3</sup>/min @ 10,000 psi
- 5** = 120 in<sup>3</sup>/min @ 10,000 psi<sup>1)</sup>
- 6** = 200 in<sup>3</sup>/min @ 10,000 psi<sup>1)</sup>

### 4 Valve Types

- 0** = No valve w/coverplate
- 1** = Dump (VE32D)
- 2** = 3 way/2 position manual (VM32)
- 3** = 3 way/3 position manual or electric (VM33 or VE33)
- 4** = 4 way/3 position manual or electric (VM43 or VE43)
- 6** = 3 way/3 position locking manual w/po check (VM33L)
- 7** = 3 way/2 position manual (VM22)
- 8** = 4 way/3 position locking manual w/po check (VM43L)

### 5 Useable Oil Capacity

- 04** = 1.0 gallon<sup>2)</sup>
- 08** = 1.75 gallon<sup>2)</sup>
- 10** = 2.5 gallon
- 20** = 5.0 gallon
- 40** = 10.0 gallon

### 8 Options (specify in alphabetical order)

- |   |   |
|---|---|
| <b>F</b> = Filter                                       | <b>P</b> = Pressure switch <sup>4)</sup>        |
| <b>G</b> = 0-15,000 psi gauge (2 1/2" <sup>7)</sup>     | <b>R</b> = Roll bar                             |
| <b>H</b> = Heat exchanger <sup>4)</sup>                 | <b>S</b> = Single stage                         |
| <b>K</b> = Skidbar (1 and 2 gal. reservoirs only)       | <b>T</b> = Pressure transducer <sup>4) 7)</sup> |
| <b>L</b> = Level/temp switch <sup>4) 5)</sup>           | <b>U</b> = Foot switch <sup>4)</sup>            |
| <b>N</b> = No reservoir handles (includes lifting eyes) |   |

- 1) ZE5 and ZE6 series pumps only available with 3-phase motors.
- 2) 1 and 2 gallon reservoirs only available on ZE3 and ZE4 series pumps.
- 3) 115 volt pumps are supplied with 15 amp plug for intermittent use. 20 amp circuit recommended for frequent full pressure use.
- 4) These options require LCD electrical package. Pressure switch option only available on manual valves without locking valve. The LCD electrical package can accept either a pressure switch or pressure transducer, but not both.
- 5) Not available with 1 and 2 gallon reservoirs.
- 6) Standard Electric models with 3-phase motors are shipped without cord, motor starter or overload protection.
- 7) Pressure gauge not available on pump models with pressure transducer. Pressure transducer provides digital pressure readout on LCD display.

### 6 Valve Operation

- D** = Dump valve (w/ pendant and LCD)
- L** = Manual valve (w/o pendant, w/ LCD)
- M** = Manual valve <sup>6)</sup> (w/o pendant or LCD)
- N** = No valve <sup>6)</sup> (no electrical box)
- S** = Solenoid valve (w/ pendant and LCD)
- W** = No valve (w/o pendant and LCD)

### 7 Voltages

- Single Phase
- B** = 115V 1 ph 50-60Hz <sup>3)</sup>
  - E** = 208-240V 1 ph 50-60 Hz European Plug
  - I** = 208-240V 1 ph 50-60 Hz USA Plug
- Three Phase <sup>6)</sup>
- M** = 190-200V 3ph 50-60Hz
  - G** = 208-240V 3ph 50-60Hz
  - W** = 380-415V 3ph 50-60Hz
  - K** = 440V 3ph 50-60Hz
  - J** = 460-480V 3ph 50-60Hz
  - R** = 575V 3ph 60Hz

## ZE Series



Reservoir Capacity:

**1.0-10.0 gal.**

Flow at Rated Pressure:

**40-200 in<sup>3</sup>/min.**

Motor Size:

**1.0-7.5 hp**

Maximum Operating Pressure:

**10,000 psi**



### Ordering Example 1

**Model Number: ZE4420MB**

ZE4420MB is a 60 in<sup>3</sup>/min, 10,000 psi pump with a 4 way, 3-position manual valve, a 5 gallon reservoir, operates on a 115 VAC 1 ph 50/60 Hz motor and includes standard electrical package.

### Ordering Example 2

**Model Number: ZE6440SG-HNU**

ZE6440SG-HNU is a 200 in<sup>3</sup>/min, 10,000 psi pump with a 4 way, 3-position electric valve, a 10 gallon reservoir, operates on a 230 VAC 3 ph 50/60 Hz motor. It includes LCD electrical package and foot switch on 10 ft cord, no reservoir handles and the optional heat exchanger.



### Single-Stage or Two-Stage

Choose single-stage pumps for applications that require constant flow regardless of pressure, such as testing or clamping.

Two-stage pumps have an increased output flow at low pressure to allow fast movement towards the load, for reduced cycle times and increased productivity.



## Electric Box <sup>1)</sup>

- Back-lit LCD
- Pump usage information, hour and cycle counts
- Low-voltage warning and recording
- Self-test and diagnostic capabilities
- Pressure read-out <sup>2)</sup>
- Auto-mode pressure setting <sup>2)</sup>
- Information can be displayed in six languages <sup>3)</sup>

<sup>1)</sup> Included on pumps with solenoid valves. Can be factory installed on pumps with manual valve

<sup>2)</sup> When used with optional pressure transducer

<sup>3)</sup> English, French, German, Italian, Spanish and Portuguese



## Level/Temperature Switch <sup>4)</sup>

- Shuts down pump before oil level reaches an unsafe level, avoiding damage due to cavitation
- Shuts down pump when unsafe oil temperature is reached
- Ideal if pump is used in remote area without visual access to oil level

<sup>4)</sup> 24 V, requires Electric Box. Available for 2.5, 5 and 10 gallon reservoirs

Accessory Kit Model Number	Fixed Temperature Signal (°F)	Operating Temperature (°F)	Max. Pressure (psi)
ZLS-U4 *	75	40 - 230	150

\* Add suffix **L** for factory installation, see ordering matrix.



## Return Line Filter

- 25 micron nominal filter removes contaminants from return oil flow before allowing it back into tank
- Internal by-pass valve prevents damage if filter is dirty
- With maintenance indicator
- Replaceable filter element PF25

Accessory Kit Model Number	Maximum Pressure (psi)	Maximum Oil Flow (GPM)	By-pass Setting (psi)
ZPF *	200	12.0	25

\* Add suffix **F** for factory installation, see ordering matrix.



## Roll Cage

- For easy portability and hoisting
- Protects pump and electric box
- Available for all reservoir sizes

Accessory Kit Number	Fits on Reservoir
ZRC-04 *	1 and 2 gallon <sup>1)</sup>
ZRC-04H *	1 and 2 gallon <sup>2)</sup>
ZRB-10 *	2.5 gallon
ZRB-20 *	5 gallon
ZRB-40 *	10 gallon

\* Add suffix **R** for factory installation, see ordering matrix.  
<sup>1)</sup> Without heat exchanger <sup>2)</sup> With heat exchanger



## Skid Bar

- Provides easy two-hand lift
- Provides greater pump stability on soft or uneven surfaces

Accessory Kit Number	For ZE-Series Pumps with Reservoir	Weight (lbs)
SBZ-4 *	1-2 gal. w/o heat exchanger	4.9
SBZ-4L *	1-2 gal. with heat exchanger	5.5

\* 1 and 2 gallon reservoirs only. Add suffix **K** for factory installation, see ordering matrix.



## Foot Switch <sup>5)</sup>

- Hands-free remote control on solenoid dump and 3-position valves
- With 10 foot cord

<sup>5)</sup> 15 V, requires Electric Box

Accessory Kit Number	Can be used on ZE-Series Pumps with
ZCF-2 *	Solenoid VE-Series valves

\* Add suffix **U** for factory installation, see ordering matrix.

# ZE-Series, Factory Installed Options & Accessories



## Pressure Transducer <sup>1)</sup>

- Displays pressure on LCD in bar, MPa or psi
- More accurate than analog gauge
- Calibration can be fine-tuned for certification
- Easy-viewing variable rate display
- “Set pressure” feature turns off motor at user defined pressure (or shifts valve to neutral on models with VE33/ VE43 valves)

<sup>1)</sup> 24 V, requires Electric Box

Accessory Kit Model number	Adjustable Pressure Range (psi)	Switch-point Repeatability	Dead-band (psi)
ZPT-U4 *	50-10,000	± 0,5%	50

\* Add suffix **T** for factory installation, see ordering matrix.



## Pressure Switch <sup>2)</sup>

- Controls pump, monitors system
- Adjustable pressure 500-10,000 psi
- Includes glycerine filled 15,000 psi pressure gauge G2536L
- Accuracy ± 1,5% of full scale

<sup>2)</sup> 24 V, requires Electric Box. Not available in combination with pressure transducer.

Accessory Kit Model number	Switch-point Repeatability	Deadband (psi)	Oil Ports (NPT)
ZPS-E3 *	± 2%	115-550	3/8"

\* Add suffix **P** for factory installation, see ordering matrix.

## ZE Series



Reservoir Capacity:  
**1.0-10.0 gal.**

Flow at Rated Pressure:  
**40-200 in<sup>3</sup>/min.**

Motor Size:  
**1.0-7.5 hp**

Maximum Operating Pressure:  
**10,000 psi**



## Pendants <sup>3)</sup>

- For pump types with valve operation “W” (No Valve, with Electric Box, without pendant)

<sup>3)</sup> When ordering Enerpac VE-Series solenoid valve the pendant must be ordered separately. Pendant connection to be plugged into electric box

Pendant Model Number	To be used with Solenoid Valve:
ZCP-1	VE32D
ZCP-3	VE32, VE33, VE43



## Heat Exchanger <sup>4)</sup>

- Removes heat from bypass oil to provide cooler operation
- Stabilizes oil viscosity, increasing oil life and reduces wear of pump and other hydraulic components.

<sup>4)</sup> 24 VDC, requires electric box

Accessory Kit Model number	Fits on Reservoir	Weight (lbs)
ZHE-E04 *	1 and 2 gallon	9.0
ZHE-E10 *	2.5, 5, and 10 gallon	9.0

\* Add suffix **H** for factory installation, see ordering matrix.



## ZHE-Series Heat Exchangers

Heat exchanger stabilizes oil temperature at 130° F at 70° F ambient temperature. Thermal transfer at 5 GPM and 70° F ambient temperature: 900 Btu/hour.

Do not exceed maximum oil flow of 7.0 GPM and maximum pressure of 300 psi. Not suitable for water-glycol or high water based fluids.

▼ Shown: PEM-8418



- Panel-mounted pressure gauge and adjustable relief valve for system pressure control
- Two-speed pump design, with high by-pass pressure, for rapid cylinder advance
- Dual voltage motor (230/460 VAC, 3 phase, 60 Hz)
- Full length reservoir sight tube with integral thermometer for ease in monitoring oil level and temperature

## The Largest Pump for the Largest Jobs



### Locking Valves

Pumps with VM-4 manual valves are available with VM-4L manual valves for positive load holding. Add suffix "L" to pump model number.

Page: 110



### FS-34 Foot Control Switch

This 3-position switch allows hands-free control of the solenoid valve on the pump. Operates 24V and

115V valves that use the square electrical connector.



### Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system,

specify only genuine Enerpac hydraulic hoses.

Page: 118



◀ With similar specifications, a gasoline powered EGM-8000 Series is shown here performing a synchronized lift.



# 8000-Series Electric Pumps



## About the 8000 Series

The 8000 Series is the largest pump in the Enerpac line and the best choice to power most large size cylinders, multiple cylinder circuits, and applications where the need for high speed requires high flow rates.

The 8000 Series, with its large reservoir capacity, is best suited for large jobs and may be the only solution because of the required oil capacity.

For further application assistance see our "Yellow Pages", or consult your local Enerpac office.

Page: 241

## PE Series





Reservoir Capacity:  
**25 gal.**

Flow at Rated Pressure:  
**2.0 gal/min.**

Motor Size:  
**12.5 hp**

Maximum Operating Pressure:  
**10,000 psi**

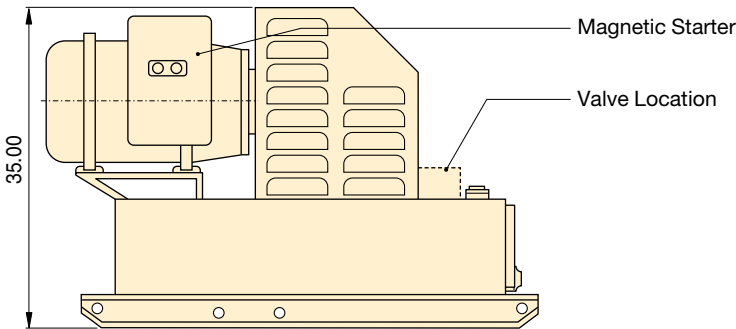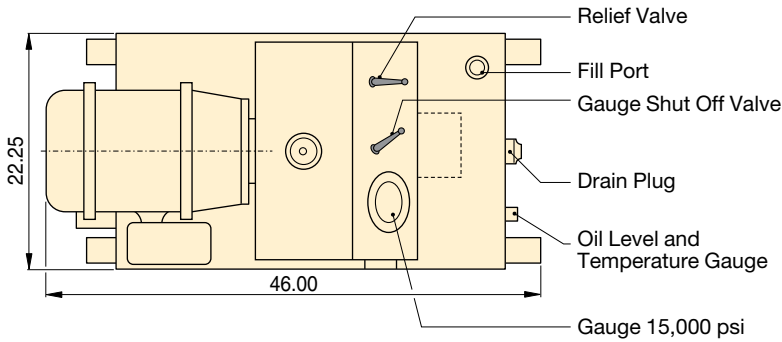


Dimensions shown in inches.



## Speed Chart

To determine how an 8000 Series pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the "Yellow Pages".

Page: 251

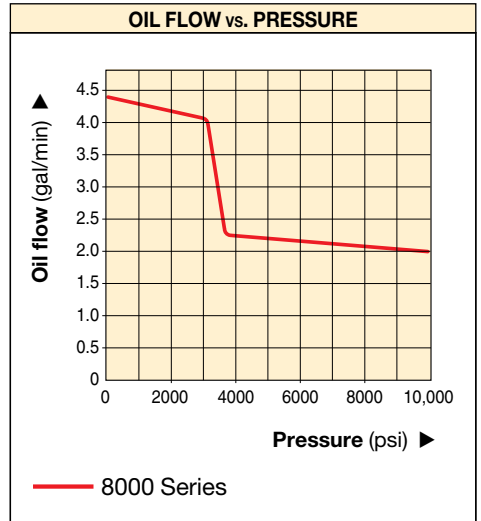

Used with Cylinder	Usable Oil Capacity (gal)	Model Number	Pressure Rating (psi)		Output Flow Rate (gal/min)		Valve Type	Valve Function	Current Draw (Amps)	Motor Voltage* (VAC)	Sound Level (dBA)	Weight (lbs)
			1st stage	2nd stage	1st stage	2nd stage						
Single-acting	18	PEM-8218	3,700	10,000	4.4	2.0	Manual (VM-2)	3-way, 2-pos.	33.0	230	78-84	720
	18	PEM-8218C	3,700	10,000	4.4	2.0			16.5	460	78-84	720
Double-acting	18	PEM-8418	3,700	10,000	4.4	2.0	Manual (VM-4)	4-way, 3-pos.	33.0	230	78-84	720
	18	PEM-8418C	3,700	10,000	4.4	2.0			16.5	460	78-84	720
	18	PER-8418	3,700	10,000	4.4	2.0	Solenoid (VE43)	4-way, 3-pos.	33.0	230	78-84	765
	18	PER-8418C	3,700	10,000	4.4	2.0			16.5	460	78-84	765

\* Consult Enerpac for availability of other voltages.

▼ Shown: XA11G



- Ergonomic design for less operator fatigue
- Variable oil flow and fine metering for precise control
- Higher oil flow for increased productivity
- Closed hydraulic system prevents contamination and allows pump usage in any position
- Pedal lock function for retract position
- Ground screw for improved ATEX explosion safety
- External adjustable pressure setting valve

▼ Easily operated by foot. No need to fully lift up foot - rest body weight on heel, resulting in a hands-free and stable working position.



## XVARI<sup>®</sup> TECHNOLOGY

### Productivity and Ergonomics



#### Optional Pressure Gauge

Integrated gauge with calibrated scale reading in psi, bar and MPa for actual pressure reading.



#### Optional 4-Way 3-Position Valve

For powering double-acting hydraulic cylinders and tools.



#### Optional 1/2 Gallon Reservoir

Double oil capacity for powering larger hydraulic cylinders and tools.



#### Pedal Safety Guard

Customer installed frame protects both pedals against accidental activation.

Order model number <sup>1)</sup>

**XPG1**



#### "Joy-stick" Lever Kit

Customer installed set of handles for manual operation of both pedals.

Order model number <sup>1)</sup>

**XLK1**



#### Hydraulic Swivel Connector

Customer installed swivel connector for optimal orientation of the hydraulic hose.

Order model number <sup>1)</sup>

**XSC1**

<sup>1)</sup> Accessories must be ordered separately.

# XVARI® Technology, Air Driven Hydraulic Pumps



## XVARI® TECHNOLOGY

### Production Application

XA11 pump is used with a 13-ton hollow cylinder to compress and position diesel engine valve springs.

The operator benefits from the fine metering capacities of the XVARI® Technology to apply the mandatory precise stroke and force.

www.xvari.com

## XA Series



Reservoir Capacity:

**61-122 in<sup>3</sup>**

Flow at Rated Pressure:

**15 in<sup>3</sup>/min.**

Air Consumption:


**10-35 scfm**

Maximum Operating Pressure:

**10,000 psi**


### ▼ XA-SERIES PERFORMANCE CHART

Maximum Pressure (psi)	Output Flow Rate (in <sup>3</sup> /min)		Pump Series	Valve Function	Dynamic Air Pressure (psi)
	No load	Load			
10,000	120	15	<b>XA1</b>	Advance/Hold/Retract	30-125

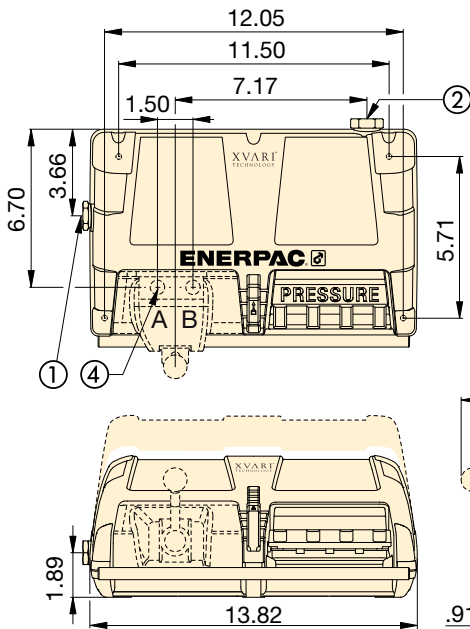


- ① 3/8"-18 NPTF Oil Outlet
- ② 1/4"-18NPTF Air Inlet
- ③ 4/3 Optional Control Valve
- ④ 3/8"-18 NPTF Oil Outlet

Dimensions shown in inches.

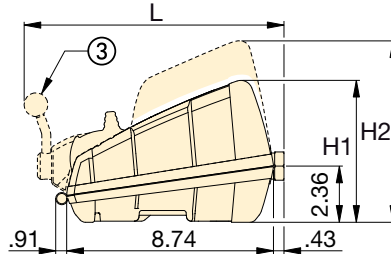

### OIL FLOW vs. PRESSURE

at 100 psi dynamic air pressure

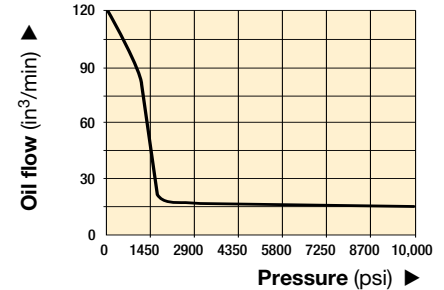

### Regulator-Filter-Lubricator

Recommended for use with all XA-Series Air pumps. Provides clean, lubricated air and allows for air pressure adjustment.

Order model number <sup>1)</sup>

**RFL102**

### ▼ SELECTION CHART

For Use With Cylinder Tool	Usable Oil Capacity (in <sup>3</sup> )	Model No. <sup>1)</sup>	Pressure Gauge	3-Way, 3-Position Valve	4-Way, 3-Position Valve	Dimensions (in)			Weight (lbs)
						H1	H2	L	
Single-acting	61	<b>XA11</b>	-	•	-	5.98	-	-	19.0
	122	<b>XA12</b>	-	•	-	-	6.69	-	22.4
Single-acting	61	<b>XA11G</b>	•	•	-	5.98	-	-	19.4
	122	<b>XA12G</b>	•	•	-	-	6.69	-	22.9
Double-acting	61	<b>XA11V</b>	-	-	•	5.98	-	10.98	22.3
	122	<b>XA12V</b>	-	-	•	-	6.69	10.98	25.7
Double-acting	61	<b>XA11VG</b>	•	-	•	5.98	-	10.98	22.7
	122	<b>XA12VG</b>	•	-	•	-	6.69	10.98	26.2

<sup>1)</sup> High-flow coupler CR400 and accessories must be ordered separately.

▼ Shown left to right: PAMG-1402N, PATG-1102N, PARG-1102N, PATG-1105N



- High efficiency cast aluminum air motor for increased life and reduced air consumption
- Fully serviceable air motor assembly
- Reinforced heavy-duty reservoir for applications in tough environments
- New generation air saver piston with rugged one-piece design reduces air consumption and operating costs
- Return-to-tank port for use in remote valve applications
- Quiet – only 76 dBA with low air consumption of 12 scfm
- Operating air pressure: 40-125 psi, enables pump to start at extremely low pressure
- Internal pressure relief valve provides overload protection

▼ Easily operated by hand or by foot.



## Compact Air Over Hydraulic



### RFL-102 Regulator-Filter-Lubricator

Recommended for use with all air pumps. Provides clean, lubricated air and allows

for air pressure adjustment. Steel bowl guards are standard.

Order model number <sup>1)</sup>

**RFL102**



### Large Reservoir Models

The Turbo II Air Pump is also available with a larger reservoir: **PATG-1105N**, **PAMG-1405N**, and **PARG-1105N**.



### Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system,

specify only genuine Enerpac hydraulic hoses.

Page: **118**

Used with Cylinder	Usable Oil Capacity (in <sup>3</sup> )	Model Number
Single-acting	127	PATG-1102N*
	230	PATG-1105N
	127	PARG-1102N
	230	PARG-1105N
Double-acting	127	PAMG-1402N
	230	PAMG-1405N

\* Available as set. See note on next page.


# Turbo II Air Hydraulic Pumps



The PATG-models use a foot or hand operated treadle to control air and valve functions.

The PAMG-models use a treadle with a locking feature and a 4-way manual valve.

The PARG-models use a 15 ft. pendant hose for convenient one-man operation.

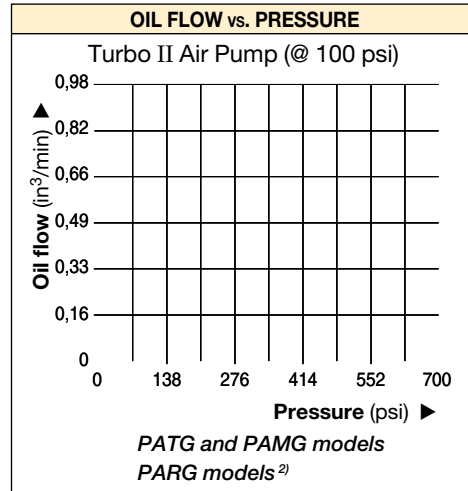

## PA Series




Reservoir Capacity:  
**150-305 in<sup>3</sup>**

Flow at Rated Pressure:  
**10 in<sup>3</sup>/min.**

Maximum Operating Pressure:  
**10,000 psi**

Pressure Rating (psi)	Output Flow Rate (in <sup>3</sup> /min)		Model Number	Valve Function	Air Pressure Range (psi)	Air Consumption (scfm)	Sound Level (dBA)
	No load	Load					
10,000	60	10	PATG & PAMG	Advance/	40-125	12	76
10,000	51 <sup>1)</sup>	6 <sup>1)</sup>			PARG	Hold/ Retract	40-125
10,000	48 <sup>2)</sup>	5 <sup>2)</sup>					40-125




### Pump and Cylinder Sets

Turbo II pumps are also available as sets (Turbo II pump, cylinder, gauge, couplers and hose) for your ordering convenience.

Page: **58**

<sup>1)</sup> Air supply connected at pendant.

<sup>2)</sup> Air supply connected at pump shown on flow curve.

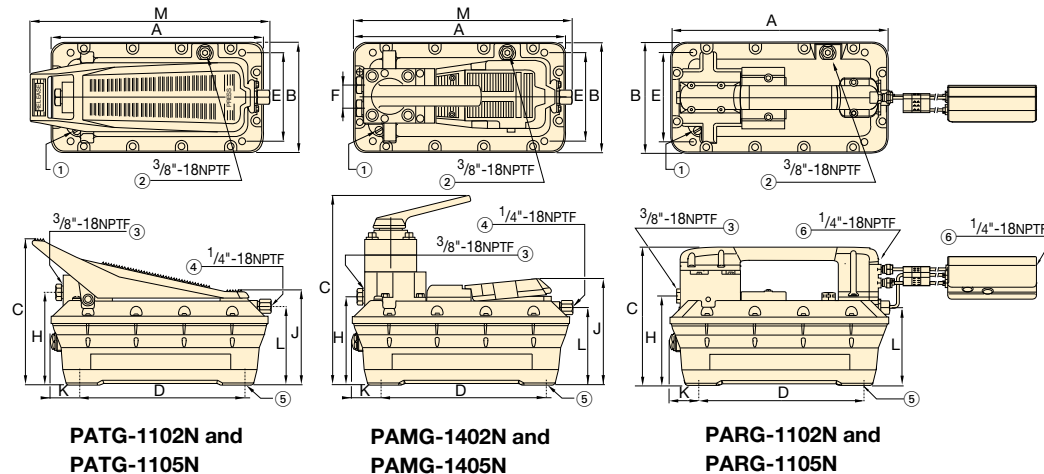

- ① Filtered "Permanent" Tank Vent
- ② Return-to-Tank/Auxiliary Vent/Fill Tank Port
- ③ Hydraulic Output
- ④ Swivel Air Input with Filter
- ⑤ 4 Mounting Holes for #10 thread forming screw. Max. depth into reservoir = .75"
- ⑥ Air Input Options

Dimensions (in)											Weight (lbs)	Model Number
A	B	C	D	E	F	H	J	K	L	M		
12.33	6.49	8.29	9.04	4.00	—	5.15	5.75	1.65	4.43	13.62	18	PATG-1102N*
15.60	7.92	8.22	9.04	4.00	—	5.08	5.75	3.28	4.41	17.20	22	PATG-1105N
12.33	6.49	7.88	9.04	4.00	—	5.15	—	1.65	4.43	—	22	PARG-1102N
15.60	7.92	7.88	9.04	4.00	—	5.08	—	3.28	4.41	—	26	PARG-1105N
12.33	6.49	10.50	9.04	4.00	1.42	5.23	6.00	1.65	4.43	12.60	24	PAMG-1402N
15.60	7.92	10.50	9.04	4.00	1.42	5.19	6.00	3.28	4.41	15.94	28	PAMG-1405N

# PA-Series, Air Hydraulic Pumps

▼ Shown from top to bottom: PA-1150, PA-133



## PA Series

Reservoir Capacity:

**36-80 in<sup>3</sup>**

Flow at Rated Pressure:

**8 in<sup>3</sup>/min.**

Maximum Operating Pressure:

**10,000 psi**




### PC-66 Reservoir Conversion Kit


Double the reservoir capacity of your existing PA-133 with this easy to install conversion kit.

- Rugged construction – built for long life and easy service
- Swivel coupling simplifies hydraulic connection and pump operation
- Three-position treadle provides cylinder advance, hold and retract operation
- PA-133 operates in all positions for increased versatility in use and mounting
- Base mounting slots provided on PA-133

OIL FLOW vs. PRESSURE

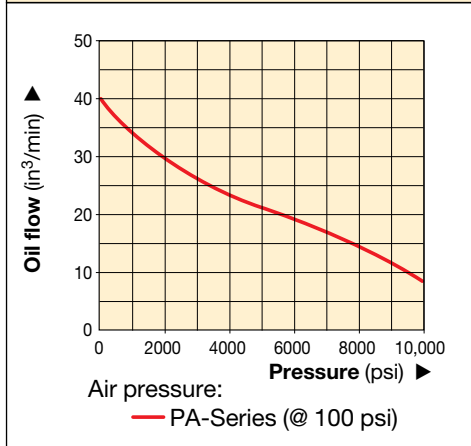

Dimensions shown in inches.

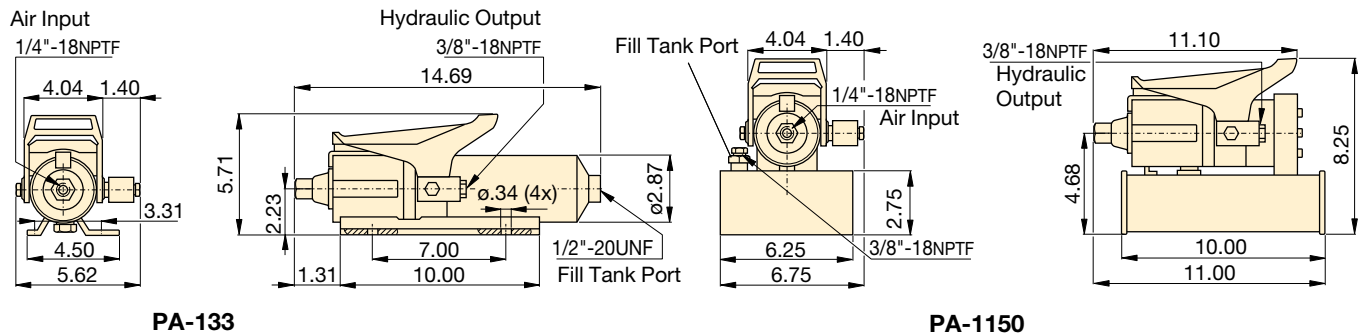

Used with Cylinder	Usable Oil Capacity (in <sup>3</sup> )	Model Number	Pressure Rating (psi)	Output Flow Rate (in <sup>3</sup> /min)		Valve Function	Air Pressure Range* (psi)	Air Consumption (scfm)	Sound Level (dBA)	Weight (lbs)
				No load	Load					
Single-acting	36	PA-133	10,000	40	8	Advance/Hold/Retract	60-120	9	85	12
	80	PA-1150	10,000	40	8	Advance/Hold/Retract	60-120	9	85	18

\* Recommended Regulator-Filter-Lubricator: RFL-102

# PAM-Series, Air Hydraulic Pumps

▼ Shown: PAM-1041



## PAM Series

Reservoir Capacity:  
**1.0-2.0 gal.**

Flow at Rated Pressure:  
**9 in<sup>3</sup>/min.**

Maximum Operating Pressure:  
**10,000 psi**



### Locking Valves

Pumps with VM-4 manual valves are available with VM-4L manual locking valves instead. Add suffix "L" to pump model number.


Page: 110




### VA-2 Remote Valve

For remote operation of PAM-10 series air pumps. Permits either hand or foot operation.

- Twin air motor configuration delivers high-flow performance in first stage, up to 200 psi, for rapid cylinder advance
- 1 and 2 gallon reservoirs for use with a wide range of cylinders
- Integral shroud protects air motors and provides easy portability

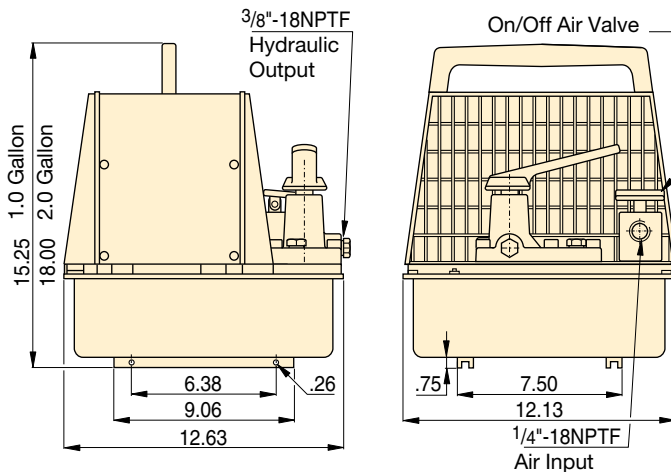

PAM-1022

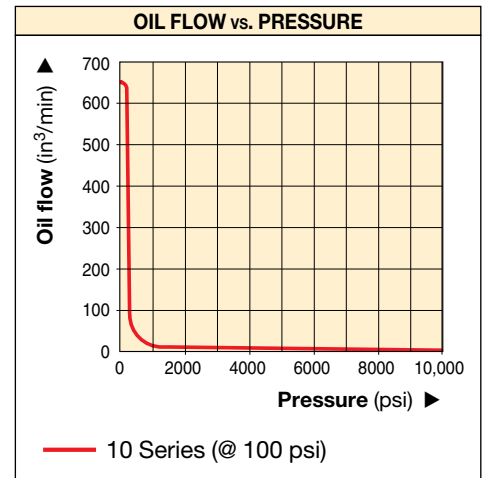

Used with Cylinder	Usable Oil Capacity (gal)	Model Number (with Shroud)	Pressure Rating (psi)	Output Flow Rate (in <sup>3</sup> /min)		Valve Function	Valve Model	Air Pressure Range* (psi)	Air Consumption (scfm)	Sound Level (dBA)	Weight (lbs)
				1 <sup>st</sup> stage	2 <sup>nd</sup> stage						
Single-acting	0.7	PAM-1021	10,000	650	9	Adv/Hold/Ret	VM-2	60-120	18	87	50
	2.0	PAM-1022	10,000	650	9	Adv/Hold/Ret	VM-2	60-120	18	87	60
Double-acting	0.7	PAM-1041	10,000	650	9	Adv/Hold/Ret	VM-4	60-120	18	87	50
	2.0	PAM-1042	10,000	650	9	Adv/Hold/Ret	VM-4	60-120	18	87	60

\* Recommended Regulator-Filter-Lubricator: RFL-102

▼ Shown: **ZA4208MX, ZA4420MX**



## Z Tough. Dependable. Innovative. CLASSIC



### ATEX Certified

See explanation of ATEX certification in the “Yellow Pages.”



Page: 241



### Speed Chart

To determine how a ZA Series pump will operate your cylinder, see the Pump/Cylinder Speed Chart in the “Yellow Pages”.

Page: 251



### Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 118

- Features Z-Class high efficiency pump design, higher oil flow and bypass pressure
- Two-speed operation and high by-pass pressure reduces cycle time for improved productivity
- Internal relief valves. One is factory set for overload protection while the second is user adjustable for pre-setting maximum system pressure
- Sight gauge on 1 and 2 gallon and level gauge on 2.5, 5 and 10 gallon reservoirs allow quick and easy oil level monitoring
- Optional heat exchanger warms exhaust air to prevent freezing and cools the oil

ZA4 Performance		
Dynamic Air Pressure Range	Air Consumption	Sound Level
(psi)	(scfm)	(dBA)
60-100	20-100	94-97

Used with Cylinder	Usable Oil Capacity (gal)	Valve Model Number <sup>2)</sup>	Valve Function	Model Number	Output Flow Rate <sup>1)</sup>			
					(in <sup>3</sup> /min)			
					100 psi	700 psi	5,000 psi	10,000 psi
Single-acting	1.0	Manual VM32	Advance/Retract	ZA4204MX	850	675	110	80
	1.75			ZA4208MX	850	675	110	80
	5.0			ZA4220MX	850	675	110	80
Double-acting	1.0	Manual VM43	Advance/Hold/Retract	ZA4404MX	850	675	110	80
	1.75			ZA4408MX	850	675	110	80
	2.5			ZA4410MX	850	675	110	80
	5.0			ZA4420MX	850	675	110	80
	10.0			ZA4440MX	850	675	110	80

1) Actual flow will vary with air supply

2) See valve section for hydraulic symbols and details



# ZA-Series Air Hydraulic Pump Ordering Matrix

## CUSTOM BUILD YOUR ZA4 AIR PUMP

▼ This is how a ZA-Series Pump model number is built up:



1	2	3	4	5	6	7	8	8	8	8
Product Type	Motor Type	Flow group	Valve Type	Usable oil capacity	Valve Operation	Voltage	Options	Options	Options	Options

### 1 Product Type

Z = Pump class

### 2 Motor Type

A = Air motor

### 3 Flow Group

4 = 80 in<sup>3</sup>/min@10,000 psi

### 4 Valve Type

- 0 = No valve with coverplate
- 2 = 3-way, 2-position (VM32)
- 3 = 3-way, 3-position (VM33)
- 4 = 4-way, 3-position (VM43)
- 6 = 3-way, 3-position, locking (VM33L)
- 7 = 3-way, 2-position (VM22)
- 8 = 4-way, 3-position, locking (VM43L)

### 5 Usable Oil Capacity

- 04 = 1.0 gallon
- 08 = 1.75 gallon
- 10 = 2.5 gallon
- 20 = 5.0 gallon
- 40 = 10.0 gallon

### 6 Valve Operation

- M = Manual valve
- N = No valve

### 7 Voltage

- X = Not applicable

### 8 Options

- (Specify in alphabetical order)
- F = Filter
  - G = 0-15,000 psi gauge (2 1/2")
  - H = Heat exchanger\*
  - K = Skidbar\*
  - N = No reservoir handles (includes lifting eyes; 2.5, 5, 10 gallon only)
  - R = Roll bars

\* (1 and 2 gallon reservoirs only)

### Ordering Example

**Model Number: ZA4208MX-FHK**

ZA4208MX-FHK is an air operated pump with a 3-way, 2-position manual valve, a 2.0 gallon reservoir, filter, heat exchanger and skid bar.

## ZA Series



Reservoir Capacity:




**1.0-10.0 gal.**

Flow at Rated Pressure:

**80 in<sup>3</sup>/min.**

Maximum Operating Pressure:

**10,000 psi**

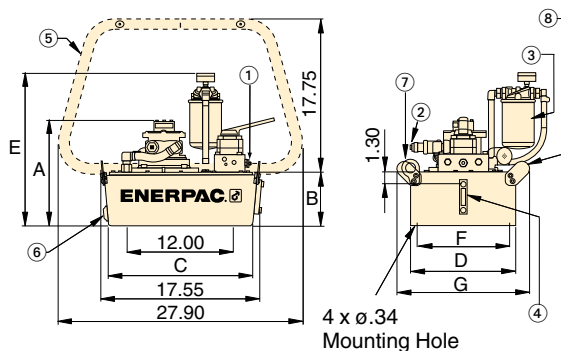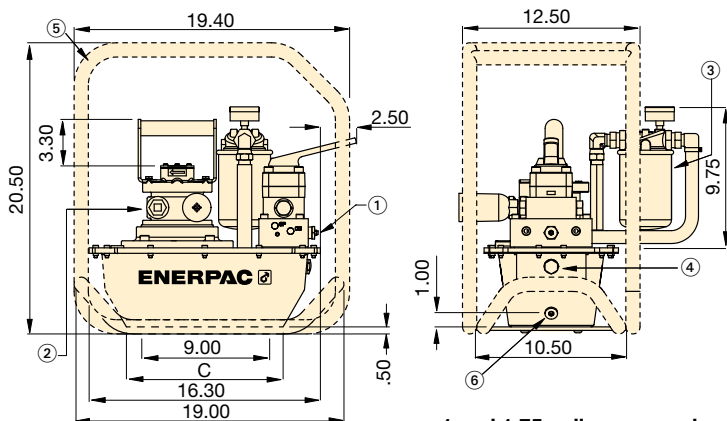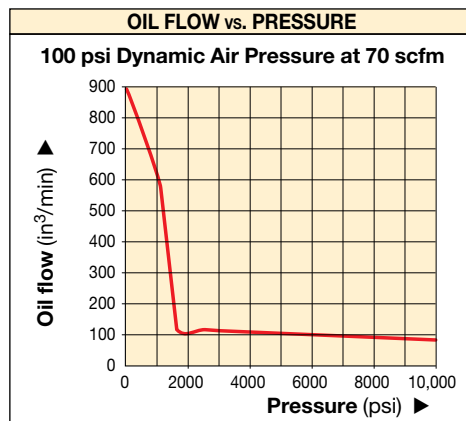

Dimensions (in)							Weight (incl. oil) (lbs)
A	B	C	D	E	F	G	
11.6	5.6	11.0	6.0	15.4	-	-	65.5
11.6	5.6	11.0	8.1	15.4	-	-	75.7
13.0	7.1	16.5	16.6	16.0	15.6	18.4	112.7
11.6	5.6	11.0	6.0	15.4	-	-	66.7
11.6	5.6	11.0	8.1	15.4	-	-	76.9
12.0	6.1	16.5	12.0	16.0	11.0	15.1	87.1
13.0	7.1	16.5	16.6	16.9	15.6	18.4	113.9
16.5	10.6	15.7	19.9	20.4	18.9	23.0	164.6

- ① User adjustable relief valve on all manual valves
  - ② Air inlet 1/2" NPTF
  - ③ Return Line Filter (optional)
  - ④ Oil Sight Gauge
  - ⑤ Roll Cage (optional)
  - ⑥ Oil Drain
  - ⑦ Lifting eyes (4) (optional)
  - ⑧ Handles
- Skid Bar (Model No. SBZ-4) (optional)

# ATP-Series Air Pump

▼ Shown: ATP-1500



## ATP Series

Reservoir Capacity:

**1.0 gallon**

Flow at Rated Pressure:

**4 in<sup>3</sup>/min.**


Maximum Operating Pressure:

**21,750 psi**




These products operate at ultra-high pressure, use only the specified fittings and hoses designed for these pressures.

**OIL FLOW vs. PRESSURE**

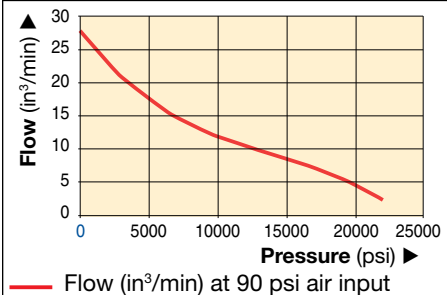

- General purpose, high pressure air driven pump unit for products requiring up to 21,750 psi hydraulic pressure
- Compact, lightweight, rugged steel frame for protection and easy handling
- Prelubricated pump element, does not require an airline lubricator
- Easily adjustable output pressure control
- Integrated and protected easy to read glycerin filled gauge
- Safety relief valve limits output pressure

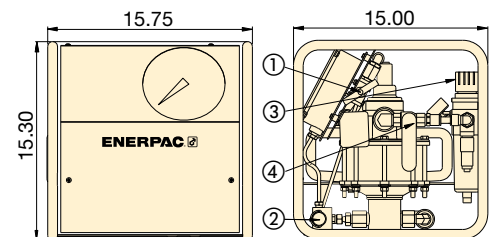

- ① HPT Shut-off Valve
- ② HPT Out Port
- ③ Filter/Regulator
- ④ Air On/Off Valve

### ▼ HOSES

Model Number	End 1	End 2	Length (ft)
<b>HT-1503</b>	1/4 BSPM 120° Cone	1/4 BSPM 120° Cone	3.28
<b>HT-1510</b>	1/4 BSPM 120° Cone	1/4 BSPM 120° Cone	9.84
<b>HT-1503HR*</b>	BH150	BR150	3.28
<b>HT-1510HR*</b>	BH150	BR150	9.84

\* Includes dust caps

### ▼ FITTINGS

Description	Complete Set	Female Half	Male Half
Quick Disconnect Coupler*	B150	BR150	BH150
Quick Disconnect Coupler and Adaptor Kit*	BW150AW	—	—
Quick Disconnect Blanking Coupler Set*	B150B	—	—

\* Includes dust caps

Pump Type	Useable Oil Capacity (gal)	Model Number	Pressure Rating (psi)	Output Flow Rate at 0 psi (in <sup>3</sup> /min)	Output Flow Rate at 21,750 psi (in <sup>3</sup> /min)	Air Pressure Range (psi)	Air Consumption (sfcm)	Sound Level (dBA)	Weight (lbs)
High pressure	1.0	<b>ATP-1500</b>	21,755	26	4	80-90	70	70	70

# Atlas Series Gasoline Pumps

▼ Shown from left to right: **PGM-2408R**



## PGM Series

Reservoir Capacity:

**1 gallon**

Flow at Rated Pressure:

**40 in<sup>3</sup>/min.**

Motor Size:

**4.2 Ft.lbs**

Maximum Operating Pressure:

**10,000 psi**



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the

System Components section for a full range of gauges.

Page: **124**



### Hoses



Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system,

specify only genuine Enerpac hydraulic hoses.

Page: **118**

### Patented Genesis Technology

- coaxial piston design ensures high performance
- first-stage piston pump for improved efficiency

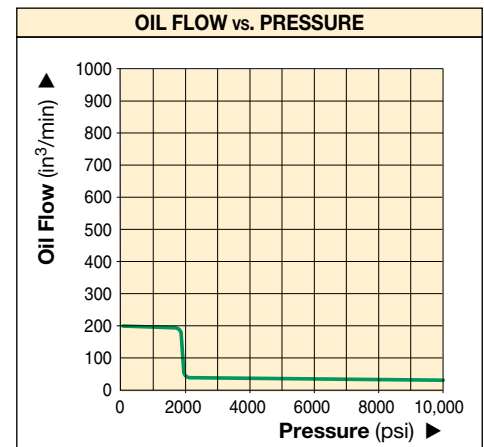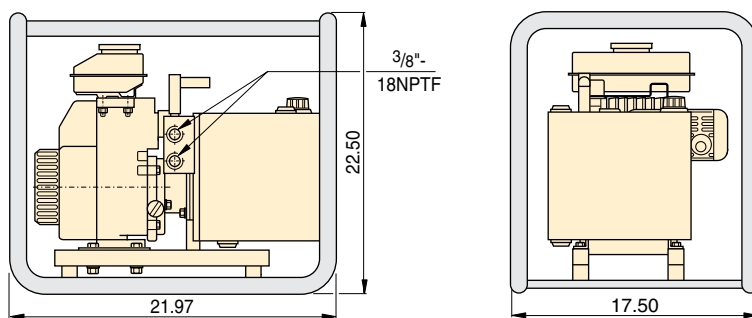

Used with Cylinder	Usable Oil Capacity (gal)	Model Number	Output Flow Rate** (in <sup>3</sup> /min)		Pressure Rating (psi)	Valve Type	Valve Function	Motor Manufacturer	Motor Size (Ft.lbs)	Weight (lbs)
			1 <sup>st</sup> stage	2 <sup>nd</sup> stage						
Single-acting	1.0	PGM-2304R*	200	40	10,000	3-way, 3-position	Advance/ Hold/Retract	Honda	4.2 at 3600 rpm	55
	2.0	PGM-2308R*	200	40	10,000	3-way, 3-position				72
Double-acting	1.0	PGM-2404R*	200	40	10,000	4-way, 3-position				55
	2.0	PGM-2408R*	200	40	10,000	4-way, 3-position				72

\* Note: PGM-20 Series are available with a carrying handle instead of a Roll Cage. For ordering omit the 'R' from the model number.

\*\* Nominal values—may vary based on motor speed.

# ZG5/ZG6 Gasoline Hydraulic Pumps

▼ Shown from left to right: ZG6440MX-BCFH, ZG5420MX-B



# Z

Tough.  
Dependable.  
Innovative.

## CLASS



### User Adjustable Relief Valve

All VM-Series directional valves have a user adjustable relief valve to allow the operator to easily set the optimum working pressure.



### High Pressure Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 118



### Other Options Available

The ZG5/ZG6 pumps are available in a wide range of configurations and options. Contact Enerpac for further information.

- Features **Z-Class** high efficiency pump design, higher oil flow and bypass pressure
- Two-speed operation reduces cycle time for improved productivity
- Full sight oil level glass on all reservoirs allow quick and easy oil level monitoring
- Sturdy wheeled cart for ZG6 allows transport over uneven terrain and features collapsible handles for easy storage
- Dual forced air heat exchangers on ZG6 stabilizes hydraulic oil temperature
- ZG5 is available in two 4-cycle engine sizes: 7.1 ft.lbs Honda and 8.5 ft.lbs Briggs & Stratton
- ZG6 has Briggs & Stratton 17 ft.lbs engine with electric start, pressurized oil and 16-amp charge output for accessories

### ▼ SELECTION CHART

Used with Cylinder	Usable Oil Capacity (gal)	Valve Model Number	Valve Function	Model Number	Motor Manufacturer*	Motor Size (Ft.lbs)	Weight (lbs)
Single-Acting	2.5	VM33	Advance/ Hold/ Retract	ZG5310MX-R	Honda	7.1	113.6
	5.0			ZG5320MX-R			140.9
Double-Acting	2.5	VM43		ZG5410MX-R			113.6
	5.0			ZG5420MX-R			141.0
Single-Acting	2.5	VM33		ZG5310MX-BR	Briggs & Stratton	8.5	111.0
	5.0			ZG5320MX-BR			138.3
Double-Acting	2.5	VM43		ZG5410MX-BR			111.1
	5.0			ZG5420MX-BR			138.4
	10.0	VM43	ZG6440MX-BCFH	17.0	334.0		


\*To order Briggs & Stratton motor, place a "B" suffix in the model number.

# Gasoline Hydraulic Pumps


## ZG5/ ZG6 Series



### ZG5

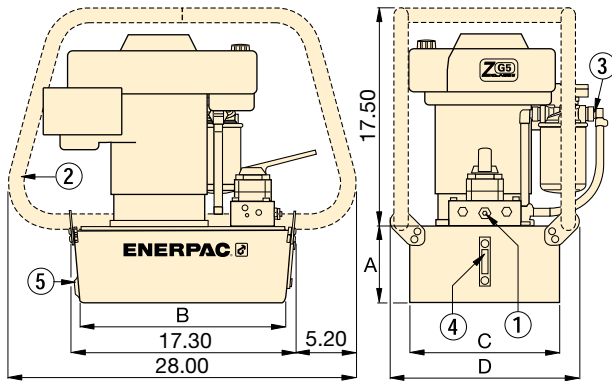

### ZG6

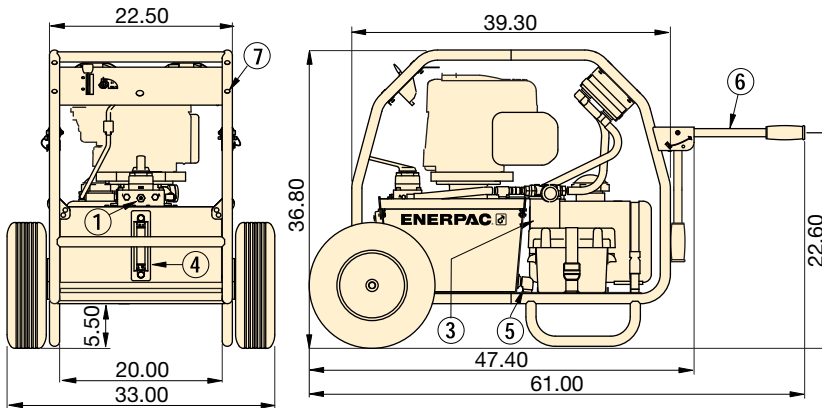


- ① User adjustable relief valve on all manual valves. 3/8" NPTF on A and B ports; 1/4" NPTF on auxiliary ports.
- ② Roll Bar (optional)
- ③ Return Line Filter (optional on ZG5, Standard on ZG6)
- ④ Oil Level Gauge
- ⑤ Oil Drain
- ⑥ Collapsible handles (ZG6 only)
- ⑦ Cart (standard on ZG6 only)

Reservoir Capacity:  
**2.5-10 gal.**

Flow at Rated Pressure:  
**100-200 in<sup>3</sup>/min.**

Engine Size:  
**7.1, 8.5 and 17.0 Ft.lbs**

Maximum Operating Pressure:  
**10,000 psi**

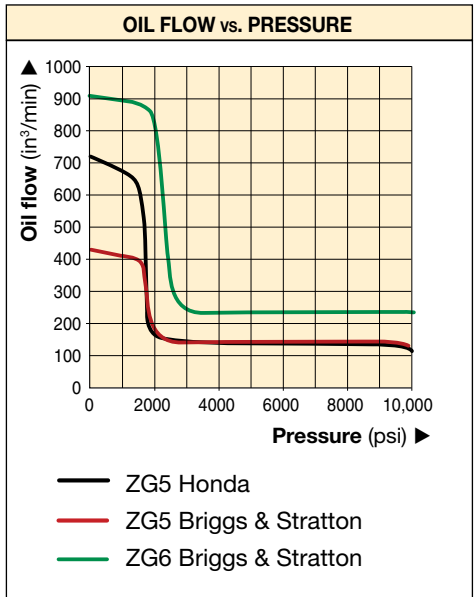

Motor Size		Output Flow Rate				Relief Valve Adjustment Range	Sound Level
		(in <sup>3</sup> /min)					
(Ft.lbs)	RPM	100 psi	700 psi	5,000 psi	10,000 psi	(psi)	(dBA)
7.1	2500	700	650	110	100	1000 - 10,000	88 - 93
8.5	3600	400	380	110	100		91 - 95
17.0	3600	900	885	225	200		91 - 95

ZG5 Dimensions (in)				
Reservoir Size	A	B	C	D
(gal)				
2.5	6.1	16.5	12.0	15.1
5.0	7.1	16.3	16.6	19.7
10.0	10.6	15.7	19.9	22.7

# 8000-Series Gasoline Pumps

▼ Shown: EGM-8418



## EGM Series

Reservoir Capacity:

**25 gal.**

Flow at Rated Pressure:

**1.5 gal/min.**

Motor Size:

**18 hp**

Maximum Operating Pressure:

**10,000 psi**





### Locking Valves

Pumps with VM-4 manual valves are available with VM-4L manual valves for positive load holding.


Add suffix "L" to pump model number.

Page: 110

- Industrial grade 18 hp twin-cylinder motor
- Panel mounted pressure gauge and adjustable relief valve for system pressure control
- Two-speed pump design with high by-pass pressure for rapid cylinder advance
- Built in oil temperature and oil level gauge
- External adjustable relief valve (1,200-10,000 psi) allows control of operating pressure without opening the pump
- Integral priming circuit guarantees quick starts after transport

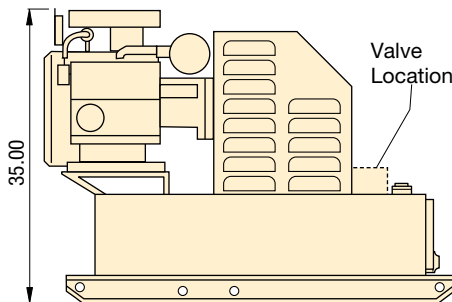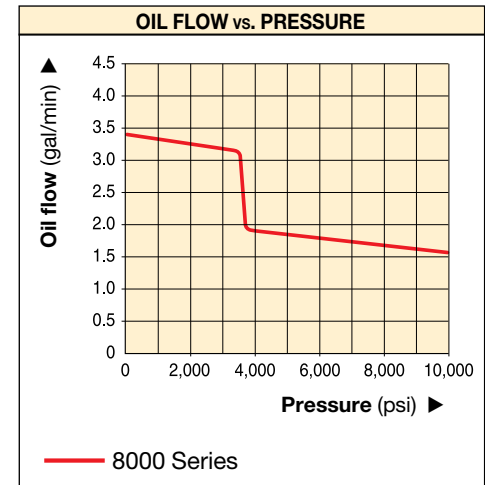

Side View

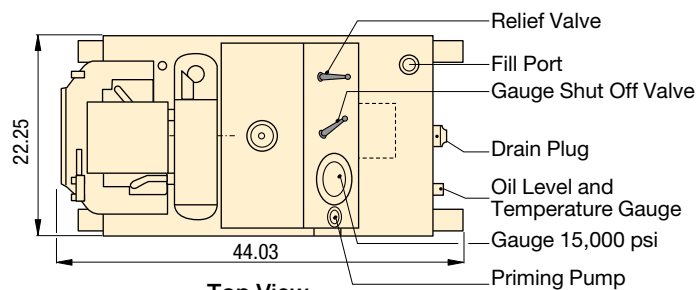

Top View




Used with Cylinder	Usable Oil Capacity (gal)	Model Number	Pressure Rating (psi)		Output Flow Rate (gal/min)		Valve Type	Valve Function	Sound Level (dBA)	Weight (lbs)
			1 <sup>st</sup> stage	2 <sup>nd</sup> stage	1 <sup>st</sup> stage	2 <sup>nd</sup> stage				
Single-acting	18	EGM-8218	3,700	10,000	3.4	1.5	3-way, 2-pos.	Adv./Retr.	94	890
Double-acting	18	EGM-8418	3,700	10,000	3.4	1.5	4-way, 3-pos.	Adv./Hold/Retr.	94	890

# Directional Control Valves Section Overview

**E**NERPAC hydraulic valves are available in a wide variety of models and configurations.

Whatever your requirements... directional control, flow control, or pressure control... you can be sure that Enerpac has the correct valve to match your application exactly.

Designed and manufactured for safe operation up to 10,000 psi, the range of Enerpac valves allows for direct pump mounting, remote mounting, manual or solenoid actuation, and in-line installation, giving you flexible solutions to control your hydraulic system.

Valve Type	Series		Page
Pump-Mounted Directional Control Valves	VM, VE		110 ▶
Remote-Manual Directional Control Valves	VC, VM, VE		112 ▶
Modular/Solenoid Operated Directional Control Valves	VE		114 ▶



### Valving Help

See Basic System Set-Up and Valve Information in our 'Yellow Pages'

Page: 244



▼ Shown from left to right: **VM32, VE33, VM33, VM43L, VE43-115**



- Advance/Retract and Advance/Hold/Retract operation of single-acting and double-acting cylinders
- Manual or solenoid operation
- Pump mounting will retrofit on most Enerpac pumps
- Available “locking” option on VM Series valves for load-holding applications
- Standard “locking” feature on VE Series 3-position valves

▼ *ZE4420SB-FH Z-Class pump is mounted next to an Enerpac H-frame press, includes VE43 electric valve to control cylinder operation.*



## For Reliable Control of Single and Double-Acting Cylinders

Valve Operation	Used with Cylinder	Valve Type	
Manual	Single-acting	3-Way 2 Position	
Manual	Single-acting	3-Way 2 Position	
Manual	Single-acting	3-Way 3 Position, Tandem Center	
Manual	Double-acting	4-Way 3 Position, Tandem Center	
Manual	Single-acting	3-Way 3 Position, Tandem Center, Locking	
Manual	Double-acting	4-Way 3 Position, Tandem Center, Locking	
Solenoid 24 VDC	Single-acting	3-Way 2 Position	
Solenoid 24 VDC	Single-acting	3-Way 2 Position, Dump	
Solenoid 24 VDC		3-Way, 3 Position, Tandem Center	
Solenoid 115 VAC	Single-acting	3-Way, 3 Position, Tandem Center	
Solenoid 24 VDC	Double-acting	4-Way, 3 Position, Tandem Center	
Solenoid 115 VAC	Double-acting	4-Way, 3 Position, Tandem Center	

For remote valve applications, see page 112.



# Pump Mounted Directional Control Valves



All valves feature several gauge ports for “system”, A port and B port pressure monitoring. User-adjustable relief valves are included on all models to allow the operator to easily set the optimum working pressure for each application. VM33 and VE43 valves include “System Check” feature, for more precise pressure holding and improved system control. The VM33 has improved porting which provides faster cylinder retraction while motor is running.

## VM, VE Series



Flow Capacity:

**4.5 gal/min.**

Maximum Operating Pressure:

**10,000 psi**



### Push-Button Control Station

VE33-115 and VE43-115 electric valves are supplied with IC400 control station. These valves include an 8 ft. power cord, and can be used on any Enerpac pump. They require a separate 115 volt power supply to operate.



### Locking Valves

For applications that require positive load holding, VM Series valves (except the VM22 and VM32 valve) are available with a pilot-operated check valve. This option provides hydraulic locking of the load until the valve is shifted into the retract position.

To order this feature, place an “L” at the end of the model number.



### Pendants for VE-Series Solenoid Valves

When ordering Enerpac VE-Series solenoid valves, the pendant must be ordered separately for Z-Class pumps. Pendant connection to be plugged into electric box of pump.

To be used with solenoid valves:	Pendant Model No.
VE32D	ZCP-1
VE32, VE33, VE43	ZCP-3

Model Number	Hydraulic Symbol	Schematic Flowpath			Weight (lbs)
		Advance	Hold	Retract	
VM22					5.6
VM32					5.6
VM33					6.7
VM43					6.8
VM33L					10.7
VM43L					10.8
VE32					8.7
VE32D					8.7
VE33					20.3
VE33-115					20.3
VE43					20.3
VE43-115					20.3

See page 113 for product dimensions.

▼ Shown from left to right: VC-20, VC-4L



## Reliable Remote Control



### Locking Valves

For applications that require positive load holding, VC and VM Series valves are available with a pilot-operated check valve. This option provides hydraulic locking of the load until the valve is shifted into the retract position.


- Advance/Hold/Retract operation for use with single-acting or double-acting cylinders

Valve Operation	Valve Type	Model Number	Hydraulic Symbol	Schematic Flowpath			Weight (lbs)
				Advance	Hold	Retract	
Manual	3-Way, 3 Position, Tandem Center	<b>VC-3</b>					6.4
Manual	3-Way, 3 Position, Tandem Center, Locking	<b>VC-3L</b>					10.3
Manual	3-Way, 3 Position, Closed Center	<b>VC-15</b>					6.4
Manual	3-Way, 3 Position, Closed Center, Locking	<b>VC-15L</b>					10.3
Manual	4-Way, 3 Position, Tandem Center	<b>VC-4</b>					6.4
Manual	4-Way, 3 Position, Tandem Center, Locking	<b>VC-4L</b>					10.3
Manual	4-Way, 3 Position, Closed Center	<b>VC-20</b>					6.4
Manual	4-Way, 3 Position, Closed Center, Locking	<b>VC-20L</b>					10.3

Return line kit included with remote valves


# Directional Control Valves Dimensions

Valve dimensions in inches.

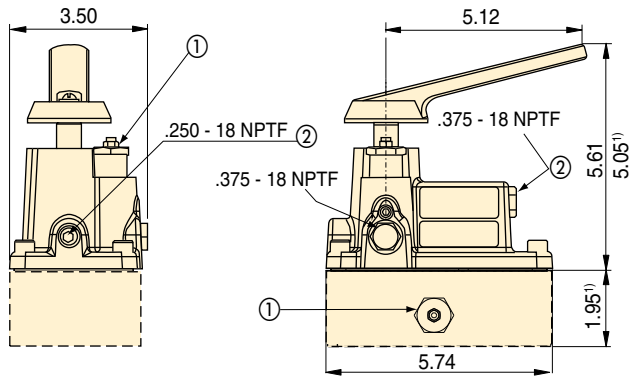

## VM22, VM32


<sup>1)</sup> VM22 only

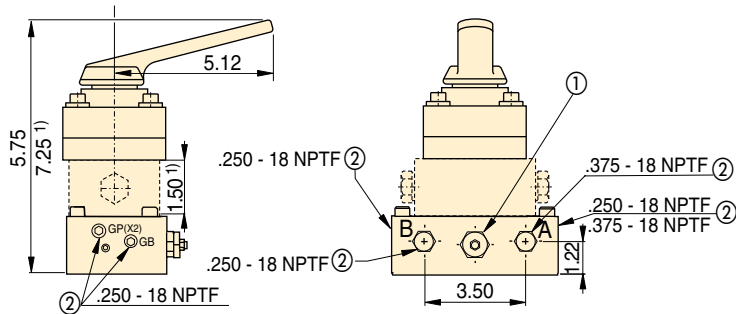

## VM33, VM33L


## VM43, VM43L

<sup>1)</sup> VM33L and VM43L only

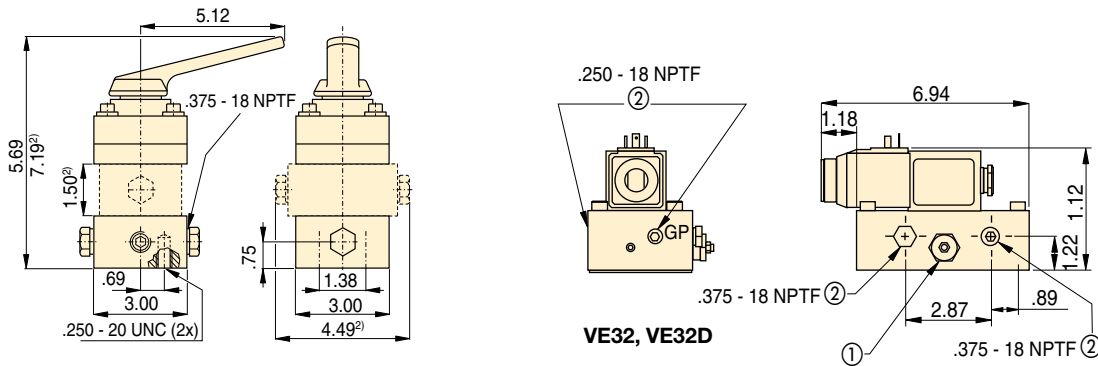

## VC3, VC3L, VC-15, VC15L, VC-4, VC4L, VC20, VC20L

<sup>2)</sup> VC3L, VC15L, VC4L and VC20L only

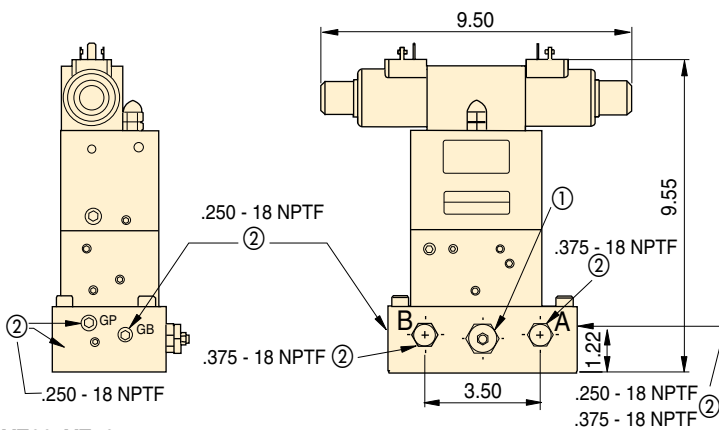

## VE33, VE43

## VC, VM, VE Series



Flow Capacity:

**4.5 gal/min.**


Maximum Operating Pressure:

**10,000 psi**



### User Adjustable Relief Valve

All VM- and VE-Series have a user adjustable relief valve to allow the operator to easily set the optimum working pressure.

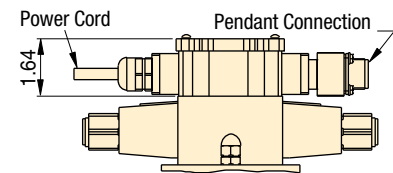

## VE33-115 VE43-115

- ① User Adjustable Relief Valve
- ② Auxiliary Port

▼ Shown top to bottom: VEC-15600D, VEK-15000B, VEC-15000B



- Ideal for independent control of multiple cylinders or functions
- Relief valve and pilot-operated check accessory valves are stackable between manifold and valve body
- Remote and pump mounting

## Unmatched Combinations and Possibilities



### 3-Way Check Valve

Use a **VS-51** 3-way pilot operated check valve assembly to convert your 3-way modular valve into a load-holding valve.




### 4-Way Check Valve

Use a **VS-61** 4-way pilot operated check valve assembly to convert your 4-way modular valve into a load-holding valve.



### System Pressure Control

To add system pressure control to your modular valve, order **VS-11 Relief Valve** assembly.



### Bolt Kits for Accessory Valves With No Manifold

Order Bolt Kit **BK-2** when adding one of the accessory valves. Order Bolt Kit **BK-3** when adding any combination of two accessory valves.

Valve Flow Path	Used with Cylinder	Valve Code	Hydraulic Symbol
4-Way, 3-Position (4/3) Open Center	Double-acting	<b>A</b>	
4-Way, 3-Position (4/3) Closed Center	Double-acting	<b>B</b>	
4-Way, 3-Position (4/3) Tandem Center	Double-acting	<b>C</b>	
4-Way, 3-Position (4/3) Float Center	Double-acting	<b>D</b>	
4-Way, 2-Position (4/2) Crossover Offset	Double-acting	<b>E</b>	
3-Way, 3-Position (3/3) Tandem Center	Single-acting	<b>F</b>	
3-Way, 3-Position (3/3) Closed Center	Single-acting	<b>G</b>	
2-Way, 2-Position (2/2) Normally Closed	System	<b>H*</b>	
2-Way, 2-Position (2/2) Normally Open	Un-loading	<b>K*</b>	
4-Way, 2-Position (4/2) Float Offset	Double-acting	<b>M</b>	
3-Way, 2-Position (3/2) Normally Open	Single-acting	<b>P</b>	

\* Requires use of tank port for dump or unloading

### How to order one of the 1,300 possible model numbers?

With over 1,300 possible model numbers, Enerpac has the perfect valve for you. Use the "chart" to build your own valve for the specific application you require. This is the complete guide to all the Modular valves that are available.

# Solenoid Operated Modular Valves

## CUSTOM BUILD YOUR MODULAR VALVES

▼ This is how a Modular Valve Model Number is built up:



1 Solenoid Operated Valve  
 2 Valve Flow Path  
 3 Flow Capacity  
 4 Voltage  
 5 Accessory Valves  
 6 Manifold

### 1 Product Type

**VE** = Solenoid Operated Valve

### 2 Valve Code

- A** = 4/3 Open Center
- B** = 4/3 Closed Center
- C** = 4/3 Tandem Center
- D** = 4/3 Float Center
- E** = 4/2 Crossover Offset
- F** = 3/3 Tandem Center
- G** = 3/3 Closed Center
- H** = 2/2 Normally Closed
- K** = 2/2 Normally Open
- M** = 4/2 Float Offset
- P** = 3/2 Normally Open

### 3 Flow Capacity

**1** = 4 gallons per minute

### 4 Voltage

- 1** = 24 VDC
- 2** = 220/240 V, 1 ph, 50 Hz
- 5** = 115 V, 1 ph, 60 Hz
- 6** = 230 V, 1 ph, 60 Hz

### 5 Accessory Valves


- 000** = No accessory valves
- 100** = Relief Valve only
- 150** = Relief Valve and 3-way pilot operated check valve  
**Only for VEF/VEG**
- 160** = Relief Valve and 4-way pilot operated check valve  
**Only for VEA/VEB/VEC/VED**
- 500** = 3-way pilot operated check valve  
**Only for VEF/VEG**
- 600** = 4-way pilot operated check valve  
**Only for VEA/VEB/VEC/VED**

### 6 Manifold

- A** = No manifold\*\*
- B** = Remote Mounted
- D** = Pump Mounted\*

\* Only for valve code: **VEA/VEC/VEF**  
 \*\* Must order Bolt Kit separately.

Valve dimensions in inches.

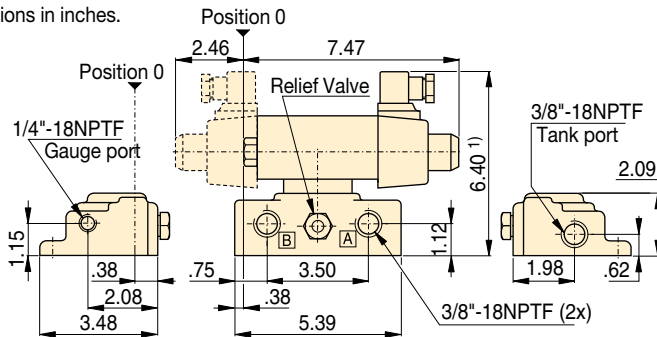

Modular Valve Pump Mounted

<sup>1)</sup> add 1.85 inch for each Accessory Valve

Maximum Operating Pressure (psi)	Amperage Draw			Seal Material	Valve Plug
	24 VDC	115 VAC 60 Hz	230 V 60 Hz		
0 - 10,000	N/A inrush	3.6 A inrush	1.8 A inrush	Buna-N, Polyurethane	DIN 43650
	2.5 A Holding	1.0 A Holding	.5 A Holding		

## VE Series



Flow Capacity:


**4 gal/min.**

Maximum Operating Pressure:

**10,000 psi**


### Example: VEA-15600-D

VEA-15600-D is a Modular Valve with a 4-way, 3-position open center flowpath, 115 VAC, and an integral pilot-operated check valve, for mounting on an Enerpac pump.

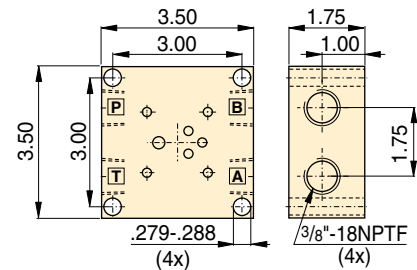

Modular Valve Remote Mount Manifold

### Pressure Drop versus Oil Flow

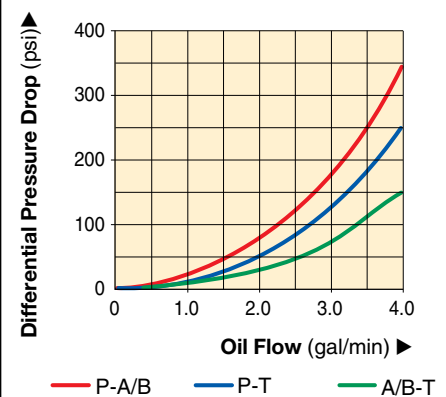

## ENERPAC System Components —

All the additional components you need to complete your high pressure hydraulic system. Engineered to work with your Enerpac cylinders, pumps and tools.

All Enerpac components are designed and manufactured to the most exacting standards.

With this complete line of hydraulic hoses, couplers, fittings, manifolds, oil and gauges Enerpac has the accessories to compliment your system and ensure the efficient operation, long life, and safety of your hydraulic equipment.



### Yellow Pages

For sample system set-ups and how to correctly specify your system components, please view the Enerpac **Yellow Pages**.

Page:  241














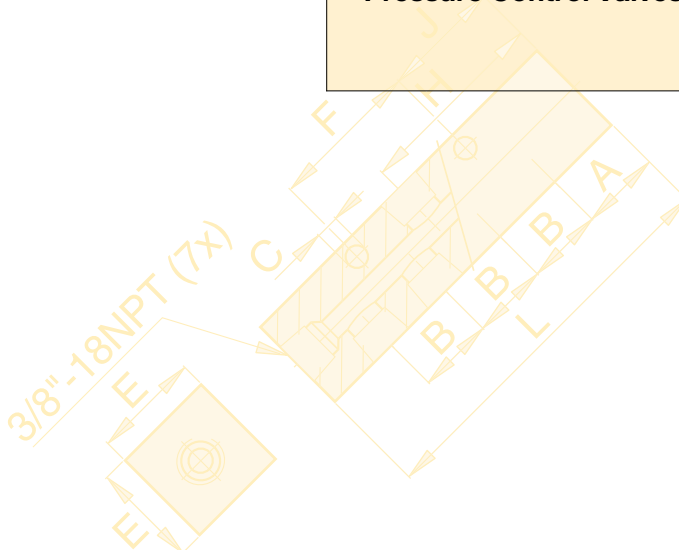



### Maintain System Integrity

Use Enerpac System Components, designed to interface with Enerpac Cylinders, Pumps and Tools to ensure your system operates at peak performance.



# System Components and Control Valves Section Overview

Component Type	Series		Page
Hoses	700 900		116 ▶
Couplers	A, C, F, Z		118 ▶
Hydraulic Oil	HF LX		120 ▶
Manifolds	A AM		120 ▶
Fittings	FZ		121 ▶
Hydraulic Force & Pressure Gauges	GF GP		122 ▶
Hydraulic Pressure Gauges	G, H		124 ▶
Test System Gauges	T		128 ▶
Digital Gauges	DGR		129 ▶
Gauge Accessories	GA, NV, V		130 ▶
Pressure Control Valves	V		132 ▶



▼ Shown from top to bottom: HC-7206, HC-7210, HC-9206



## Emphasize Safety and Quality



To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

### WARNING !

- Do not exceed 10,000 psi maximum pressure.
- Do not handle hoses while under pressure.

More safety instructions in our "Yellow Pages".

Page: 241

**Crimped-on rubber strain relief for improved life and durability on all models.**

### Thermo-plastic Hoses (700-Series)

- For demanding applications, featuring a 4:1 design factor
- Maximum working pressure of 10,000 psi
- Two layers of steel wire braids
- Outside jacket is polyurethane, to provide maximum abrasion resistance
- Exhibits low volumetric expansion under pressure to enhance overall system efficiency

### Heavy-duty Rubber Hoses (900-Series)

- The most complete offering: 35 models up to 50 feet in length
- Rubber coated with two layers of steel wire braids
- Designed to comply with Material Handling Institute IJ-100 hose specification
- Flexible, with little "memory", is the best choice for long hose runs



◀ To prevent back pressure and to increase cylinder retraction speed, when using long hoses, the Enerpac HC-7300 range of hoses with increased internal diameter is the best choice.

### ▼ Hose End Couplings

1/4" NPTF	
3/8" NPTF	
A-604	
A-630	
AH-604	
AH-630	
C-604	
CH-604	



# High Pressure Hydraulic Hoses

**700  
900  
Series**



Inside Diameter:

**.25 and .38 inch**

Length:

**2-50 feet**

Maximum Operating Pressure:

**10,000 psi**

Internal Dia. (in)	Hose End Assemblies and Couplers*		Hose Length (ft)	700-Series Thermo-plastic		900-Series Heavy-duty Rubber		
	End one	End two		Model Number	Wt. (lbs)	Model Number	Wt. (lbs)	
<b>.25</b>	<b>1/4" NPTF</b>	<b>1/4" NPTF</b>	6	-		<b>H-9206Q</b>	2.6	
		<b>3/8" NPTF</b>	6	-		<b>H-9206S</b>	2.6	
		<b>A-630</b>	6	<b>HB-7206QB</b>	2.4	<b>HB-9206QB</b>	3.1	
		<b>AH-630</b>	6	-		<b>HB-9206Q</b>	2.9	
		<b>CH-604</b>	6	<b>HC-7206Q</b>	2.3	<b>HC-9206Q</b>	3.0	
	<b>3/8" NPTF</b>			2	<b>H-7202</b>	1.2	<b>H-9202</b>	1.6
				3	<b>H-7203</b>	1.5	<b>H-9203</b>	1.9
				6	<b>H-7206</b>	2.0	<b>H-9206</b>	2.6
				10	<b>H-7210</b>	3.0	<b>H-9210</b>	3.9
				20	<b>H-7220</b>	6.2	<b>H-9220</b>	8.0
				30	<b>H-7230</b>	10.0	<b>H-9230</b>	13.0
				50	<b>H-7250</b>	15.4	<b>H-9250</b>	22.0
			<b>A-604</b>		-		-	
				6	<b>HA-7206B</b>	2.5	<b>HA-9206B</b>	3.2
				10	-		<b>HA-9210B</b>	4.5
				-		-		-
				3	-		<b>HA-9203</b>	2.1
		<b>AH-604</b>		6	<b>HA-7206</b>	2.2	<b>HA-9206</b>	2.9
			10	<b>HA-7210</b>	3.2	<b>HA-9210</b>	4.2	
			6	<b>HB-7206</b>	2.2	<b>HB-9206</b>	2.9	
	<b>AH-630</b>		3	<b>HC-7203B</b>	2.2	<b>HC-9203B</b>	2.9	
			6	<b>HC-7206B</b>	2.8	<b>HC-9206B</b>	3.7	
			10	<b>HC-7210B</b>	3.9	<b>HC-9210B</b>	5.0	
	<b>C-604</b>		3	<b>HC-7203</b>	1.7	<b>HC-9203</b>	2.2	
			6	<b>HC-7206</b>	2.3	<b>HC-9206</b>	3.0	
			10	<b>HC-7210</b>	3.3	<b>HC-9210</b>	4.3	
			20	<b>HC-7220</b>	6.4	<b>HC-9220</b>	8.3	
	<b>CH-604</b>	<b>CH-604</b>	6	<b>HC-7206C</b>	2.4	<b>HC-9206C</b>	3.1	
50			<b>HC-7250C</b>	15.4	<b>HC-9250C</b>	20.0		
<b>.38</b>	<b>3/8" NPTF</b>		6	<b>H-7306</b>	3.5	<b>H-9306</b>	4.6	
			10	<b>H-7310</b>	5.4	<b>H-9310</b>	7.0	
			20	<b>H-7320</b>	10.0	<b>H-9320</b>	13.0	
			30	<b>H-7330</b>	16.2	<b>H-9330</b>	21.0	
			50	<b>H-7350</b>	15.2	<b>H-9350</b>	33.0	
		<b>CH-604</b>		6	<b>HC-7306</b>	3.4	<b>HC-9306</b>	4.9
				-		-	<b>HC-9308</b>	6.2
				10	<b>HC-7310</b>	5.6	<b>HC-9310</b>	7.3
				20	<b>HC-7320</b>	11.2	<b>HC-9320</b>	14.6

\* For technical information on couplers see next page.



### Torque Wrenches Hoses

Use Enerpac 3.5:1 twin safety hoses with double-acting wrenches to ensure the integrity of your hydraulic system. See Selection Matrix.

Page: 210



### Fittings

For additional fittings see the fitting page of the System Components section.

Page: 123



### Hose Oil Capacity

When using long hose lengths, it is sometimes necessary to fill the pump reservoir after filling the hoses. To determine the hose oil capacity, use the following:

For .25" internal diameter hoses:  
Capacity (in<sup>3</sup>) = .5892 x Length (ft)

For .38" internal diameter hoses:  
Capacity (in<sup>3</sup>) = 1.3608 x Length (ft)

▼ Shown: FH-604, FR-400, A-630 disassembled, C-604, AH-604, AR-400



## Quick Connection of Hydraulic Lines



### Thread Sealer

To seal NPTF threads use one of the new anaerobic thread sealers or Teflon paste.

When using Teflon tape, apply the tape one thread back from the end of a fitting to prevent it from entering the hydraulic system.



### WARNING!

**Couplers should be pressurized only when completely connected, and should not be coupled or uncoupled when pressurized.**

More safety instructions in our "Yellow Pages".

Page: 243



### S- and W-Series Torque Wrench Couplers

S- and W-Series Torque Wrenches require 1/4" spin-on couplers and THQ hoses.

Page: 204

### 3/8" High Flow Couplers

- Standard equipment on most Enerpac cylinders
- Recommended for use on all Enerpac pumps and cylinders where space and porting permits
- Include "2-in-1" dust cap for use on male and female coupler halves

### 3/8" High Flow "Flush-face" Couplers

- Featuring "Push-to-connect" operation, to guarantee good connection every time
- Flush-face, zero-leak operation for minimal spillage
- HTMA\* recognized for safety and performance

### 3/8" Regular Spee-D-Coupler®

- For medium duty applications; for use with hand pumps
- Includes female steel dust cap

### 1/4" Regular Coupler

- For use with small cylinders and hand pumps
- Includes female steel dust cap

\* Hydraulic Tool Manufacturers Association

▼ With the use of Enerpac High Flow Couplers, hoses are easily installed for multiple hydraulic line connections in this 34 points PLC-controlled lifting system.



# Hydraulic Couplers



## F-Series

Flush-faced couplers provide reduced pressure drop versus other types and are preferred in dirty, grimy construction and mining environments due to easy clean, non-dirt trapping faces.



## Metal Dust Caps

Steel dust caps are available for the C-604 series couplers. Order model number: **CD-411M** for female half **CD-415M** for male half


## A C F Series




Maximum Flow Capacity:  
**2,500 in<sup>3</sup>/min.**

Thread:  
**1/4" and 3/8" NPTF**


Maximum Operating Pressure:  
**10,000 psi**

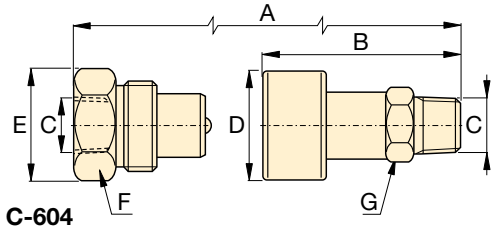

C-604

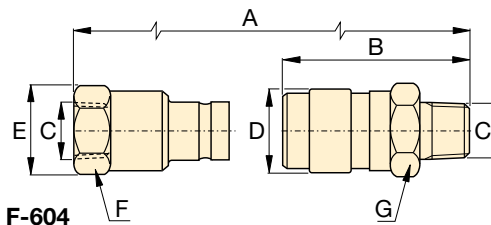

F-604

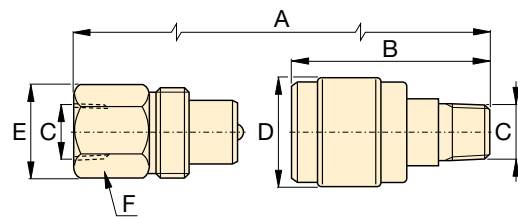

A-604, A-630







## CT-604 Safety Tool

Use the Enerpac CT-604 to relieve hydraulic back pressure by safely bleeding the hydraulic coupler. Minimize injuries from

projectile parts and under-skin hydraulic fluid injections by eliminating unsafe coupler bleeding practices. The CT-604 is Enerpac-engineering safe for use at 10,000 psi (700 bar).

NOTE: C-Series only.

Maximum Flow Capacity (in <sup>3</sup> /min)	Coupler Type	Model Numbers			Dimensions (in)							Dust Cap(s)
		Complete Set	Female Half	Male Half	A*	B	C	D	E	F	G	
2,500	High Flow Coupler 	C-604	CR-400	CH-604	3.26	2.87	3/8" NPTF	1.38	1.38	1.25	1.00	(2x) CD-411 Included
2,500	Flush-face coupler 	F-604	FR-400	FH-604	4.36	2.85	3/8" NPTF	1.23	1.23	1.06	1.12	-
462	Regular Spee-D-Coupler® 	A-604	AR-400	AH-604	3.09	2.53	3/8" NPTF	1.12	.94	.94	.73	Z-410 female only Included
462	Regular Coupler 	A-630	AR-630	AH-630	2.61	1.72	1/4" NPTF	.87	.81	.75	.57	Z-640 female only Included

\* Value A is total length when male and female halves are connected.

▼ Shown top to bottom: HF-101, HF-100, HF-102, LX-101, A65, and FZ1055



## Genuine Enerpac System Components

Hydraulic Oil		Highviscosity index ensures maximum lubricity over a wide range of operation temperatures.
Contents	Model Number	
1 Quart	<b>HF-100</b>	
1 Gallon	<b>HF-101</b>	
5 Gallons*	<b>HF-102</b>	
55 Gallons	<b>HF-104</b>	
1 Gallon**	<b>LX-101</b>	

\* Packed in two 2½ gallon cans.

\*\* Hand pump oil.

### HF Oil

- Specially formulated for power pumps
  - maximum volumetric efficiency
  - maximum heat transfer
  - prevents cavitation
  - anti-sludge, anti-rust, anti-foam additives
- Maximum film protective lubricity
  - anti-oxidation additives

### LX Hand Pump Oil

- Specially formulated for hand pumps
  - anti-sludge, anti-rust additives
- Reduced handle effort over HF oil
  - good low temperature performance
- Not for use in power pumps

### ▼ Oil Specifications Chart

	LX Oil	HF Oil
ISO Grade	15	32
Viscosity Index	101 min	100 min
Viscosity at 210 °F	3.2/3.7 S.U.S.	42/45 S.U.S.
Viscosity at 100 °F	13.5/16.5 S.U.S	150/165 S.U.S.
Viscosity at 0 °F	<2100 S.U.S.	<12000 S.U.S.
API Gravity	31.0/35.0	31.0/33.0
Flash, C.O.C. °F	370	375
Pour Point, °F	-30	-25
Paraffinic Base Color	Yellow	Blue

NOTE: SAE grades do not apply to hydraulic oil.

## Manifolds

Description		Model No.	Dimensions (in)
<b>7" Long Manifold</b> with 7 female ports.		<b>A-64</b>	
<b>14" Long Manifold</b> that allows direct mounting of control valves to the manifold. 7 female ports.		<b>A-65</b>	
<b>6-Port Hexagon Manifold</b> Plugs furnished for all ports ⅜"-18 NPTF.		<b>A-66</b>	
<b>Premounted Manifold</b> Functions as split-flow valve to control 2 to 4 single-acting cylinders simultaneously. All ports ⅜"-18 NPTF.		<b>AM-21</b> <b>AM-41</b>	

# Hydraulic Oil, Manifolds and Fittings

## Recommended Tubing for Hand Plumbing Applications

Enerpac does not supply high-pressure pipe or tubing but recommends the use of cold drawn steel tubing instead of regular pipe in the following dimensions:

In place of 1/4" pipe use 3/8" tubing with a 0.065" minimum wall thickness.

For 3/8" pipe use schedule 80 as a minimum or 1/2" with a 0.095" minimum wall thickness.

For 1/2" pipe use schedule 80 as a minimum or 3/4" tubing with a 0.135" minimum wall thickness.

All tubing wall thicknesses based on a 55,000 psi minimum tensile strength.

**A, AM  
FZ,  
HF, LX  
Series**



Description		Model Number	Dimensions (in)				Diagram				
			A	B	C	D					
<b>Street Elbow</b> From: 3/8"-NPTF Male To: 3/8"-NPTF Female		<b>FZ-1616</b>	.94	1.30	3/8"-18 NPTF	3/8"-18 NPTF					
<b>Reducing Connector</b> From: 3/8"-NPTF Female To: 1/4"-NPTF Female		<b>FZ-1615</b>	1.13	1.00	3/8"-18 NPTF	1/4"-18 NPTF					
From: 1/2"-NPTF Female To: 3/8"-NPTF Female		<b>FZ-1625</b>	1.88	1.14	1/2"-18 NPTF	3/8"-18 NPTF					
<b>Hex Nipple</b> From: 1/4"-NPTF Male To: 1/4"-NPTF Male		<b>FZ-1608</b>	1.50	.63	1/4"-18 NPTF	1/4"-18 NPTF					
From: 3/8"-NPTF Male To: 3/8"-NPTF Male		<b>FZ-1617</b>	1.47	.75	3/8"-18 NPTF	3/8"-18 NPTF					
<b>Coupling</b> From: 3/8"-NPTF Female To: 3/8"-NPTF Female		<b>FZ-1614</b> <b>FZ-1605</b>	1.13 1.13	1.00 .75	3/8"-18 NPTF 1/4"-18 NPTF	3/8"-18 NPTF 1/4"-18 NPTF					
<b>Cross</b> From: 3/8"-NPTF Female To: 3/8"-NPTF Female		<b>FZ-1613</b>	1.77	1.00	3/8"-18 NPTF	-					
<b>Tee</b> From: 3/8"-NPTF Female To: 3/8"-NPTF Female		<b>FZ-1612</b>	1.77	1.00	3/8"-18 NPTF	-					
<b>Elbow</b> From: 3/8"-NPTF Female To: 3/8"-NPTF Female		<b>FZ-1610</b>	1.38	.88	3/8"-18 NPTF	-					
<b>Bushing</b> From: 3/8"-NPTF Male To: 1/4"-NPTF Female		<b>FZ-1630</b>	.75	.75	1/4"-18 NPTF	3/8"-18 NPTF					
<b>Swivel Fitting</b> From: 3/8"-NPTF Male To: 3/8"-NPTF Female		<b>FZ-1660</b>	1.56	.88	3/8"-18 NPTF	3/8"-18 NPTF					
<b>Adaptor</b> Female	Male										
3/8"-18 NPTF	1/4"-18 NPTF						<b>FZ-1055</b>	1.75	.94	1/4"-18 NPTF	3/8"-18 NPTF
1/2"-14 NPTF	1/4"-18 NPTF						<b>FZ-1633</b>	1.69	1.13	1/4"-18 NPTF	1/2"-14 NPTF
1/2"-14 NPTF	3/8"-18 NPTF	<b>FZ-1634</b>	1.69	1.13	3/8"-18 NPTF	1/2"-14 NPTF					

▼ Shown: GF-871P, GP-10S



- GF-Series gauges are calibrated with dual scale reading for pressure and force
- Excellent readability; 4 inch diameter gauge face
- Fast, easy installation
- GF-Series gauges are glycerine filled
- Stainless steel gauge cases for corrosion resistance
- GP-Series gauges are calibrated with dual scale reading for psi and bar

▼ A GP-10S gauge is used on this press to check the hydraulic pressure required to bend flat steel bar.



## Visual References for System Pressure and Force



### Auto-Damper Valve

For automatic control of gauge fluctuations, the V-10 Auto-Damper Valve controls the movement of the gauge needle by restricting oil flow in and out of the gauge. No adjustments needed.

Page: 133



### Snubber Valve

Infinitely adjustable for metering oil out of a gauge. The V-91 Snubber Valve is also suitable as a shut-off valve to protect the gauge during high cycle applications

Page: 133

Used With	
	All Cylinders
	All Cylinders
	All 5 ton RC Cylinders
	All 10 ton RC Cylinders
	All 25 ton RC Cylinders
	RC and RR 50 ton Cylinders
	12 ton RCH-Series
RCH/RRH-20, 30 and 60 ton	
RCS-201, 302	
RCS-502, 1002	
	25 ton Presses
	50 ton Presses
	25-50 ton Presses
	100 ton Presses
	150-200 ton Presses

# Hydraulic Force and Pressure Gauges



## Maximum Indicator Pointer

Indicator retains peak readings of pressure or force generated by the system.

Order model number: **H-4000G**.

Can easily be installed on GP-Series dry gauges.



## Load Gauges

To measure external load supported by a cylinder or jack. For pressing parts together under pre-determined loads, weighing, testing, etc.

## Pressure Gauges

To measure the input pressure into cylinders, jacks or high pressure systems. Also for all testing applications.

**GP-Series** gauges are dry gauges.

**GF-Series** gauges are glycerine filled.

## GF GP Series



Pressure Range:

**0-15,000 psi**


Face Diameter:

**4 inch**

Accuracy, % of full scale:

**± 1%**

## All Models



## Gauge Type and Calibration



psi		bar		psi		lbs		tons	
0-10,000	0-700	-	-	-	-	-	-	-	-
0-15,000	0-1000	-	-	-	-	-	-	-	-
-	-	0-10,000	0-10,000	0-5	100 psi, 100 lbs, .1 ton	<b>GF-5P</b>	1/2 NPTF	●	●
-	-	0-10,000	0-22,200	0-11	100 psi, 200 lbs, .2 ton	<b>GF-10P</b>	1/2 NPTF	●	●
-	-	0-10,000	0-51,500	0-25.5	100 psi, 500 lbs, .5 ton	<b>GF-20P</b>	1/2 NPTF	●	●
-	-	0-10,000	0-110,000	0-55	100 psi, 1000 lbs, 1 ton	<b>GF-50P</b>	1/2 NPTF	●	●
-	-	0-10,000	0-27,000	0-13.5	100 psi, 200 lbs, .25 ton	<b>GF-120P</b>	1/2 NPTF	●	●
-	-	0-10,000	-	0-23.5/36/65	100 psi, .5/.5/1 ton	<b>GF-813P</b>	1/4 NPTF		●
-	-	0-10,000	-	0-22/32	100 psi, .5/.5 ton	<b>GF-230P</b>	1/2 NPTF	●	●
-	-	0-10,000	-	0-50/100	100 psi, 1/1 ton	<b>GF-510P</b>	1/2 NPTF	●	●
-	-	0-10,000	0-51,500	0-25.5	100 psi, 500 lbs, .5 ton	<b>GF-20P</b>	1/2 NPTF	●	●
-	-	0-10,000	0-11,000	0-55	100 psi, 1000 lbs, 1 ton	<b>GF-50P</b>	1/2 NPTF	●	●
-	-	0-10,000	-	0-25.5/32.5/55	100 psi, .5/.5/.5 ton	<b>GF-835P</b>	1/4 NPTF		●
-	-	0-10,000	-	0-79/103	100 psi, 1/1 ton	<b>GF-871P</b>	1/4 NPTF		●
-	-	0-10,000	-	0-150/200	100 psi, 5/5 ton	<b>GF-200P</b>	1/4 NPTF		●

## Units per Division

## Model Number\*

## Thread C

## Gauge Adaptor



## Required

(in) GA-1 GA-2 GA-3

\* Metric scale Force Gauges are available by changing the "P" suffix to "B".

▼ Shown: H-4049L, G-2534R, G-4089L, G-2535L, G-4040L



## Visual References for System Pressure

### Glycerine Filled (G-Series)

- Calibrated in dual scale reading in psi and bar
- All pressure sensing parts sealed and dampened by glycerine for long life
- Includes safety blow-out disk and pressure equalizing membrane
- Gauge snubbers or needle valves recommended for high cycle applications

### High Cycle (H-Series)

- Calibrated in dual scale reading in psi and bar
- Ideal for use in many applications, specifically for high cycle and harsh environments
- Gauge snubbers or needle valves recommended to shut off gauge when not in use



#### **Gauge Adaptor**

For easy gauge installation into almost any system, Enerpac offers a complete line of gauge adaptors.

Page: 130



#### **Snubber Valve**

Infinitely adjustable for metering oil out of a gauge. The V-91 Snubber Valve is also suitable as a shut-off valve to protect the gauge during high-cycle applications.


Page: 133



◀ When lifting or pressing, always use a gauge. A gauge is your "window" to the system—it lets you see what's going on.



# Hydraulic Pressure Gauges

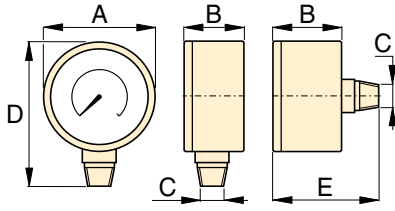

Dimensions (in)						
Face Diam.	Connection	A	B	C	D	E
2.5	Lower Mount	2.50	1.46	¼ NPTF	3.31	–
2.5	Center Rear	2.50	1.46	¼ NPTF	–	2.48
4.0	Lower Mount	4.0	1.15	¼ NPTF	4.80	–
4.0	Lower Mount	4.0	1.93	½ NPTF	5.38	–

Note: dimensions for reference only.

**G  
H  
Series**



Pressure Range:  
**0-15,000 psi**

Face Diameter:  
**2.5-4 inches**

Accuracy, % of full scale:  
**±1% and 1½%**



**Maximum Indicating Pointer**

Indicator retains peak readings of pressure or force generated by the system.

Order model number: **H-4000G**.

Note: For use on H-Series gauges only.

## ▼ SELECTION CHART

Gauge Series	Pressure Range		Model Number				Major Graduation		Minor Graduation		Major Graduation		Minor Graduation	
			Face ø 2.5" ¼ NPTF Lower Mount	Face ø 2.5" ¼ NPTF Center Rear	Face ø 4" ¼ NPTF Lower Mount	Face ø 4" ½ NPTF Lower Mount								
			Accuracy ±1½%	Accuracy ±1½%	Accuracy ±1%	Accuracy ±1%	psi				bar			
	(psi)	(bar)					(2.5")	(4")	(2.5")	(4")	(2.5")	(4")	(2.5")	(4")
<b>G-Series</b>	0-100	0-7	<b>G2509L</b>	–	–	–	10	–	2	–	1	–	.01	–
	0-160	0-11	<b>G2510L</b>	–	–	–	10	–	2	–	1	–	.02	–
	0-200	0-14	<b>G2511L</b>	–	–	–	50	–	5	–	1	–	.02	–
	0-300	0-20	<b>G2512L</b>	–	–	–	50	–	5	–	5	–	.50	–
	0-600	0-40	<b>G2513L</b>	–	–	–	100	–	10	–	10	–	1	–
	0-1,000	0-70	<b>G2514L</b>	<b>G2531R</b>	–	–	100	–	20	–	10	–	1	–
	0-2,000	0-140	<b>G2515L</b>	–	–	–	500	–	50	–	10	–	2	–
	0-3,000	0-200	<b>G2516L</b>	–	–	–	500	–	50	–	50	–	5	–
	0-6,000	0-400	<b>G2517L</b>	<b>G2534R</b>	–	–	1000	–	100	–	100	–	10	–
	0-10,000	0-700	<b>G2535L</b>	<b>G2537R</b>	<b>G4088L</b>	<b>G4039L</b>	2000	1000	200	100	100	100	10	10
0-15,000	0-1000	<b>G2536L</b>	<b>G2538R</b>	<b>G4089L</b>	<b>G4040L</b>	3000	3000	200	200	100	100	20	20	
<b>H-Series</b>	0-10,000	0-700	–	–	<b>H4049L</b>	<b>H4071L</b>	–	1000	–	100	–	100	–	10

▼ Gauge shown: T-6003L



## T Series

Pressure Range:  
**0-50,000 psi**

Face Diameter:  
**6.4 inches**

Accuracy, % of full scale:  
**± 1/2% and ± 1 1/2%**



### Cone Mount Gauge Adaptor

Contains fittings to connect .25" cone fitting gauge to .38" cone system.

Kit includes **43-301** tee and **43-704** gauge adaptor.

Order model number: **83-011**.

Page: 71



### Cone Mount Gauge Connector

For connecting gauges with .25" cone fitting directly to model number 11-100 or


11-400 pump. May be used with other .25" cone systems.

Order model number: **43-704**

Page: 71

- Calibrated for dual scale reading in psi and bar
- All gauges have spring-loaded backs with rubber blow-out plugs to protect case assembly in case of over-pressurization
- 40,000 and 50,000 psi models include flange mounting
- 1/2" NPTF versions are made of high strength alloy steel
- .25" cone models are made of 316 stainless steel, with 403 stainless steel on 40,000 and 50,000 psi models
- Integral maximum indicator pointer standard on all gauges

▼ An Enerpac P-2282 hand pump equipped with a T-6011L test system gauge is used for proof pressure testing of hydraulic valves.

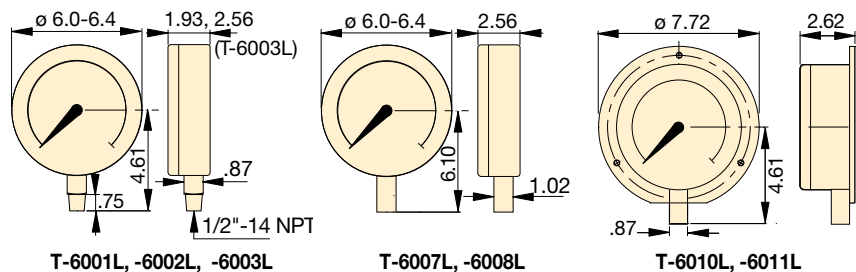

Pressure Range (psi)	Pressure Range (bar)	Model Number		Number Intervals (psi)	Graduation Intervals (psi)	Number Intervals (bar)	Graduation Intervals (bar)
		Alloy Steel 1/2" NPTF	Stainless Steel .25" Cone				
0-1,000*	0-70	<b>T-6001L</b>	-	100	10	10	1
0-5,000*	0-350	<b>T-6002L</b>	-	500	50	50	5
0-10,000*	0-700	<b>T-6003L</b>	<b>T-6007L</b>	1,000	100	100	10
0-20,000*	0-1400	-	<b>T-6008L</b>	1,000	100	200	20
0-40,000**	0-2800	-	<b>T-6010L</b>	5,000	200	500	20
0-50,000**	0-3500	-	<b>T-6011L</b>	5,000	500	500	50

\* Accuracy: ± 1/2%

\*\* Accuracy: ± 1 1/2%

# Digital, Hydraulic Pressure Gauges

▼ Gauge shown: **DGR-1**



## DGR Series

Pressure Range:

**0-15,000 psi**

Voltage:

**3 VDC (battery)**

Accuracy, % of full scale:

**± 0.2%**

- Rated for system pressure up to 15,000 psi
- Displays in psi, bar, MPa, kPa, mbar/hPa
- Zero reset – ensures that gauge reads actual system pressure
- Protective cover can be ordered separately
- 3 VDC battery included – CR2430
  - 1400 hours continuous operation in standard mode
  - IP65 protection
- Two modes
  - Automatic shut off (15 min.)
  - Continuous display



### Protective Cover

Fits over face of gauge for protection in harsh environments. Order Model No. **DGR-1PC**.




### Gauge Adaptor

For easy gauge installation into almost any system, Enerpac offers a complete line of gauge adaptors.

Page: **130**

▼ Greater accuracy and easier to read: enhance your ability to monitor and control hydraulic system pressure up to 15,000 psi.

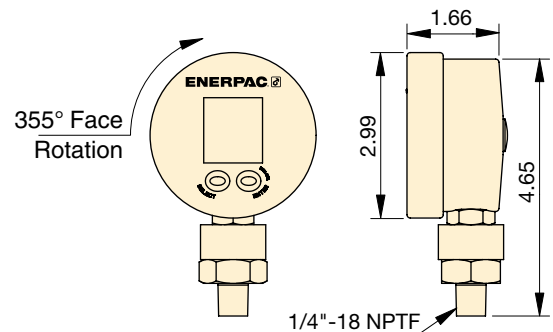

Pressure Rating (psi)		Model Number	Pressure Rating (bar)		Pressure Rating (kPa)		Pressure Rating (MPa)		Pressure Rating (mbar)		Weight (lbs)
Range	Interval		Range	Interval	Range	Interval	Range	Interval	Range	Interval	
0-15,000	3	<b>DGR-1</b>	0-1000	0.2	0-20,000	20	0-100	0.02	0-20,000	200	0.5

▼ Shown left to right: GA-3, V-91, GA-1, GA-2, GA-4, NV-251, GA-918



## GA, NV, V Series

Operating Pressure:  
**10,000 psi**


▼ A gauge is easily installed into your hydraulic system using a gauge adaptor.




### Gauge Adaptors (GA-Series)

- For easy mounting of a pressure gauge into your system
- Male end screws into pump or cylinder port, female end accepts hose or coupler, third port is for gauge connection
- GA-918 provides for swivel connection
- Simplifies gauge installation and reading

Model Number	Gauge Port (NPTF)	Male End (NPTF)	Female End (NPTF)	Dimensions (in)					
				A	B	C	D	E	F
GA-1	1/2"	3/8"	3/8"	2.81	1.24	1/2 NPTF	3/8 NPTF	3/8 NPTF	1.25
GA-2	1/2"	3/8"		6.10	1.38	1/2 NPTF	3/8 NPTF	3/8 NPTF	1.25
GA-3	1/4"	3/8"		5.25	1.38	1/4 NPTF	3/8 NPTF	3/8 NPTF	1.25
GA-4	1/2"	1/4"		4.38	1.38	1/2 NPTF	1/4 NPTF	3/8 NPTF	1.25



GA-1




GA-2, GA-3, GA-4



### Swivel Adaptor (GA-918)

- Simplifies gauge installation and reading


Model Number	Dimensions (in)						
	A	B	C	D	E	S	S1
GA-918	4.62	1.72	1/2 NPTF	1.30	1/2 NPTF	1.13	1.50




### Needle Valves (NV- and V-Series)

- Both NV-251 and V-91 provide positive shut-off
- 316 stainless steel stem, 24 threads/in.

Model Number	Orifice	Thread Size	Dimensions (in)						
			A	B	C	D	E	F	G
NV-251	.17	1/4" NPT	2.22	.75	.38	1.81	2.25	1.13	.72
V-91	.19	1/2" NPT	3.50	1.44	.63	1.25	2.50	1.25	-



NV-251



V-91

# Enerpac Accessories Application Ideas

By using only Enerpac Branded Oil and Couplers, you are protecting the integrity of your system with components that are designed to work with your Enerpac Rams, Cylinders, Pumps and Tools. Protect your investment and personnel, demand only Enerpac accessories.


## H-Series Hydraulic Hoses

Enerpac H-Series hydraulic hoses are designed to provide the best performance of your Enerpac products. Available in Thermoplastic or Rubber construction, a number of lengths and internal diameters, and with a number of end-configurations, there will be an Enerpac hose to perfectly match your exact application.



## C-Series Couplers

Enerpac C-Series Couplers provide easy hose and tool connectivity while providing correct performance and pressure ratings to operate most all Enerpac products.

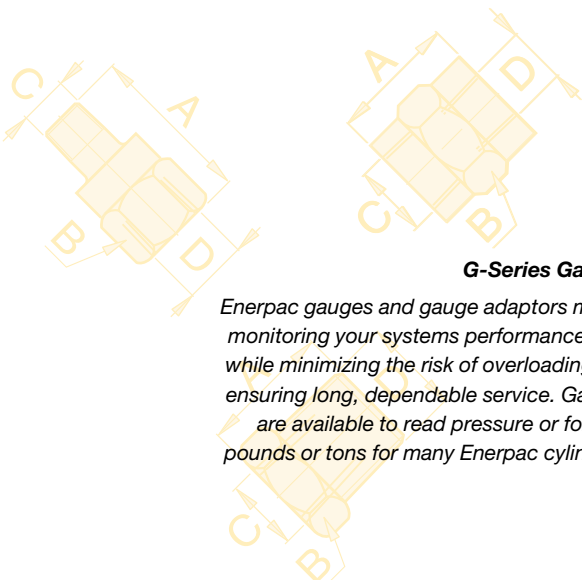

## G-Series Gauges

Enerpac gauges and gauge adaptors makes monitoring your systems performance easy while minimizing the risk of overloading and ensuring long, dependable service. Gauges are available to read pressure or force in pounds or tons for many Enerpac cylinders.




▼ Shown from left to right: V-152, V-66, V-82, V-161, V-42, V-17



## Your Hydraulic Control Solution

▼ The V-152 Pressure Relief Valve limits the pressure or force developed in the hydraulic system.

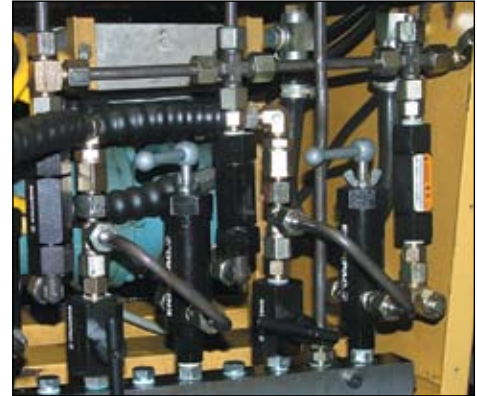


- All valves are rated for 10,000 psi operating pressure
- All valves feature NPTF porting to insure against leakage at rated pressure
- All valves are painted, coated, or plated for corrosion resistance



### Valve Applications

To see these valves used in typical hydraulic circuits, please see our "Yellow Pages".

Page: 252

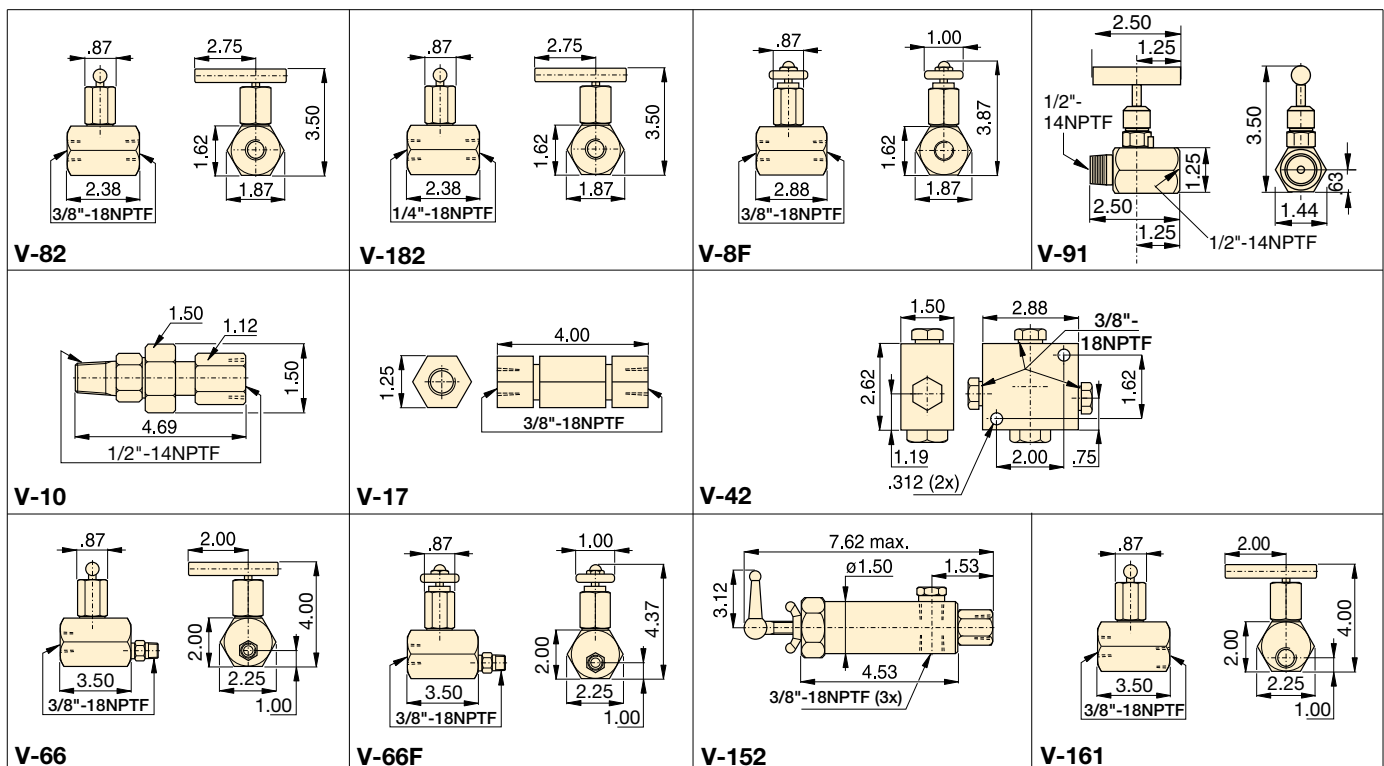

Valve Dimensions in inches.

# Flow and Pressure Control Valves



## Premounted Manifold

For two or four port manifold with integral flow control valves, see the manifold page of the System Components section.

Page: 122



## Fittings

















For additional fittings see the fitting page of the System Components section.

Page: 123

## V Series



Maximum Operating Pressure:  
**10,000 psi**

Valve Type and Model Number	Description	Hydraulic Symbol
<b>Needle Valve</b> <b>V-82</b> <b>V-182F</b> <b>V-8F</b>	 <p><b>V-82:</b> To control cylinder speed. Can also be used as shut-off valve for temporary load holding.  <b>V-182:</b> Same as V-82, but with <math>\frac{3}{8}</math>" NPTF female ports.  <b>V-8F:</b> Similar to V-82, but with very fine metering for precise flow control.  <b>Not recommended as shut-off valve.</b></p>	
<b>Snubber Valve</b> <b>V-91</b>	 <p><b>V-91:</b> Adjustable for metering oil out of a gauge to prevent snapping of gauge pointer when load or pressure is suddenly released. Also suitable as shut-off valve to protect</p>	
<b>Auto Damper® Valve</b> <b>V-10</b>	 <p><b>V-10:</b> To be used when gauge pressure must be monitored during high cycle applications. Creates a flow resistance when load is released suddenly.</p>	
<b>Check Valve</b> <b>V-17</b>	 <p><b>V-17:</b> Ruggedly built to resist shock and operate with low pressure drop. Closes smoothly without pounding.  <math>\frac{3}{8}</math>" NPTF female ports.</p>	
<b>Pilot Operated Check Valve</b> <b>V-42</b>	 <p><b>V-42:</b> Can be mounted at the cylinder to hold the load in case of system pressure loss. Normally used with double-acting cylinders where pilot port receives pressure</p>	
<b>Manually Operated Check Valve</b> <b>V-66*</b> <b>V-66F</b>	 <p><b>V-66:</b> Used for load holding applications with single and double acting cylinders. Valve is manually opened to allow oil to flow back to tank when cylinder retracts.  <b>V-66F:</b> Similar to V-66, but with very fine metering capability for precise flow control.                      Not designed for load holding applications.</p>	
<b>Pressure Relief Valve</b> <b>V-152*</b>	 <p><b>V-152:</b> Limits pressure developed by the pump in hydraulic circuit, thus limiting the force created by other components. Valve opens whenever preset pressure is reached.</p>	
<b>Sequence Valve</b> <b>V-161</b>	 <p><b>V-161:</b> To control oil flow to a secondary circuit. Flow is blocked until system pressure rises to the V-161 setting. When this pressure level is reached, the V-161 opens to</p>	

\* See page 56-57 for more information on extreme pressure and flow control valves.

# Enerpac Hydraulic Presses

**ENERPAC**   
POWERFUL SOLUTIONS. GLOBAL FORCE.

**E**NERPAC Hydraulic Presses are available in a wide variety of standard capacities and configurations, or you can “build your own” with the easy-to-use matrix.

The press frames are a welded construction for maximum strength and durability, and when combined with the power of high pressure hydraulics, will provide years of safe and dependable service in your workshop.

Enerpac press capacities range from 10-ton to 200-ton and are available in Bench, C-Frame, Arbor, H-Frame and Roll-Frame models.

**These Press features increase productivity and broaden the range of applications:**


Standard on many Enerpac IP Presses, the exclusive Hydra-Lift™ offers effortless adjustment to the press daylight by use of a hydraulic lift.



Easy horizontal cylinder position is achieved with the unique “roller-head” cylinder mounting block, standard on most Enerpac IP Presses.













Optional “V-blocks” for positioning of complex parts are designed with high-strength steel for long life.





# Press Section Overview

Capacity (tons)	Press Type and Functions	Series		Page
10-200	H-Frame Presses	IP		136 ▶
50-200	Roll Frame Presses	IPR		140 ▶
5-20	C-Clamp Presses	A		142 ▶
10-30	Arbor Presses	A		142 ▶
10	Bench Frame Press	A IP		142 ▶
5	Hydraulic Bench Vise	BV		144 ▶
10-200	Press Accessories Press Speed Chart			146 ▶
10-200	Custom Built Presses	IP		147 ▶
5 1-100	Tension Meter Load Cells	TM LH		148 ▶
	Press Application Ideas			149 ▶



▼ Press shown: IPE-5060



- Quality welded frame for maximum strength and long life
- Exclusive “Hydra-Lift™” bed for effortless adjustment of the vertical daylight (10-ton models are manual)
- Roller head design is standard to allow movement and locking of the cylinder from side to side (10-ton, 25-ton and 30-ton are manual)
- All models in the Quick Selection Chart have been matched to a pump, cylinder, hoses and gauge, offering the complete package



◀ An Enerpac H-Frame press quickly removes the shaft from this assembly.

## Setting the Industry Standard



### Cylinder Mounting Block

Allows cylinder mounting into a press frame, while also allowing side to side adjustment of cylinder position.

Page: 146



### Hydra-Lift™

Allows easy, effortless daylight adjustment. Standard on most H-Frame presses.

Page: 146



### Pump Mounting Bracket

Heavy-duty steel brackets allow mounting of one of the Enerpac Power Sources to power your press.

Page: 146



### Gauge Included

All standard press models include a gauge and gauge adaptor, matching the press capacity.

Page: 139



### V-Blocks

These optional V-Blocks are designed for easy fixturing of round stock and other non-uniform materials. Featuring precise fit into the press bolster.

Page: 146

# H-Frame Presses



## Ordering Variations

Any variations to a listed part number must be ordered as two separate items. For example, if you need a different voltage electric pump, please order from the modular matrix on page 147 and the electric pump from the modular matrix on page 91 (electric) or page 103 (air).

Any questions should be directed to our Technical Service Department.

Page: 146



## Cylinder Types



= Single-acting,  
Spring Return



= Double-acting,  
Hydraulic Return

## IP Series



Capacity:

**10-200 tons**

Maximum Daylight and Width:

**54.50 & 48.00 inches**

Maximum Operating Pressure:

**10,000 psi**

## ▼ QUICK SELECTION CHART

For more technical information see next page.

Press Capacity (tons)	Maximum Vertical Daylight (in)	Maximum Bed Width (in)	Power Source					Press Model Number	Cylinder			Speed (sec/in)*	
			Type			Valve			Stroke (in)	Rapid Advance	Pressing		
			Man.	Elec.	Air	Man.	Elec.						
10 [101]	1016	473		●		●		●		254	45	7,9	
	1016	473			●	●		●		254	7,5	1,9	
	1016	473	●			●		●		254	{7,8}	{1,7}	
	1016	473	●			●			●	254	{11}	{1,7}	
	1016	473			●	●			●	254	8,5	2,3	
25 [232]	1384	736		●		●		●		152	17	1,6	
	1384	736		●			●	●		355	36,9	3,3	
	1384	736			●	●		●		355	3,6	1,0	
	1384	736	●			●		●		355	{4,9}	{0,7}	
30 [294]	1384	736			●	●			●	355	42	0,6	
	1384	736		●			●		●	355	29,3	2,6	
	1384	736	●			●			●	355	{3,6}	{0,7}	
50 [498]	1233	730		●			●	●		330	24,9	2,3	
	1233	730			●	●		●		152	25	0,3	
	1233	730	●			●		●		152	{19}	{0,7}	
	1233	730	●			●		●		152	{2,3}	{0,3}	
	1233	730		●		●		●		152	7,7	0,8	
	1233	730			●	●			●	330	26	0,8	
	1233	730		●			●		●	330	24,9	2,3	
1233	730	●			●			●	330	{19}	{0,7}		
100 [933]	1079	889			●	●		●		254	14	0,4	
	1079	889		●			●	●		254	13,3	1,2	
	1079	889	●			●		●		254	{10}	{0,4}	
	1079	889		●			●		●	330	13,3	1,2	
	1079	889	●			●			●	152	{10}	{0,4}	
150 [1387]	1231	1219		●			●	●		330	11,7	1,7	
200 [1995]	1231	1219		●			●	●		330	8,1	1,1	

\* {-} Speed in strokes per inch plunger travel


The moveable  
“cylinder mounting  
block” allows the  
user to quickly  
adapt the press  
to a specific job. ▶



◀ For full features see page 136.

Press Capacity (tons)	Press Model Number	Pump Model Number	Page:	Cylinder Model Number	Page:	H-Frame Press Dimensions (in)					
						A (max)	A (min)	B	C	D	E
10 (101)	IPE-1215	PEM-1201B	76	RC-1010	6	1016	62	–	1187	127	473
	IPA-1220	PATG-1102N	98	RC-1010	6	1016	62	–	1187	127	473
	IPH-1240	P-392	62	RC-1010	6	1016	62	–	1187	127	473
	IPH-1234	P-84	64	RR-1010	32	1016	62	–	1187	127	473
	IPA-1244	PAMG-1402N	98	RR-1010	32	1016	62	–	1187	127	473
25 (232)	IPE-2505	PUJ-1200B	74	RC-256	6	1391	177	–	1447	301	736
	IPE-2510	ZE3310SB-N	88	RC-2514	6	1391	177	–	1447	301	736
	IPA-2520	PATG-1102N	98	RC-2514	6	1391	177	–	1447	301	736
	IPH-2531	P-80	64	RC-2514	6	1391	177	–	1447	301	736
30 (294)	IPA-3071	PAM-1042	101	RR-3014	32	1391	177	–	1447	301	736
	IPE-3060	ZE3410SB-N	89	RR-3014	32	1391	177	–	1447	301	736
	IPH-3080	P-84	64	RR-3014	32	1391	177	–	1447	301	736
50 (498)	IPE-5010	ZE4320SB-N	89	RC-5013	6	1213	179	476	1371	263	730
	IPA-5021	PAM-1022	101	RC-506	6	1213	179	476	1371	263	730
	IPH-5030	P-462	64	RC-506	6	1213	179	476	1371	263	730
	IPH-5031	P-80	64	RC-506	6	1213	179	476	1371	263	730
	IPE-5005	PUJ-1200B	74	RC-506	6	1213	179	476	1371	263	730
	IPA-5073	ZA4208MX	102	RR-5013	32	1213	179	476	1371	263	730
	IPE-5060	ZE4420SB-N	89	RR-5013	32	1213	179	476	1371	263	730
	IPH-5080	P-464	64	RR-5013	32	1213	179	476	1371	263	730
100 (933)	IPA-10023	ZA4208MX	102	RC-10010	6	1054	177	508	1295	263	889
	IPE-10010	ZE4320SB-N	89	RC-10010	6	1054	177	508	1295	296	889
	IPH-10030	P-462	64	RC-10010	6	1054	177	508	1295	296	889
	IPE-10060	ZE4420SB-N	89	RR-10013	32	1054	177	508	1295	296	889
	IPH-10080	P-464	64	RR-1006	32	1054	177	508	1295	296	889
150 (1387)	IPE-15065	ZE5420SG-N	89	RR-15013	32	1257	317	711	1384	254	1219
200 (1995)	IPE-20065	ZE5420SG-N	89	RR-20013	32	1219	317	711	1384	254	1219

# H-Frame Presses

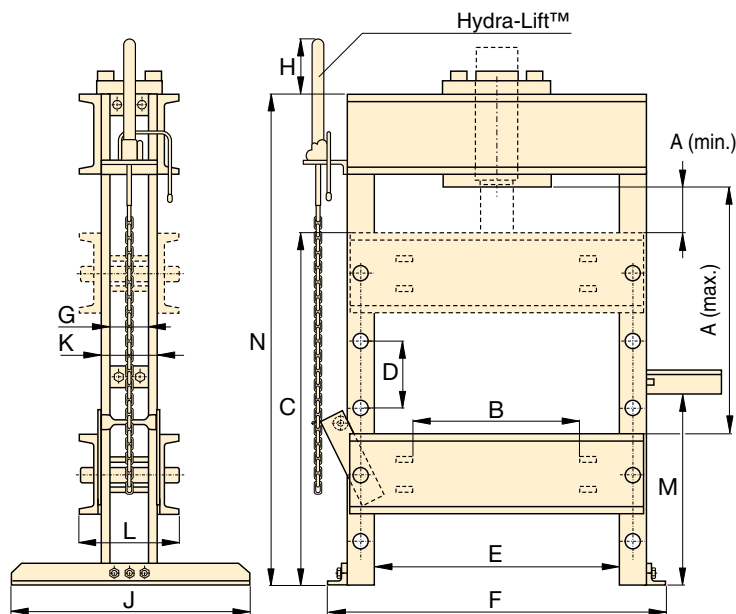

## IP Series



Capacity:  
**10-200 tons**

Maximum Daylight and Width:  
**54.50 & 48.00 inches**

Maximum Operating Pressure:  
**10,000 psi**

H-Frame Press Dimensions (in)									Weight (lbs)	Press Model Number
F	G	H	J	K	L	M	N			
632	-	-	755	108	189	889	1320	135	<b>IPE-1215</b>	
632	-	-	755	108	189	889	1320	72	<b>IPA-1220</b>	
632	-	-	755	108	189	889	1320	71	<b>IPH-1240</b>	
632	-	-	755	108	189	889	1320	85	<b>IPH-1234</b>	
632	-	-	755	108	189	889	1320	73	<b>IPA-1244</b>	
1028	101	336	762	133	271	673	1930	274	<b>IPE-2505</b>	
1028	101	336	762	133	271	673	1930	316	<b>IPE-2510</b>	
1028	101	336	762	133	271	673	1930	276	<b>IPA-2520</b>	
1028	101	336	762	133	271	673	1930	281	<b>IPH-2531</b>	
1028	101	336	762	133	271	673	1930	310	<b>IPA-3071</b>	
1028	101	336	762	133	271	673	1930	327	<b>IPE-3060</b>	
1028	101	336	762	133	271	673	1930	301	<b>IPH-3080</b>	
1085	127	222	914	184	365	781	1930	472	<b>IPE-5010</b>	
1085	127	222	914	184	365	781	1930	439	<b>IPA-5021</b>	
1085	127	222	914	184	365	781	1930	439	<b>IPH-5030</b>	
1085	127	222	914	184	365	781	1930	420	<b>IPH-5031</b>	
1085	127	222	914	184	365	781	1930	421	<b>IPE-5005</b>	
1085	127	222	914	184	365	781	1930	479	<b>IPA-5073</b>	
1085	127	222	914	184	365	781	1930	477	<b>IPE-5060</b>	
1085	127	222	914	184	365	781	1930	455	<b>IPH-5080</b>	
1295	171	222	914	222	438	841	1930	748	<b>IPA-10023</b>	
1295	171	222	914	222	438	841	1930	781	<b>IPE-10010</b>	
1295	171	222	914	222	438	841	1930	751	<b>IPH-10030</b>	
1295	171	222	914	222	438	841	1930	791	<b>IPE-10060</b>	
1295	171	222	914	222	438	841	1930	755	<b>IPH-10080</b>	
1706	231	78	1117	333	555	1212	2286	1772	<b>IPE-15065</b>	
1706	231	78	1117	333	555	1212	2286	1772	<b>IPE-20065</b>	



### H-Frame Press Gauges

All standard press models include a gauge and gauge adaptor, matching the press capacity:

Press Capacity (tons)	Gauge Model Number	Adaptor Model Number
10	<b>GF-10P</b>	<b>GA-2</b>
25	<b>GF-20P</b>	<b>GA-2</b>
30	<b>GF-835P</b>	<b>GA-3</b>
50	<b>GF-50P</b>	<b>GA-2</b>
100	<b>GF-871P</b>	<b>GA-3</b>
150	<b>GF-200P</b>	<b>GA-3</b>
200	<b>GF-200P</b>	<b>GA-3</b>

For more information on gauges, please refer to the System Components section.

Page: 117



### Ordering Variations

Any variations to a listed part number must be ordered as two separate items. For example, if you need a different voltage electric pump, please order from the modular matrix on page 147 and the electric pump from the modular matrix on page 91 (electric) or page 103 (air).

Any questions should be directed to our Technical Service Department.

Page: 146

▼ Shown: IPR-10075



- Quality welded frame for maximum strength and long life
- Frame rolls easily on four steel roller bearings
- Hydraulic clamp cylinders lock frame into position
- Exclusive “Hydra-Lift™” bolster for effortless adjustment of the vertical daylight
- Standard roller head design allows movement of the cylinder from side to side
- All models in the Quick Selection Chart have been matched to a pump, cylinder, hoses and gauge, offering the complete package
- Roll Frame design features a stationary bed with the ability to support heavy loads

## The One and Only



### Cylinder Mounting Block

Allows cylinder mounting into a press frame, while also allowing side to side adjustment of cylinder position.

Page: 148



### Pump Mounting Bracket

Heavy duty steel brackets to allow conversion to one of the Enerpac Power Sources to power your press.

Page: 148



### Hydra-Lift™

Allows easy, effortless daylight adjustment.

Page: 148



### Optional V-Blocks

These V-Blocks, 200 ton only, are designed for easy fixturing of round stock and other non-uniform materials. Featuring precise fit into the press bolster.

Page: 148

Press Capacity (tons)	Vertical Daylight A (in)		Horizontal Daylight E (in)	Pump Model Number	Press Model Number	Cylinder, Double-Acting Hydraulic Return				Speed (sec/in)	
	minimum	maximum				Stroke (in)	Model Number	Page:	Rapid Advance	Pressing	
50 (445)	152	942	730	ZE4420SB-N	89 IPR-5075	●	333	RR-5013	33	24,9	2,3
100 (890)	159	1048	889	ZE5420SG-N	89 IPR-10075	●	333	RR-10013	33	17,4	2,5
200 (1780)	279	1295	1219	ZE5420SG-N	89 IPR-20075	●	333	RR-20013	33	8,1	1,1

# Roll Frame Presses

▼ An IPR-20075 Roll Frame Press is used to remove a large shaft from this pillow-block assembly. The Roll Frame design allows this heavy part to be safely loaded with an overhead crane.



## IPR Series



Capacity:  
**50-200 tons**

Maximum Daylight and Width:  
**51.00 & 48.00 inches**

Maximum Operating Pressure:  
**10,000 psi**




### Roll Frame Press Gauges

All standard press models include a gauge and gauge adaptor, matching the press capacity:

Press Capacity (tons)	Gauge Model Number	Adaptor Model Number
50	GF-50P	GA-2
100	GF-871P	GA-3
200	GF-200P	GA-3

For more information on gauges, please refer to the System Components section.

Page: 117

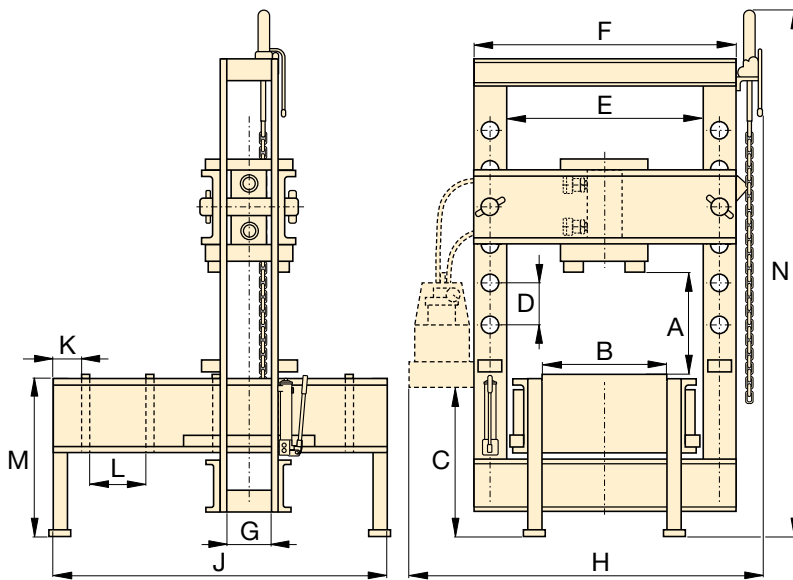

### Ordering Variations

Any variations to a listed part number must be ordered as two separate items. For example, if you need a different voltage electric pump, please order from the modular matrix on page 147 and the electric pump from the modular matrix on page 91 (electric) or page 103 (air).

Any questions should be directed to our Technical Service Department.

Page: 146

Roll Frame Press Dimensions (in)												Weight (lbs)	Press Model Number
B	C	D	F	G	H	J	K	L	M	N			
397	971	263	933	127	1420	1625	203	270	762	2869	889	IPR-5075	
437	965	222	1143	146	1605	1676	203	270	812	3021	1,746	IPR-10075	
609	933	254	1625	231	2149	2197	203	381	914	3199	3,569	IPR-20075	

▼ Shown from left to right: A-220, A-330 and A-258



## The Standard In Workshop Tools



### Push Pin A-183

For applications requiring precision pressing, such as shaft removal and insertion. This attachment fits 10 ton cylinders and requires the use of a threaded adaptor saddle (A-13).



### Smooth Saddle A-185

For pressing applications of delicate parts, such as aluminum castings, this saddle decreases surface marks during the pressing application. Requires 10 ton cylinder and threaded adaptor saddle (A-13).

### Arbor Press


- Foot mounting holes for horizontal or vertical positioning
- Machined work surfaces for easier fixturing
- Slotted back to simplify loading and unloading of longer parts

### C-Clamp Press

- 5, 10 and 20 ton capacity
- Operational in all positions

### Bench Frame Press

- Cylinder mounting adaptor allows lateral positioning along rails
- Mounting holes for easy mounting to fixed surface

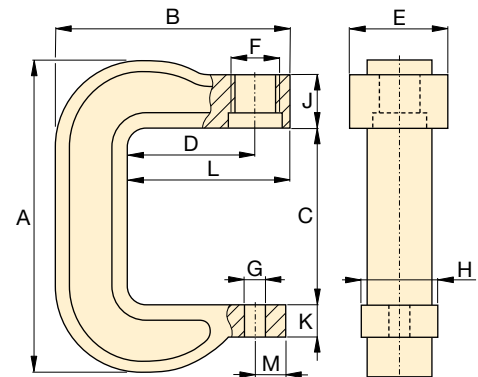

C-Clamp Press A-205, A-210, A-220



◀ A-310 Arbor Press used for compacting powder at 10 tons.

Press Type	Press Capacity (tons)	Maximum Vertical Daylight (in)	Maximum Bed Width (in)	Cylinder Series Number*	Press Model Number	Weight (lbs)
Arbor	10 (89)	228	134	RC-10-x	A-310	28
	30 (267)	260	177	RC-30-x	A-330	100
C-Clamp	5 (45)	165	50	RC-5-x	A-205	6
	10 (89)	228	57	RC-10-x	A-210	17
	20 (178)	304	69	**	A-220	38
Bench	10 (89)	419	381	-	A-258	47
	10 (89)	419	381	RC-1010	IPA-1022***	64
	10 (89)	419	381	RC-1010	IPH-1040***	61

\* Requires RC cylinder listed, see page 7 for specifications.

\*\* Requires RC-25 ton cylinder, limited to 20 tons.

\*\*\* Complete set includes cylinder and pump.



# Arbor, C-Clamp and Bench Frame Presses

▼ A perfect example of the force and versatility of the Enerpac A-220 C-Clamp press.



## A IP Series




Capacity:  
**5-30 ton**

Maximum Daylight and Width:  
**15.38 and 15.00 inches**

Mounting Capabilities:  
**Fixed or Portable**

Maximum Operating Pressure:  
**10,000 psi**

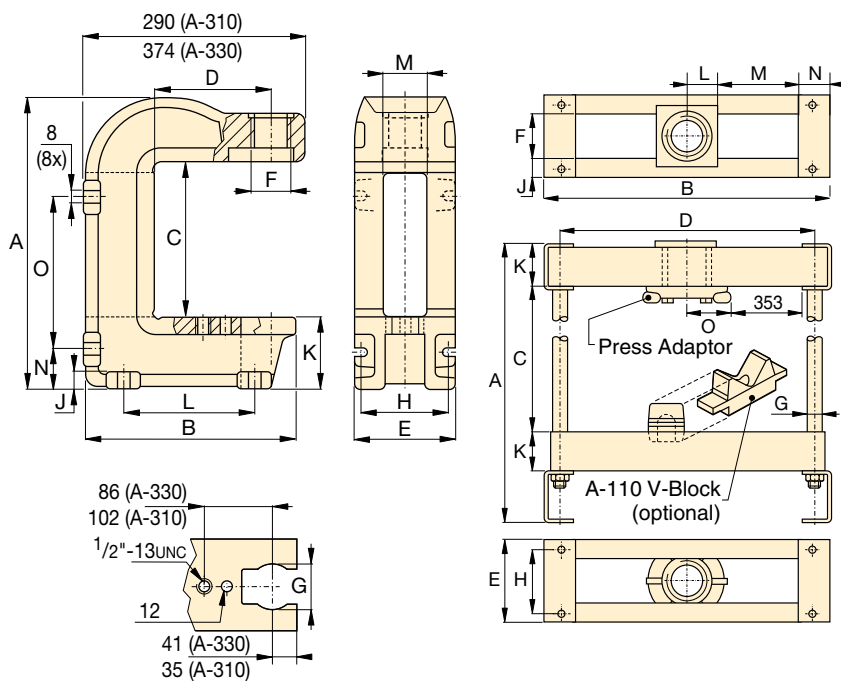

For high-cycle production applications, C-Clamp and Arbor presses should be limited in their capacity.

Consult Enerpac Technical Services for specific application details.



Enerpac cylinders and power sources for C-Clamp and Arbor presses must be ordered separately.

Arbor Press A-310, A-330

Bench Press Frame A-258

Press Dimensions (in)															Press Model Number
A	B	C	D	E	F	G	H	J	K	L	M	N	O		
414	280	227	152	134	2 1/4" -14 un	63	122	19	96	174	65	54	219	A-310	
557	352	260	152	177	3 5/16" -12 un	63	139	25	165	203	66	98	276	A-330	
290	203	165	95	73	1 1/2" -16 un	25	50	66	27	121	25	-	-	A-205	
406	282	228	152	82	2 1/4" -14 un	25	57	64	43	194	29	-	-	A-210	
539	346	304	152	108	3 5/16" -12 un	25	69	70	48	213	29	-	-	A-220	
651	476	419	406	146	82	25	114	31	69	35	135	56	67	A-258	
651	476	419	406	146	82	25	114	31	69	35	135	56	67	IPA-1022	
651	476	419	406	146	82	25	114	31	69	35	135	56	67	IPH-1040	

▼ Shown: **BV5 Hydraulic Bench Vise**



## Safe, controlled, hands-free clamping




### Hydraulic Bench Vise Sets

Order everything needed in one box to start working. The BV5 Hydraulic Bench Vise is available as a set (pump with gauge, tool, hose).

BV5 Set Model Number	Hydraulic Bench Vise Model	Pump Model Number	Coupler Model Number
STV5X	BV5*	XA11G	CR400

\* Includes hydraulic hose HC7210.



### Magnetic Jaw Liners

Don't forget to order **BV5VC** Magnetic Jaw Liners. The magnet inserts hold steel objects like sockets, screws and rings.

Order model number<sup>1)</sup> **BV5VC**



### Hydraulic Swivel Connector

An **XSC1** Hydraulic Swivel Connector allows optimal orientation of the Hydraulic Hose at the pump.

Order model number<sup>1)</sup> **XSC1**

<sup>1)</sup> Accessories must be ordered separately.

- 5-tons (44.5 kN) of force for forming and pressing applications
- 8-inch (203 mm) jaws hold large objects, making cumbersome tasks into one-person jobs
- Hands-free operation for safe and controlled actuation when paired with an Enerpac XA11G airpowered foot pump
- Flexible-use and ergonomically-friendly tool mounts as a press vertically or as a bench vise horizontally with a swivel base
- Rapid spring return makes repetitive work faster
- Accessory Magnetic Jaw Liners free hands by holding sockets, screws, rings, c-clips, springs, etc.
- Ships assembled with a heavy-duty 10-foot thermoplastic hydraulic hose, HC7210



*Enerpac BV5 Hydraulic Bench Vise mounted vertically for high-force pressing applications. ►*

◀ *Enerpac BV5 Hydraulic Bench Vise powered with an XA11G Foot Pump can change a traditional two-person job into a one-person operation.*



# Hydraulic Bench Vise



## Hydraulic Bench Vise

The Hydraulic Bench Vise is a general purpose tool that can have multiple clamping and holding applications. Its hydraulic cylinder applies force of up to 5 tons (44.5 kN), three-to-five times the force of a manually operated vise. Hydraulic pressure closes the vise, and spring-return opens the jaws. By pairing the Hydraulic Bench Vise with an Enerpac XA11G air-powered hydraulic power unit, the user can actuate the vise with the foot pedals while using both hands to perform work. In holding large objects, this can enable an otherwise cumbersome task to become a fast and easy one-person job. In addition, the XA11G provides the

control for the Hydraulic Bench Vise to hold even delicate objects without crushing. The integrated gauge of the XA11G provides clear indication of system status for better control of the tool. The Hydraulic Bench Vise can be installed horizontally on a flat surface, vertically as a press, or in any other orientation that satisfies the safety criteria stipulated by the operators' manual.

## BV5 Series



Maximum Force:

**5 tons**

Maximum Jaw Opening:


**8 inches**

Jaw Width:

**8 inches**

Maximum Operating Pressure:

**10,000 psi**

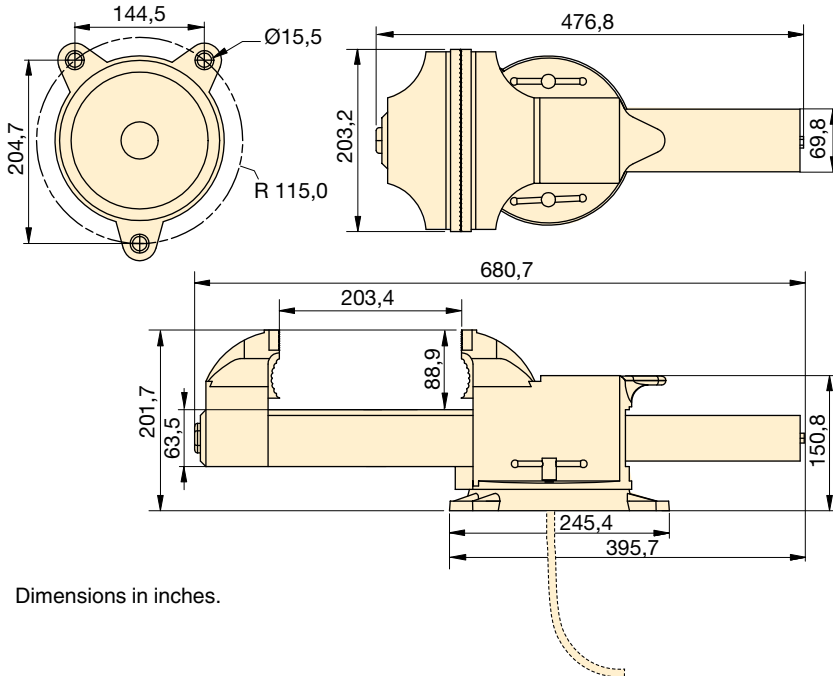

Dimensions in inches.





▼ Enerpac BV5 Hydraulic Bench Vise with hands-free XA11G Foot Pump for safe and controlled actuation.



## SELECTION CHART

Maximum Force (10,000 psi)	Model Number	Oil Capacity	Height	Jaw Width	Jaw Opening (Fully Open)	Length (Jaws Closed)	Length (Jaws Open)	Weight (Vise only)
(ton)		(in <sup>3</sup> )	(in)	(in)	(in)	(in)	(in)	(lbs)
44.5	<b>BV5</b>	131	202	203	203	477	680	25

# Press Accessories and Press Speed Chart

Description	Frame Capacity	Model Number		Features
Cylinder Mounting Block	10 ton Bench 10 ton H-Frame 25 and 30 ton H-Frame 50 ton H-Frame 100 ton H-Frame 200 ton H-Frame	AD-175 IPK-1012 IPK-3012 PK-501 PK-1002 PK-2002		<ul style="list-style-type: none"> <li>AD-175 converts the Bench press to use an RD-9 ton cylinder</li> <li>All mounting blocks allow horizontal movement of cylinder</li> </ul>
V- Blocks	10 ton Bench Press 10 ton H-Frame 25 and 30 ton H-Frame 50 ton H-Frame 100 ton H-Frame 150 & 200 ton H-Frame 200 ton Roll Frame	A-110 A-136 A-130 A-150 A-175 A-200 A-200R		<ul style="list-style-type: none"> <li>Machined from high strength steel for long life</li> <li>A-110 includes one V-block</li> <li>All other model numbers include two V-blocks</li> </ul>
Hydra-Lift™	25-100 ton H-Frame 150-200 ton H-Frame 50 and 100 ton Roll Frame 200 ton Roll Frame	IPL-100 IPL-200 IPLR-100 IPLR-200		<ul style="list-style-type: none"> <li>Allows easy, effortless daylight adjustments</li> <li>Includes accessory chain</li> </ul>
Pump Mounting Bracket	Hand operated and small Air Pumps; P-80, P-84, P-142, P-392, PA-133, Turbo II pumps  Electric, large Hand Pumps, and ZA4 Air Pumps; ZE Series, P-462, P-464, 10/90 Series Air Pumps	PMB-1  PMB-2		<ul style="list-style-type: none"> <li>Both mounting brackets are pre-drilled to accept a number of different pump models</li> </ul>

## Cylinder Speed

This chart will help you calculate the time required for an Enerpac cylinder to extend when powered by a 10,000 psi Enerpac hydraulic pump. The Cylinder Speed Chart can also be used to determine the pump type and model best suited for an application when you know the plunger speed required.

### Cylinder and Pump Selection Chart


Cylinder Capacity (tons)	Cylinder Load	Hand Operated Pumps				Electric Pumps					Air Pumps			
		Strokes per inch of plunger travel				Seconds per inch of plunger travel								
		Single Speed P-391	Two-Speed			½ HP Port.	½ HP Subm.	ZE3 Series	ZE4 Series	ZE5 Series	@100 psi air			
			P-392	P-80 P-84	P-462 P-464						Turbo II	PA-133	PAM 10 Series	ZA4
10 (89)	No load	1,7	7,8	11,3	87,5	38	28	85,1	122,9	160,7	12	7,6	123	161
	Load	1,7	1,7	1,7	3,3	3,8	3,8	7,6	11,3	22,7	1,5	1,5	1,7	5,7
25 (223)	No load	0,7	3,4	4,9	38,0	17	12	36,9	53,3	69,7	5,3	3,3	53	70
	Load	0,7	0,7	0,7	1,4	1,6	1,6	3,3	4,9	9,8	0,7	0,7	0,7	2,5
30 (267)	No load	0,6	2,7	3,9	30,1	13	2,1	29,3	42,3	55,3	4,2	2,6	42	55
	Load	0,6	0,6	0,6	1,1	1,3	1,3	2,6	3,9	7,8	0,5	0,5	0,6	2,0
50 (445)	No load	0,3	1,6	2,3	17,7	7,7	5,8	17,2	24,9	32,5	2,5	1,5	25	33
	Load	0,3	0,3	0,3	0,7	0,8	0,8	1,5	2,3	4,6	0,3	0,3	0,3	1,1
100 (890)	No load	0,2	0,8	1,2	9,5	4,1	3,1	9,2	13,3	17,4	1,3	0,8	13	17
	Load	0,2	0,2	0,2	0,4	0,4	0,4	0,8	1,2	2,5	0,2	0,2	0,2	0,6

Note: Values are approximate. Cylinder speed may vary in actual application.

## CUSTOM BUILD YOUR OWN PRESS

If the press that would best fit your application cannot be found in the charts, you can easily build your custom press here. All presses must be ordered with cylinders. The pump is ordered separately.

▼ This is how a press model number is built up

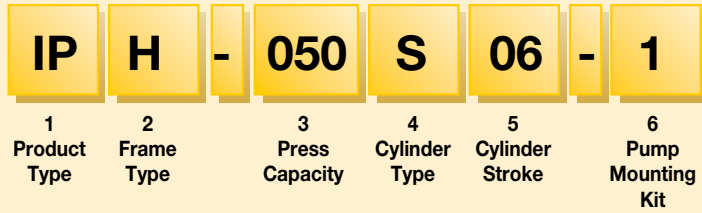

### 1 Product Type

**IP** = Industrial Press

### 2 Frame Type

**B** = Bench <sup>2)</sup>  
**H** = H-Frame  
**R** = Roll Frame <sup>1)</sup>

### 3 Press Capacity

**010** = 10 ton  
**025** = 25 ton  
**030** = 30 ton  
**050** = 50 ton  
**100** = 100 ton  
**150** = 150 ton  
**200** = 200 ton

### 4 Cylinder Type

**S** = Single-Acting (RC-Series)  
**D** = Double-Acting (RR-Series)

### 5 Cylinder Stroke (in)

- 10 ton S/A: **06, 08, 10, 12, 14**  
 10 ton D/A: **10, 12**  
 - 25 ton S/A: **06, 08, 10, 12, 14**  
 - 30 ton S/A: **08**  
 30 ton D/A: **08, 14**  
 - 50 ton S/A: **06, 13**  
 50 ton D/A: **06, 13, 20**  
 - 100 ton S/A: **06, 10**  
 100 ton D/A: **06, 13, 18**  
 - 150 ton D/A: **06, 13, 32**  
 - 200 ton D/A: **13, 18, 24**

### 6 Pump Mounting Kit <sup>3)</sup>

**0** = No mounting kit  
**1** = Hand operated and small air pumps:  
 P-80, P-84, P-141, P-142, P-202, P-391, P-392, PA-133  
 and all Turbo II Air pumps  
**2** = Electric, large hand operated and modular air pumps:  
 PUJ-12, PEM-12, ZE3-6 Series  
 P-462, P-464  
 PAM-10 and -90 Series

<sup>1)</sup> Roll Frame Press: 50-, 100- and 200-ton press capacity only. (Assembly required)

<sup>2)</sup> Bench Press: 10-ton press capacity S/A only. Convert A258 bench press to D/A using AD175 and RD910

<sup>3)</sup> Includes hoses for press, except for option **0**.

### Ordering Example

#### Model number: **IPH-050S06-2**

IPH-050S06-2 is a 50-ton H-Frame press with a single-acting, 6 inch stroke cylinder (RC-506). It has a pump mounting kit (for an electric Pump or a Modular Air Pump).

See the cylinder and pump selection chart on previous page for selecting the proper pump.

## IP Series



Capacity:

**10-200 tons**

Maximum Daylight and Width:

**54.50 & 48.00 inches**

Maximum Operating Pressure:

**10,000 psi**



“**No Load**” indicates the plunger speed as it extends toward the load (1st stage).

“**Load**” indicates the plunger speed as the load is applied at a system pressure of 10,000 psi (2nd stage).

#### Formula $V = A \div Q$

$V$  (sec/in) =  $A$  (in<sup>2</sup>) ÷  $Q$  (in<sup>3</sup>/min)

**V** = Cylinder plunger speed in seconds per inch

**A** = Cylinder effective area in square inches (in<sup>2</sup>)

**Q** = Pump oil flow in cubic inches (in<sup>3</sup>)

Cylinder Plunger Speed (sec/in)	=	Cylinder Effective Area (in <sup>2</sup> )	x	60 sec
		Pump Flow Rate (in <sup>3</sup> /min)		1

▼ Shown: LH-102 and TM-5 (in middle)



## TM, LH Series

Capacity:

**2,000 to 200,000 lbs.**

Accuracy, % of full scale:

**± 2%**



TM and LH models are 100% tested to verify accuracy within a ± 2% range.

If your application requires a calibrated tool, it must be submitted for certification testing.


Certification is NOT available from Enerpac.

### Tension Meter TM-5


- Accuracy, ± 2% of full scale
- Zinc and bronze plated to resist rust and corrosion
- Dual-range readout in kilograms and pounds
- Cushioned metal case provides safe storage and transport
- Maximum indicating pointer reading for pre-selected forces or to maintain maximum force readings

### Load Cells LH Series

- Accuracy, ± 2% of full scale
- Swivel loading pad reduces eccentric loading for improved accuracy
- Maximum indicating pointer reading for pre-selected forces or to maintain maximum force readings
- Dual-range readout in kilograms and pounds

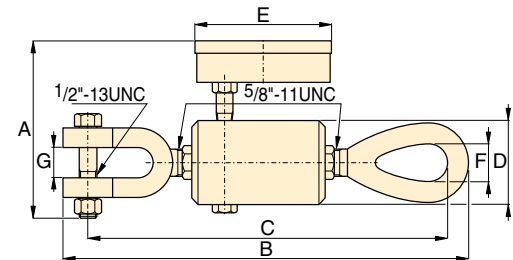

TM-5

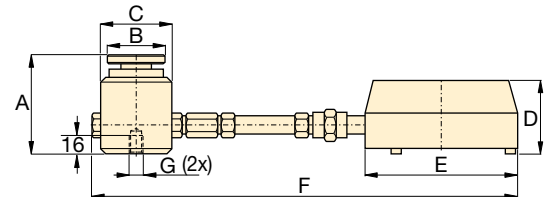

LH-Series

Type	Gauge Capacity		Model Number	Minimum Reading		Gauge Increments		Dimensions (in)						
	(lbs)	(kg)		(lbs)	(kg)	(lbs)	(kg)	A	B	C	D	E	F	G
Direct Mounted	4,500	10,000	TM-5	500	1000	100	100	120	247	236	50	93	22	19
Direct Load Cell Mounted	900	2,000	LH-10	100	200	20	20	77	44	57	60	101	254	1/4\"-20, 44,5 BC
	4,500	10,000	LH-50	500	1000	100	100	77	44	57	60	101	254	1/4\"-20, 44,5 BC
Remote Mounted with 2 ft. Hose	900	2,000	LH-102	100	200	20	20	77	44	57	60	147	846	1/4\"-20, 44,5 BC
	4,500	10,000	LH-502	500	1,000	100	100	77	44	57	60	147	840	1/4\"-20, 44,5 BC
	9,000	20,000	LH-1002	1,000	2,000	200	200	77	44	57	60	147	840	1/4\"-20, 44,5 BC
Remote Mounted with 6 ft. Hose	21,000	50,000	LH-2506	2,500	5,000	500	500	101	69	85	60	147	2094	3/8\"-24, 63 BC
	45,000	100,000	LH-5006	2,500	5,000	1,000	1,000	132	101	127	60	147	2135	3/8\"-24, 89 BC
	90,000	200,000	LH-10006	10,000	20,000	1,000	2,500	158	127	158	60	147	2166	3/8\"-24, 102 BC



**E**NERPAC hydraulics power many custom press applications. By providing reliable and safe high-pressure solutions, Enerpac can solve your custom press application.

### Fully Automated PLC-Controlled 1800 Ton High-Accuracy Press

The pressing and heating cycle, during the production of magnetic acceleration coils, required high force and high-accuracy to ensure absolute quality.

Enerpac was consulted to assist in the design of a high accuracy production press. Control of the press force is monitored along with the temperature of the coils during forming by a PLC Control System.



### 600 Ton High-Accuracy Collar Press

For production of accelerator coils, sheet metal needs to be formed into a specific shape and size. The end product of this forming is a cylindrical collar, which has a very solid structure, specific shape, and a tight tolerance for circularity and concentricity.

The Enerpac team was consulted to accomplish this task using proven high-pressure technology. The 600-ton press consisted of two separate hydraulic systems. The first system featured eight 25-ton cylinders, to position the sheets, while the second system featured eight 75-ton cylinders, to press the sheets into the correct shape.

The results were a hydraulic press system that increased productivity and lowered operating costs.

### 1000 Ton Cold Forming Press

A manufacturer of diesel engines needed to work-harden aluminum for crankshaft bearing inserts. Working with a customer-hired Systems Integrator, Enerpac provided a 1000-ton cylinder and hydraulic power supply, to the specifications required by the Integrator, to fit into his custom frame and operate with his control system. The Enerpac solution included a 50-series electric pump and 4-way electric solenoid valve.

The final products allowed the end user to quickly, accurately, and safely manufacture crankshaft bearings with an efficient production cycle.



**E**NERPAC offers a complete line of pullers with the widest range of sizes, capacities and styles. Whether your application requires mechanical, hydraulic or the patented Posi Lock® system, Enerpac can satisfy your requirements. Made of high strength steel alloys, you can depend on Enerpac pullers to provide years of trouble-free operation, even in the harshest environments.



### Hydraulic Pullers

These hydraulic pullers eliminate time-consuming and unsafe hammering, heating or prying. Damage to parts is minimized through the use of controlled hydraulic power.



### Posi Lock® Pullers

The puller that meets the safety challenge. A control cage holds the pulling jaws securely in working position. This patented feature reduces the possibility of the puller jaws slipping off the work surface thereby increasing

productivity and tool life while reducing dangerous situations for the user. The Posi Lock® feature is available in mechanical or hydraulic versions.



**WARNING**  
Do not exceed 50% of the rated puller capacity when using a double crosshead (2 griparms) or when using puller legs in combination with bearing puller attachment.



**CAUTION!**  
Not all puller components and configurations are rated at the set capacity. Please contact Enerpac for specific details.



Always wear Safety Goggles and Gloves while using pullers.



# Puller Section Overview

When selecting a puller it is important to consider three basic specifications:

### 1. Capacity:

The amount of force the puller is capable of producing.

Typically, the capacity required for a job can be determined by using the shaft diameter of the part being pulled.

For manual pullers, the center bolt diameter of the puller should be at least half the diameter of the shaft being pulled from.

For hydraulic pullers, the capacity in tons should be 7 to 10 times the shaft diameter. Use the following chart:

















Shaft Diameter	Puller Capacity
0" to 1"	10 ton
1" to 2"	20 ton
2" to 3.5"	30 ton
3.5" to 5.5"	50 ton

### 2. Reach:

The distance between the bottom of the base and the jaw flats. The puller's reach must equal or exceed the same distance of the part being pulled.

### 3. Spread:

The distance between the jaws. The puller's spread needs to be greater than the width of the part being pulled.

Puller Function	Capacity (tons)	Puller Type	Series		Page
	8-50	<b>Master Puller Sets</b> Max. Reach: 27.56 in. Max. Spread: 43.30 in.	<b>BHP</b>		152 ▶
	8-50	<b>Grip Puller Sets</b> Max. Reach: 27.56 in. Max. Spread: 43.30 in.	<b>BHP</b>		153 ▶
	8-50	<b>Cross-Bearing Puller Sets</b> Max. Reach: 34.00 in. Max. Spread: 22.46 in.	<b>BHP</b>		154 ▶
	8-50	<b>Bearing Cup Pullers</b> Max. Reach: 5.71 in. Max. Spread: 14.17 in.	<b>BHP</b>		155 ▶
	8-50	<b>Bearing Pullers</b> Max. Spread: 9.65 in. Max. Width: 11.50 in.	<b>BHP</b>		155 ▶
	2-40	<b>Posi Lock® Mechanical Pullers</b> Max. Reach: 14.00 in. Max. Spread: 25.00 in.	<b>EP, EPP, EPPMI, EPX</b>		156 ▶
	10-50	<b>Posi Lock® Hydraulic Pullers</b> Max. Reach: 14.00 in. Max. Spread: 25.00 in.	<b>EPH, EPHR, EPHS</b>		160 ▶
	100	<b>Posi Lock® Hydraulic Pullers</b> Max. Reach: 48.0 in. Max. Spread: 70.0 in.	<b>EPH EPHT</b>		163 ▶

▼ Shown: Master Puller Set BHP-3751G



## BHP Series

Capacity:

**8, 20, 30 and 50 tons**



**CAUTION!**

Not all puller components and configurations are rated at the set capacity. Please contact Enerpac for specific details.



Visit the **Products** section of our web site for more information and product selection charts regarding puller sets and individual puller component parts. [www.enerpac.com](http://www.enerpac.com)

- Supplied with a full hydraulic set including pump, hose, cylinder, gauge and gauge adaptor in a storage case
- High quality, forged steel components provide superior reliability and service
- Sets include speed crank and adjusting screw for fast contact to work before hydraulics are applied
- All Master Puller Sets include a Grip Puller, a Cross Bearing Puller, a Bearing Cup Puller and a Bearing Puller which can be ordered separately. See items 10, 20, 30 and 40

▼ Maintenance engineers throughout the industry greatly appreciate Enerpac Master Puller sets.



▼ SELECTION CHART

Master Puller Set Capacity	8 ton	20 ton	30 ton	50 ton	Page Number
Model Number ►	<b>BHP-1752*</b>	<b>BHP-2751G</b>	<b>BHP-3751G</b>	<b>BHP-5751G</b>	
Included Hydraulics: set weight ►	82 lbs	198 lbs	380 lbs	657 lbs	
Hand Pump	P-142	P-392	P-392	P-80	<b>62</b> ►
Cylinder	RWH-121	RCH-202	RCH-302	RCH-603	<b>26</b> ►
Saddle	–	HP-2015	HP-3015	HP-5016	<b>27</b> ►
Hose	HB-7206QB	HC-7206	HC-7206	HC-7206	<b>119</b> ►
Gauge	GF-120P	GF-813P	GF-813P	GF-813P	<b>125</b> ►
Gauge Adaptor	GA-4	GA-3	GA-3	GA-3	<b>130</b> ►
<b>Included Pullers:</b>					
<b>10</b> Grip Puller	BHP-1762	BHP-252	BHP-352	BHP-552	<b>153</b> ►
<b>20</b> Cross Bearing Puller	BHP-1772	BHP-262	BHP-362	BHP-562	<b>154</b> ►
<b>30</b> Bearing Cup Puller	BHP-180	BHP-280	BHP-380	BHP-580	<b>155</b> ►
<b>40</b> Bearing Puller	BHP-181	BHP-282	BHP-382	BHP-582	<b>155</b> ►
Storage Case	CM-6	CW-166	CW-550	CW-750	

\* Includes FZ-1630 Adaptor.

# Grip Puller Sets

▼ Shown: Grip Puller Set BHP-351G



- Precise hydraulic control allows fast, efficient and safe pulling
- High quality, forged steel components provide superior reliability and service
- Available with and without full hydraulic set
- Wooden case supplied standard

## BHP Series

Capacity:

**8, 20, 30 and 50 tons**

Maximum Reach:

**9.92-27.56 inches**

Maximum Spread:

**9.84-43.30 inches**

Maximum Operating Pressure:

**10,000 psi**



### CAUTION!

Not all puller components and configurations are rated at the set capacity. Please contact Enerpac for specific details.

### Ordering Example

#### Model Number BHP-251G:

Includes Grip Puller BHP-252 and a full hydraulic set. (Hand pump, cylinder, saddle, hose, gauge and gauge adaptor.)

#### Model Number BHP-252:

Includes Grip Puller mechanical parts **only**, for use with your existing hydraulics.

### ▼ SELECTION CHART

Grip Puller Set Capacity		8 ton	20 ton	30 ton	50 ton
Model Number	Included ▶	<b>BHP-152***</b>	<b>BHP-251G</b>	<b>BHP-351G</b>	<b>BHP-551G</b>
<b>Hydraulics:</b>	<b>set weight ▶</b>	48 lbs	123 lbs	200 lbs	353 lbs
Hand Pump		P-142	P-392	P-392	P-80
Cylinder		RWH-121	RCH-202	RCH-302	RCH-603
Saddle		-	HP-2015	HP-3015	HP-5016
Hose		HB-7206QB	HC-7206	HC-7206	HC-7206
Gauge		GF-120P	GF-813P	GF-813P	GF-813P
Gauge Adaptor		GA-4	GA-3	GA-3	GA-3
<b>10 Grip Puller</b>	<b>Model Number ▶</b>	<b>BHP-1762*</b>	<b>BHP-252*</b>	<b>BHP-352*</b>	<b>BHP-552*</b>
Maximum Spread**	2-jaw	9.84	15.75	23.38	35.43
	3-jaw	9.84	19.68	31.50	43.30
Maximum Reach**	2-jaw	9.92	11.81	15.25	27.56
	3-jaw	9.92	11.81	15.25	27.56
Jaw**	Thickness	.59	.79	.98	1.18
	Width	.94	1.10	1.50	1.57
Adjusting Screw**	Thread	¾"-16 UNF	1"-8 UNC	1¼"-7 UNC	1½"-5.5 NS
	Length	15.75	20.00	24.00	30.00
Wooden Case		CW-166	CW-166	CW-350	CW-750

\* Grip Puller model number without hydraulics.

\*\* Dimensions in inches.

\*\*\* Includes FZ-1630 Adaptor.

# Cross Bearing Puller Sets

▼ Shown: Cross Bearing Puller Set BHP-361G



- Precise hydraulic control allows fast, efficient and safe pulling
- High quality, forged steel components provide superior reliability and service
- The Cross Bearing Puller without hydraulics, Bearing Cup Puller and Bearing Puller may be ordered separately. See items 20, 30 and 40.

## ▼ SELECTION CHART

Cross Bearing Puller Set Capacity		8 ton	20 ton	30 ton	50 ton
	Model Number ►	<b>BHP-162**</b>	<b>BHP-261G</b>	<b>BHP-361G</b>	<b>BHP-561G</b>
<b>Included Hydraulics:</b>	set weight ►	57 lbs	137 lbs	267 lbs	408 lbs
Hand Pump		P-142	P-392	P-392	P-80
Cylinder		RWH-121	RCH-202	RCH-302	RCH-603
Saddle		–	HP-2015	HP-3015	HP-5016
Hose		HB-7206QB	HC-7206	HC-7206	HC-7206
Gauge		GF-120P	GF-813P	GF-813P	GF-813P
Gauge Adaptor		GA-4	GA-3	GA-3	GA-3
<b>20 Cross Bearing Puller</b>	Model Number ►	<b>BHP-1772</b>	<b>BHP-262</b>	<b>BHP-362</b>	<b>BHP-562</b>
Spread*	Maximum	10.5	13.83	17.9	22.46
	Minimum	4.2	5.5	7.08	8.66
Reach*	Maximum	14.0	22.5	28	34
	Adjusting Screw*	Diameter	¾"-16 UNF	1"-8 UNC	1¼"-7 UNC
Leg*	Length	15.75	20	24	30
		4.13	9.43	8	24
	Length	14.2	16.52	18	34
		–	22.5	28	–
Upper Leg Ends*	Thread	¾"-16x1.0	¾"-16x1.0	1"-14x1.38	1¼"-12x1.50
		–	4.5	–	–
Lower Leg Ends*	Thread	5/8"-18x1.0	5/8"-18x1.0	1"-14x1.06	1¼"-12x1.50
<b>30 Bearing Cup Puller</b>	Model Number ►	<b>BHP-180</b>	<b>BHP-280</b>	<b>BHP-380</b>	<b>BHP-580</b>
<b>40 Bearing Puller</b>	Model Number ►	<b>BHP-181</b>	<b>BHP-282</b>	<b>BHP-382</b>	<b>BHP-582</b>
Wooden Case	Model Number ►	<b>CW-166</b>	<b>CW-166</b>	<b>CW-550</b>	<b>CW-750</b>

\* Dimensions in inches.

\*\* Includes FZ-1630 Adaptor.

## BHP Series

Capacity:

**8, 20, 30 and 50 tons**

Maximum Reach:

**14.0-34.00 inches**

Maximum Spread:

**10.50-22.46 inches**

Maximum Operating Pressure:

**10,000 psi**



### CAUTION!

Not all puller components and configurations are rated at the set capacity. Please contact Enerpac for specific details.



Visit the **Products** section of our web site for more information and product selection charts regarding puller sets and individual puller component parts. [www.enerpac.com](http://www.enerpac.com)

# Bearing Cup and Bearing Pullers

▼ Shown: **BHP-380**



## Bearing Cup Puller

- Made of high strength steel alloy
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts
- Adjustable to fit a variety of bearings and seals

## BHP Series

Puller Set Capacity:

**8, 20, 30 and 50 tons**

Maximum Reach:

**4.33-5.71 inches**

Maximum Spread:

**4.33-14.17 inches**

Maximum Operating Pressure:

**10,000 psi**

### ▼ SELECTION CHART

Puller Set Capacity**		8 ton	20 ton	30 ton	50 ton
<b>30</b>	<b>Bearing Cup Puller</b>				
	Model Number ▶	<b>BHP-180</b>	<b>BHP-280</b>	<b>BHP-380</b>	<b>BHP-580</b>
Spread*	Max.	4.33	8.66	14.17	14.17
	Min.	1.06	.98	1.97	1.97
Reach*	Max.	4.33	5.51	5.71	5.71
	Center Screw Thread	3/4"-16 UNF	1"-8 UNC	1 1/4"-7 UNC	1 5/8"-5.50 NS

\* Dimensions in inches.

\*\* Puller capacity, not attachment capacity. See Warning box!



### WARNING!


Do not exceed 50% of the rated puller capacity when using a double crosshead (2 griparms) or when using puller legs in combination with bearing puller attachment.

▼ Shown: **BHP-382**



## Bearing Puller

- Made of high strength steel alloy
- Wedge-shaped edges allow removal of the most hard-to-grip components
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts

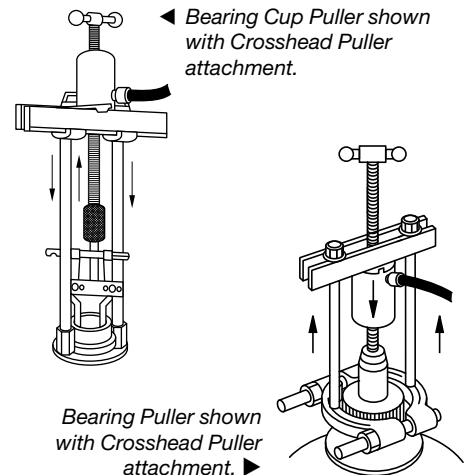

### ▼ SELECTION CHART

Puller Set Capacity**		8 ton	20 ton	30 ton	50 ton
<b>40</b>	<b>Bearing Puller</b>				
	Model Number ▶	<b>BHP-181</b>	<b>BHP-282</b>	<b>BHP-382</b>	<b>BHP-582</b>
Spread*	Max.	4.09	5.12	9.65	9.65
	Min.	.98	.39	.67	.67
Width*		4.96	5.91	11.50	11.50
Thread		5/8"-18 UNF	5/8"-18 UNF	1"-14 UNS	1 1/4"-12 UNF

\* Dimensions in inches.

\*\* Puller capacity, not attachment capacity. See Warning!



### Bearing Puller

Bearing Puller has wedge shaped edges for placing puller behind hard to reach bearings, gears, etc., where clearance prevents direct application of grip puller arms.

The Bearing Puller can be used with the Cross Bearing Puller or the Grip Puller.

▼ Shown from left to right: EP-206, EP-108



- Patented “Safety Cage” jaw retention system
- Roll threaded shafts for less effort when applying high torque
- Slim tapered jaws for improved gripping in tight spots
- Available in 2 and 3 jaw design and inside and outside pulling configuration
- More efficient pulling, as one man can do the job where manual pullers often require two operators



◀ Positioning an EP-104, 3-jaw puller on the accessory drive of a diesel engine.

## For Safer and Faster Pulling



### Long Jaws

Long Jaws are used to increase the reach and spread of manual pullers. They maintain the same pulling capacity as the standard jaws, but reduce clamping force to 25%.


Page: 159



### Shaft Attachments

Shaft protectors and extenders are live centers that fit over the standard puller shaft for tip protection and additional reach.

Page: 159



### Application Tip


In determining the correct manual puller capacity for your application, use the following rule:

The center bolt diameter of the puller should be at least 1/2 the diameter of the shaft being pulled on.

### Example:

A part being pulled from a shaft with a diameter of 1.5" would require a puller with a center bolt diameter of at least .75".

# Posi Lock® Mechanical Grip Pullers

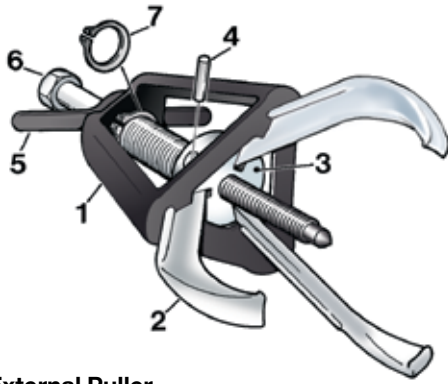

**External Puller**

- 1 Patented "Safety Cage" guides jaws, holding them securely onto the part.
- 2 Durable forged jaws provide positive grip.
- 3 Jaw head provides pivot and reaction point for jaws.
- 4 Pin, for easy jaw removal and replacement.
- 5 T-handle provides control of the puller jaws.
- 6 Drive bolt with rolled threads for increased force with reduced input torque.
- 7 Snap-ring retains cage to drive bolt and provides quick removal for easy service.

## EP EPPMI Series



Capacity:  
**2-40 tons**

Maximum Reach:  
**4.00-14.00 inches**

Maximum Spread:  
**0.50-25.00 inches**

### ▼ QUICK SELECTION CHART EXTERNAL PULLERS

For full technical information see next page.

Number of Jaws	Maximum Reach (in)	Spread Range (in)	Capacity (tons)	Model Number	Center Bolt Diameter (in)	Weight (lbs)
2	4.00	.5-5	2	EP-204	.56	3
3	4.00	.5-5	5	EP-104	.56	4
2	6.00	.5-7.0	6	EP-206	.66	7
3	6.00	.5-7.0	10	EP-106	.66	8
2	8.00	.75-12	12	EP-208	.79	12
3	8.00	.75-12	17	EP-108	.79	14
2	9.67	1.0-15	14	EP-210	.79	13
3	9.67	1.0-15	20	EP-110	.79	16
2	12.00	2.5-18	25	EP-213	1.17	38
3	12.00	2.5-18	30	EP-113	1.17	44
2	14.00	3.0-25	35	EP-216	1.23	57
3	14.00	3.0-25	40	EP-116	1.23	68




**Always wear Safety Goggles and Gloves while using pullers.**



#### Application Tip

Because of the unique Safety Cage design, Posi Lock® pullers will grip on surfaces where normal pullers would slip off; e.g. tapered bearings.

**Internal Puller**

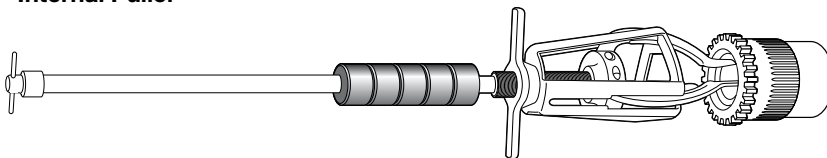

### ▼ QUICK SELECTION CHART INTERNAL PULLERS

For full technical information see next page.


Number of Jaws	Maximum Reach (in)	Spread Range (in)	Jaw Style	Model Number	Jaw Length (in)	Weight (lbs)
3	5.87	.56-4.00	Standard	EPPMI-6	6.62	8.6
	7.70	1.0-5.25	Long		8.62	8.6




Visit the **Products** section of our web site for more information and product selection charts regarding puller sets and individual puller component parts. [www.enerpac.com](http://www.enerpac.com)




Visit the **Products** section of our web site for selection information regarding internal and external puller component parts. [www.enerpac.com](http://www.enerpac.com)

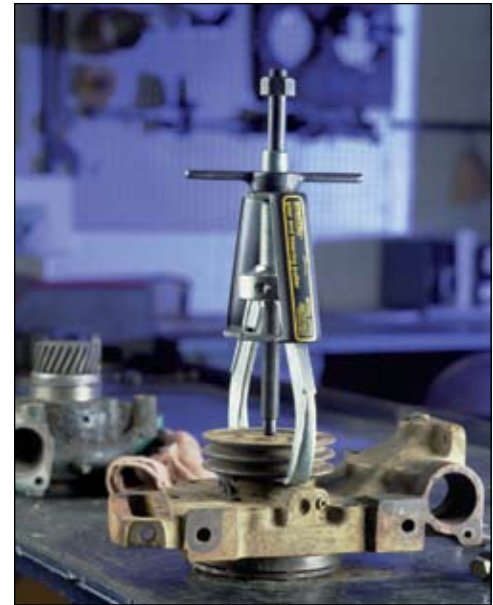

▲ EP-204 2-jaw puller positioned to pull a water pump drive pulley.

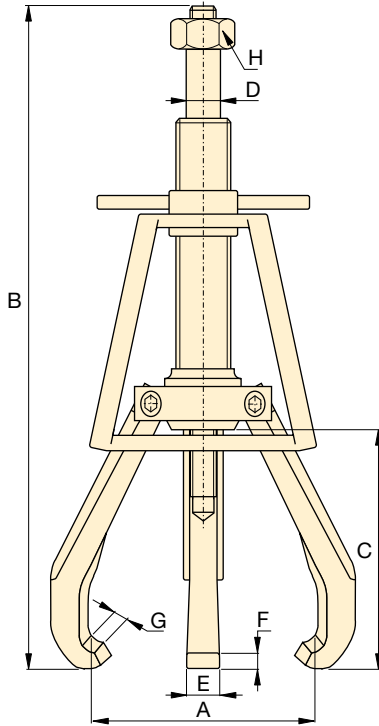

**2- and 3-Jaw External Puller EP-Series**

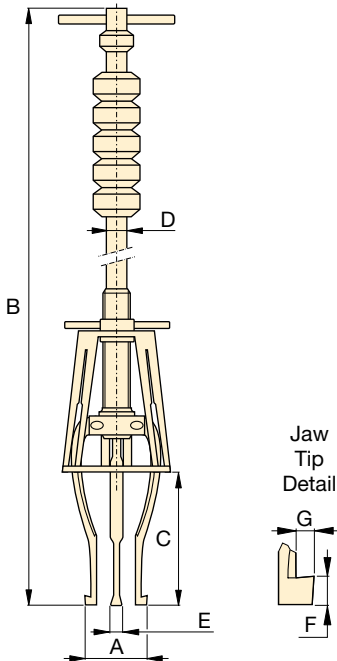

**Internal Puller EPPMI-Series**

### ▼ SELECTION CHART EXTERNAL PULLERS

Number of Jaws	Maximum Reach	Spread Range	Capacity	Model Number	Center Bolt Diameter	Maximum Torque
	C (in)	A (in)	(tons)		D (in)	(ft.lb)
2	4.00	.5-5.0	2	EP-204	.56	20
3	4.00	.5-5.0	5	EP-104	.56	40
2	6.00	.5-7.0	6	EP-206	.66	75
3	6.00	.5-7.0	10	EP-106	.66	130
2	8.00	.75-12.0	12	EP-208	.79	150
3	8.00	.75-12.0	17	EP-108	.79	220
2	9.67	1.0-15.0	14	EP-210	.79	175
3	9.67	1.0-15.0	20	EP-110	.79	275
2	12.00	2.5-18.0	25	EP-213	1.17	475
3	12.00	2.5-18.0	30	EP-113	1.17	600
2	14.00	3.0-25.0	35	EP-216	1.23	800
3	14.00	3.0-25.0	40	EP-116	1.23	850

### ▼ SELECTION CHART INTERNAL PULLERS

Number of Jaws	Maximum Reach	Spread Range	Jaw Style	Model Number	Jaw Length	Slide-hammer Weight
	C (in)	A (in)			(in)	(lbs)
3	5.87	.56-4.00	Standard	EPPMI-6	6.62	2.5
	7.70	1.00-5.25	Long		8.62	2.5



# Posi Lock® Mechanical Grip Pullers



## Shaft Protectors and Extenders

Shaft Protectors and Extenders are live centers that fit over the puller end for tip protection and added reach.



## Long Jaws

Long jaws are used for added reach and spread. They have the same capacity as standard jaws, but reduce the clamping force to 25%.

## EP EPPMI Series



Capacity:

**2-40 tons**

Maximum Reach:

**4.00-14.00 inches**

Maximum Spread:

**0.50-25.00 inches**




Length (in)	Diameter (in)	Increases Center Bolt Length (in)	Order: Model Number
1.00	0.75	0.38	<b>EPP-4</b>
1.97	0.75	1.50	<b>EPX-4</b>
1.22	0.87	0.50	<b>EPP-6</b>
1.97	0.87	1.50	<b>EPX-6</b>
1.22	1.00	0.50	<b>EPP-10</b>
1.97	1.00	1.50	<b>EPX-10</b>
2.00	1.38	0.83	<b>EPP-1316</b>

Spread (in)	Reach (in)	Order: Model Number
1.5-15	9.67	<b>EP-11054</b>
1.5-22	15.78	<b>EP-11054L</b>
1.5-30	20	<b>EP-11354L</b>
1.0-5.26	8.62	<b>EP-10554L*</b>

Note: See the chart below to reference matching pullers for these accessories.

\* EPPMI-6 only

## ▼ Optional Accessories

Dimensions						Model Number	  		
Overall Length	Jaw Width	Tip Clearance	Tip Depth	Hex Socket Size	EPPMI-6		Shaft Protectors	Extenders	Long Jaws
B (in)	E (in)	F (in)	G (in)	H (in)					
9.68-12.75	.54	.16	.18	3/4"	<b>EP-204</b>	<b>EPP-4</b>	<b>EPX-4</b>	-	
9.68-12.75	.54	.16	.18	3/4"	<b>EP-104</b>	<b>EPP-4</b>	<b>EPX-4</b>	-	
12.75-18.75	.75	.32	.24	3/4"	<b>EP-206</b>	<b>EPP-6</b>	<b>EPX-6</b>	-	
12.75-18.75	.75	.32	.24	3/4"	<b>EP-106</b>	<b>EPP-6</b>	<b>EPX-6</b>	-	
16.25-24.25	.77	.25	.36	1"	<b>EP-208</b>	<b>EPP-10</b>	<b>EPX-10</b>	<b>EP-11054</b>	
16.25-24.25	.77	.25	.36	1"	<b>EP-108</b>	<b>EPP-10</b>	<b>EPX-10</b>	<b>EP-11054</b>	
19.25-29.00	.77	.25	.36	1"	<b>EP-210</b>	<b>EPP-10</b>	<b>EPX-10</b>	<b>EP-11054L</b>	
19.25-29.00	.77	.25	.36	1"	<b>EP-110</b>	<b>EPP-10</b>	<b>EPX-10</b>	<b>EP-11054L</b>	
26.00-38.00	1.25	.50	.38	1 1/4"	<b>EP-213</b>	<b>EPP-1316</b>	-	<b>EP-11354L</b>	
26.00-38.00	1.25	.50	.38	1 1/4"	<b>EP-113</b>	<b>EPP-1316</b>	-	<b>EP-11354L</b>	
31.50-45.50	1.44	.53	.46	1 1/4"	<b>EP-216</b>	<b>EPP-1316</b>	-	-	
31.50-45.50	1.44	.53	.46	1 1/4"	<b>EP-116</b>	<b>EPP-1316</b>	-	-	

Note: Overall length (B) is dependent on position of center bolt.

Dimensions (in)					Model Number
Overall Length	Slide Rod Diameter	Jaw Width	Tip Clearance	Tip Depth	
B	D	E	F	G	
29.00	.52	.33	.12	.06	<b>EPPMI-6</b>
31.00	.52	.33	.30	.18	



Visit the **Products** section of our web site for more information and product selection charts regarding puller sets and individual puller component parts. [www.enerpac.com](http://www.enerpac.com)

▼ Shown: EPHR-110



- Patented “Safety Cage” jaw retention system
- High force hydraulic system for effortless pulling of large components
- Slim tapered jaws for better gripping in tight spots
- Available in 2 and 3 jaw design
- More efficient pulling, as one man can do the job where normal pullers often require two operators



◀ An EPHR-116, 50-ton hydraulic Posi Lock® puller easily removes the main drive gear from this metal forming brake press.

## High-Tech Pulling



### Transport and Store

Conveniently store and transport hydraulic pullers and accessories. Order the **EPT-2550** Storage Cart and make your job easier to do!




### Long Jaws

Used to increase the reach and spread of pullers. They maintain the same pulling capacity as the standard jaws, but reduce clamping force to 25%.

Page: 161



Visit the **Products** section of our web site for more information and product selection charts regarding puller sets and individual puller component parts. [www.enerpac.com](http://www.enerpac.com)



### Application Tip

Because of the unique safety cage design, Posi Lock® pullers will grip on surfaces where normal pullers would slip off; e.g. tapered bearings.

### Basic Pullers only, cylinder not included.

Number of Jaws	Max. Spread (in)	Capacity (ton)	Model Number*
2	12.00	10	EPH-208
3	12.00		EPH-108
2	15.00	15	EPH-210
3	15.00		EPH-110
2	18.00	25	EPH-213
3	18.00		EPH-113
2	25.00	50	EPH-216
3	25.00		EPH-116

\*Cylinder is not included.

# Posi Lock® Hydraulic Grip Pullers

## ▼ SETS SELECTION CHART

Style	Capacity (ton)	Basic Puller	Cylinder	Stroke (in)	Pump Set	Set Model Number	Weight (lbs)
2 Jaw Puller	10	EPH-208	RC-106	6	-	EPHR208	24
	10	EPH-208	RC-106	6	EP-1	EPHS208	60
	15	EPH-210	RC-1510	10	-	EPHR210	49
	15	EPH-210	RC-1510	10	EP-1	EPHS210	85
	25	EPH-213	RC-2514	14.25	-	EPHR213	98
	25	EPH-213	RC-2514	14.25	EP-1	EPHS213	118
3 Jaw Puller	50	EPH-216	RC-5013	13.25	-	EPHR216	192
	10	EPH-108	RC-106	6	-	EPHR108	26
	10	EPH-108	RC-106	6	EP-1	EPHS108	62
	15	EPH-110	RC-1510	10	-	EPHR110	52
	15	EPH-110	RC-1510	10	EP-1	EPHS110	88
	25	EPH-113	RC-2514	14.25	-	EPHR113	106
	25	EPH-113	RC-2514	14.25	EP-1	EPHS113	126
50	EPH-116	RC-5013	13.25	-	EPHR116	202	

## EPH Series



Capacity:

**10-50 tons**

Maximum Reach:


**8.0-14.0 inches**

Maximum Spread:

**0.75-25.0 inches**

Maximum Operating Pressure:

**10,000 psi**

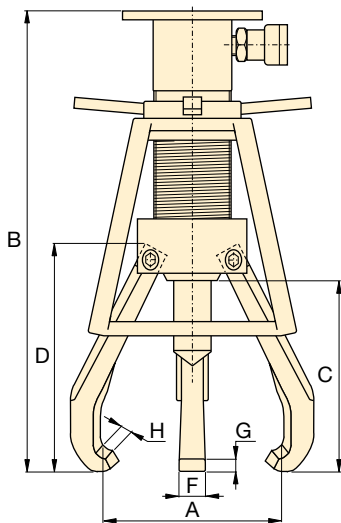



### Pump Sets

All Posi Lock Hydraulic Puller Sets that include 115 VAC pumps will feature the following components:

	EP-1 Pump Set
Pump	PUJ-1200B
Hose	HC-9210
Gauge	G-2535L

Components for 230 VAC pumps are available on request.




### ▼ \*Optional Accessory

Dimensions (in)							Weight (lbs)	Model Number			
Spread Range	Overall Length	Reach (max.)	Jaw Length	Jaw Width	Tip Clearance	Tip Depth					
A	B	C	D	F	G	H					
.75-12.0	19.61	8.00	9.34	.88	.29	.27	14	EPH-208	EPH-155	EPH-11052	EPH-11054
.75-12.0	19.61	8.00	9.34	.88	.29	.27	16	EPH-108	EPH-155	EPH-11052	EPH-11054
1.0-15.0	26.19	10.00	10.64	1.00	.441	.36	22	EPH-210	EPH-155	EPH-11052	EPH-11054L
1.0-15.0	26.19	10.00	10.64	1.00	.441	.36	25	EPH-110	EPH-155	EPH-11052	EPH-11054L
2.5-18.0	33.31	12.00	13.72	1.25	.508	.38	47	EPH-213	EPH-257	EPH-11352	EPH-11354L
2.5-18.0	33.31	12.00	13.72	1.25	.508	.38	55	EPH-113	EPH-257	EPH-11352	EPH-11354L
3.0-25.0	36.19	14.00	16.29	1.44	.598	.46	90	EPH-216	EPH-508	EPH-11652	-
3.0-25.0	36.19	14.00	16.29	1.44	.598	.46	100	EPH-116	EPH-508	EPH-11652	-

For full details on puller accessories see page 162.

\* Long Jaws are available as optional accessories.

## ▼ RAM POINT SETS SELECTION CHART

Fits Model Number	EPH-208 EPH-108 EPH-210 EPH-110	EPH-213 EPH-113	EPH-216 EPH-116
			
Set Number	EPH-155	EPH-257	EPH-508
Set Includes	Dia. x Length (in)	Dia. x Length (in)	Dia. x Length (in)
Flat Ram Point	1 x 1	1.5 x 2.25	2 x 3
	1 x 3	2 x 2.25	2.75 x 3
	–	2 x 4	2.75 x 5
Tapered Ram Point	1 x 1.5	1.5 x 2.5	2 x 3.75
	1 x 3.5	2 x 2.5	2 x 3.75
	–	2 x 4.5	2.75 x 5.5
Ram Point Adaptor	–	–	2.75 x 2.25



Always wear **Safety Goggles and Gloves** while using pullers.



Visit the **Products** section of our web site for more information and product selection charts regarding puller sets and individual puller component parts. [www.enerpac.com](http://www.enerpac.com)



## ▼ LIFT PLATE SELECTION CHART

Fits Puller Set Model Number	Model Number *	Thickness (in)	Diameter (in)
EPH-208	EPH-11052	.25	6
EPH-108	EPH-11052	.25	6
EPH-210	EPH-11052	.25	6
EPH-110	EPH-11052	.25	6
EPH-213	EPH-11352	.38	8
EPH-113	EPH-11352	.38	8
EPH-216	EPH-11652	.38	10
EPH-116	EPH-11652	.38	10



\* Mounting screws included. Lifting plates are standard included with EPH-Series Pullers.

◀ *EPH-116 used to remove electric motor pulleys. Puller is positioned using the Lift Plate.*

## ▼ LONG JAW SELECTION CHART

Model Number	Fits Puller Set Model Number	No. of Jaws Required	Spread Dimensions (in)	Reach (in)	Weight (each) (lbs)
EPH-11054	EPH-208	2	2.25 - 15.0	9.7	2.5
	EPH-108	3			
EPH-11054L	EPH-210	2	1.5 - 22.0	15.8	5.5
	EPH-110	3			
EPH-11354L	EPH-213	2	1.5 - 30.0	20.0	10.5
	EPH-113	3			



◀ **EPH-11054L**  
Long Jaws are used for added reach and spread. They have the same load capacity as standard jaws with 25% of the clamping force.

# Posi Lock® 100 Ton Hydraulic Grip Pullers


▼ EPH-1003



- Roller cart with power lift
- Adjustable jaw tips
- Puller easily detaches from cart
- Self-contained unit
- Puller height range 26.5" to 66.5"



◀ The EPH-1002 quickly and easily removes this drive coupler from its shaft.

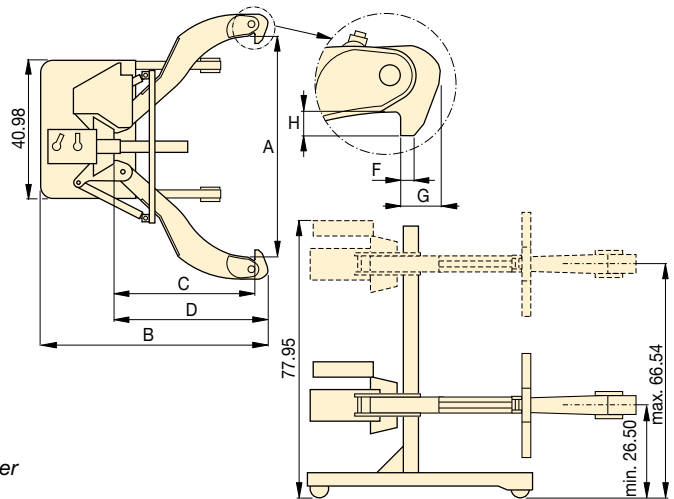

**EPH Series**




Capacity:  
**100 tons**

Maximum Reach:  
**48 inches**

Maximum Spread:  
**70 inches**

Maximum Operating Pressure:  
**10,000 psi**



**Pushing Adaptors**


All Posi Lock 100 Ton Hydraulic Pullers include (3) pushing adaptors.

Diameter	Overall Length	Model Number
3.5"	29"	EPHT-1162
3.5"	19"	EPHT-1163
3.5"	9"	EPHT-1164

Number of Jaws	Max. Spread (in)	Capacity (tons)	Model Number	Dimensions (in)							Weight (lbs)
				Spread Range	Overall Length	Reach (max.)	Jaw Length	Jaw Width	Tip Clearance	Tip Depth	
				A	B	C	D	F	G	H	
2	70.00	100	EPH-1002	7.5-70.0	77.00	48.00	53.00	1.25	3.5	3.5	1700
3	70.00		EPH-1003	7.5-70.0	77.00	48.00	53.00	1.25	3.5	3.5	1950

**E**NERPAC offers an extensive range of dedicated tools for a variety of specific and flexible applications. Whatever your requirement... cutting, punching, spreading or bending... you can be sure that Enerpac has the correct tool to do your job safely and efficiently.

Featuring maintenance sets, machine lifts and load skates, as well as hole punches, pipe benders and cable cutters, Enerpac has the tools to ensure that even your most demanding applications can be undertaken with the highest degree of safety and accuracy.



### Pump and Tool Sets

Selected hydraulic tools in this section are available in sets, for a perfect tool-pump match.



### Hydraulic System Set-up

Check out our “Yellow Pages” section for help on system set-ups and valving configurations.

Page:  244



### Bolting Tools

More Enerpac Tools can be found in the Bolting Tools section of this catalog.

Page:  186



# Tool Section Overview

Capacity (tons)	Tool Type and Functions	Series		Page
2.5-12.5	Maintenance Sets	MS		166 ▶
35-50	Punches	SP		170 ▶
16	Lifting Wedge	LW		174 ▶
20	Hydraulic Machine Lifts	SOH		175 ▶
1-80	Load Skates	ELP ER ES		176 ▶
.67-16 (ft <sup>3</sup> )	Storage Cases	CM		178 ▶
.75-1.00	Hydraulic Wedgie Spread Cylinders	A, WR		179 ▶
3-20	Hydraulic Cutterheads	WHC WHR		180 ▶
3-20	Self-Contained Hydraulic Cutters	WMC		181 ▶
Nominal Bore 1/2" - 4 inches	Pipe Benders	STB		182 ▶
20-30 Strand Diameter 3/8" - .6 inch	Mono-strand Post Tensioning Tools Multi-strand Stressing Tool	DA, PTJ		184 ▶

▼ Shown: **MS2-10**



## The Universal Hydraulic Tool Box



### Maintenance Sets

Enerpac Maintenance sets are a complete assortment of accessories matched to hydraulic powered tools. Using these sets allows you to quickly configure a unique tool to meet your most difficult jobs.

Built around the Enerpac lightweight hand pump, hose and cylinder, these sets enable you to push, pull, lift, press, straighten, spread and clamp with forces up to 12.5 tons.

- All sets include Enerpac pump, hose, cylinder and gauge
- Lock-on or threaded connectors
- Complete set for almost every maintenance application



### More Information






For detailed information on all included attachments, see the following pages.

Page: 168



◀ Clamping a workpiece is just one of the many applications for the Enerpac maintenance sets.

### ▼ QUICK SELECTION CHART

Capacity using attachments* (tons)	Set Model Number						Number of Attachment Components	Weight (lbs)
2.5	<b>MS2-4</b>	P-142	HC-7206	RC-55	GP-10S	GA-4	34	59
2.5	<b>MSFP-5**</b>	P-142	HC-7206	RC-55	G2535L	GA-3	24	44
5	<b>MSFP-10</b>	P-392	HC-7206	RC-106	G2535L	GA-3	22	105
5	<b>MS2-10</b>	P-392	HC-7206	RC-106	GP-10S	GA-2	35	140
12.5	<b>MS2-20</b>	P-392	HC-7206	RC-256	GP-10S	GA-2	13	210
5-12.5	<b>MS2-1020</b>	P-392	HC-7206	RC-102, -106, -256	GP-10S	GA-2	53	350

\* If no attachments are being used, capacity is double these values. Maximum operating pressure is then 10,000 psi.

\*\* This set also includes the FZ-1055 Adaptor.



# MS-Series, Maintenance Sets



## CAUTION!

When cylinders are used with maintenance set attachments or components, the maximum system pressure must be limited to half the rated pressure (5,000 psi).



## WARNING!

Only use attachments provided with set. Non-Enerpac attachments and longer extension tubes will reduce column strength, potentially creating unsafe conditions.

## MS Series




Capacity (using attachments):

**2.5-12.5 tons**

Max. Operating Pressure (using attachments):

**5,000 psi**

### ▼ APPLICATION EXAMPLES

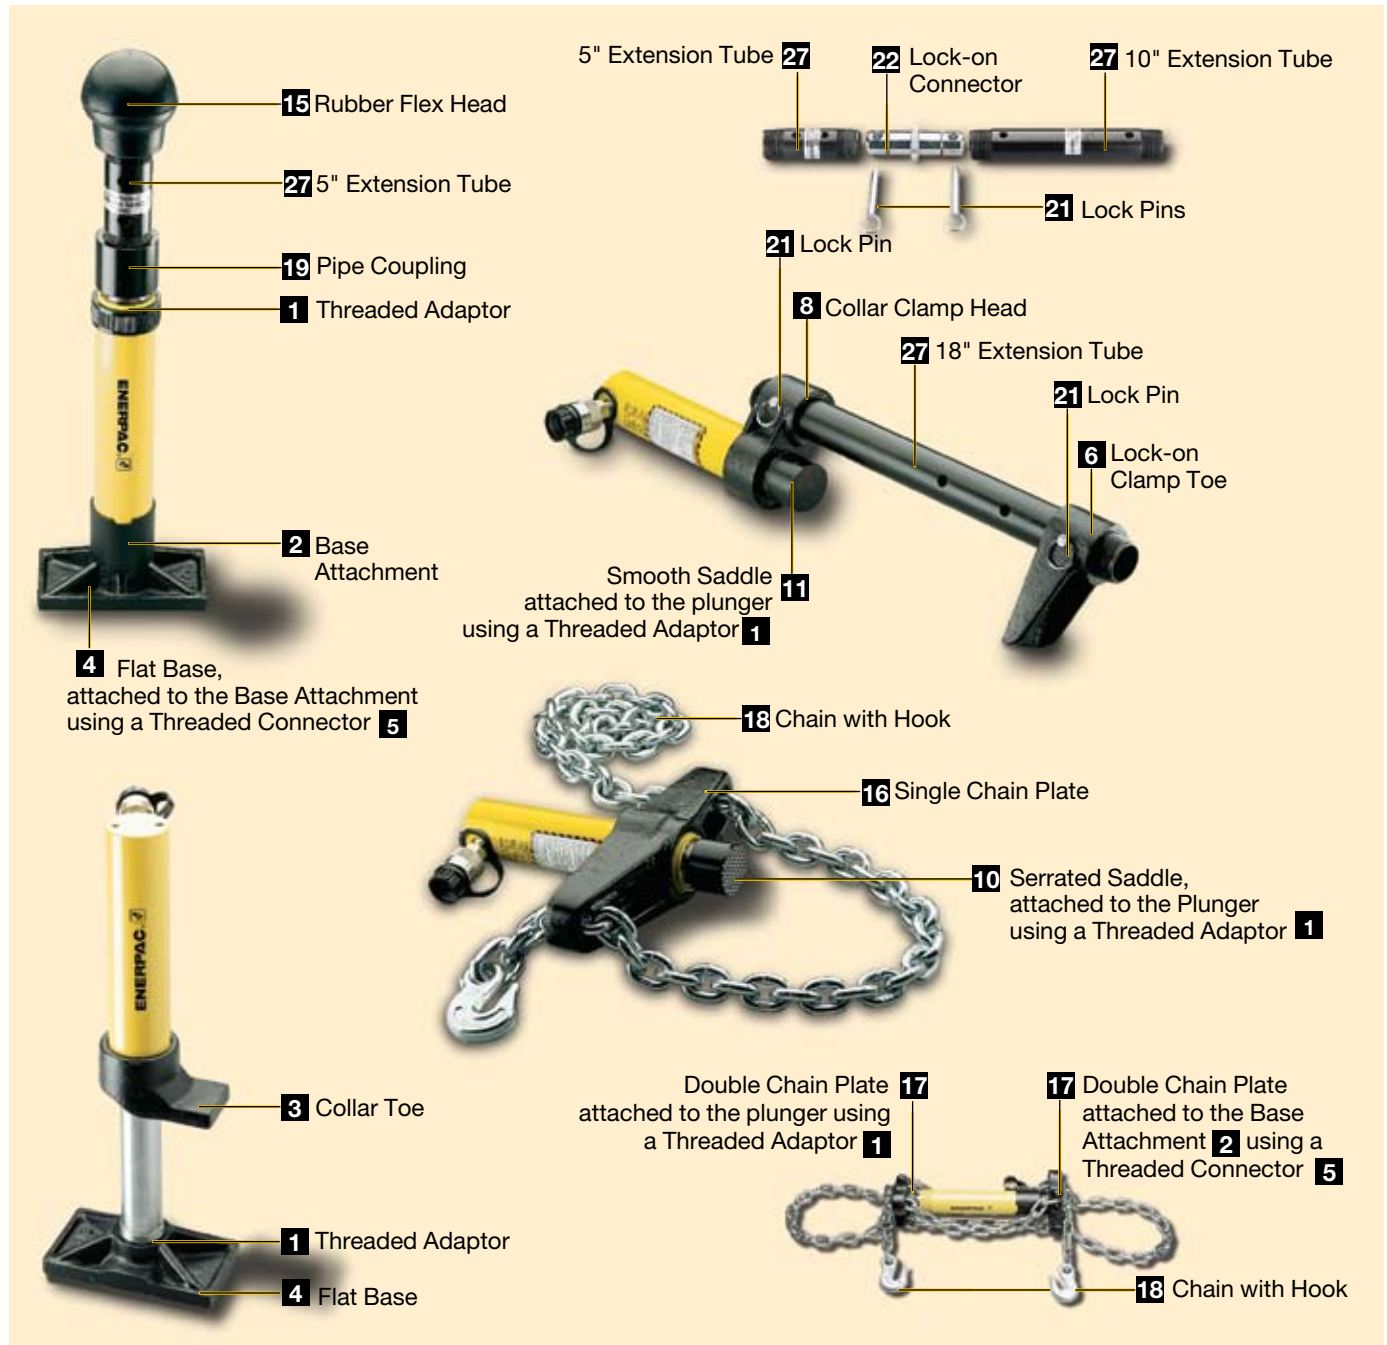

# MS-Series, Maintenance Sets




**CAUTION!** When cylinders are used with maintenance set attachments or components, the maximum system pressure must be limited to half the rated pressure (5,000 psi).

Note: All dimensions in inches.

Set Model No.	MS2-4	MSFP-5	MSFP-10	MS2-10	MS2-20	MS2-1020
<b>Base/Collar/ Plunger Attachments</b>	<b>Capacity Using Attachments</b>					
	2.5 tons	2.5 tons	5.0 tons	5.0 tons	12.5 tons	5-12.5 tons
<b>Cylinder Series</b>	RC-5	RC-5	RC-10	RC-10	RC-25	RC-10, RC-25
<b>1</b>	A-23	A-23	A-13	A-13	A-28	A-13 / A-28
<b>2</b>	A-25	A-25	A-21	A-21	A-27	A-21 / A-27
<b>3</b>	A-1034	A-1034	A-20	A-20	A-595	A-20 / A-595
<b>4</b>	MZ-4010	MZ-4010	A-14	A-14	A-243	A-14 / A-243
<b>5</b>	A-545	A-545	A-10	A-10	—	A-10(2x)
<b>6</b>	—	—	—	A-8	—	A-8
<b>7</b>	A-530	A-530	A-6	A-6	—	A-6
<b>8</b>	MZ-4011	—	—	A-192	—	A-192
<b>9</b>	—	—	—	A-305	—	A-305
<b>10</b>	A-531	A-531	A-18	A-18	—	A-18
<b>11</b>	—	—	—	A-185	—	A-185
<b>12</b>	A-532	A-532	A-15	A-15	—	A-15
<b>13</b>	—	—	—	—	A-607	A-607
<b>14</b>	A-629	A-629	A-129	A-129	—	A-129
<b>15</b>	A-539	A-539	A-128	A-128	—	A-128
<b>Chains and Attachments for Pulling</b>	2.5 tons	2.5 tons	5.0 tons	5.0 tons	12.5 tons	5-12.5 tons
<b>Cylinder Series</b>	RC-5	RC-5	RC-10	RC-10	RC-25	RC-10, RC-25
<b>16</b>	A-558	—	—	A-132	A-238	A-132, -238
<b>17</b>	—	—	—	A-5 (2x)	—	A-5(2x)
<b>18</b>	A-557(2x)	—	—	A-141(2x)	A-218(2x)	A-141(2x) / A-218(2x)
<b>Tubes, Connectors and Adaptors</b>	2.5 tons	2.5 tons	5.0 tons	5.0 tons	12.5 tons	5-12.5 tons
<b>Cylinder Series</b>	RC-5	RC-5	RC-10	RC-10	RC-25	RC-10, RC-25
<b>19</b>	A-544	—	—	A-19(2x)	A-242(2x)	A-19(2x) / A-242(2x)
<b>20</b>	—	—	—	—	—	—
<b>21</b>	WR-5	WR-5	WR-5	A-92	—	A-92
<b>22</b>	MZ-4013(4x)	MZ-4013(4x)	A-16(4x)	A-16(4x)	—	A-16(4x)
<b>23</b>	MZ-4007(3x)	MZ-4007(3x)	MZ-1050(3x)	MZ-1050(2x)	—	MZ-1050(3x)
<b>24</b>	MZ-4008(2x)	—	—	MZ-1051	—	MZ-1051(2x)
<b>25</b>	MZ-4009	MZ-4009	MZ-1052	MZ-1052	—	MZ-1052
<b>26</b>	—	—	—	A-285	—	A-285
<b>27</b>	A-650	—	—	—	—	—
<b>Length: 3"</b>	MZ-4002	MZ-4002	—	—	—	—
	5"	MZ-4003	MZ-4003	MZ-1002	MZ-1002	—
	10"	MZ-4004	MZ-4004	MZ-1003	MZ-1003	A-239
						and A-239
	18"	MZ-4005(2x)	MZ-4005	MZ-1004	MZ-1004	A-240
						and A-240
	23"	MZ-4006(1x)	MZ-4006	—	—	—
	30"	—	—	MZ-1005	MZ-1005	A-241
						and A-241
<b>Case</b>	CM-6	CM-6	CW-166	CW-166	CW-166	CW-350
<b>Weight</b>	59 lbs.	44 lbs.	105 lbs.	140 lbs.	210 lbs.	350 lbs.


## Base/Collar/Plunger Attachments

### 1 Threaded Adaptor




Tons	Model No.	A	B	C	D
2.5	A-23	3/4"-16 UN	1.13	1.05	3/4"-14 NPT
5.0	A-13	1"-8 UN	1.25	2.19	1 1/4"-11 1/2 NPT
12.5	A-28	1 1/2"-16 UN	1.87	2.75	2"-11 1/2 NPT

### 2 Base Attachment




Tons	Model No.	A	B	C	D
2.5	A-25	3/4"-14 NPT	2.00	.50	1.75
5.0	A-21	1 1/4"-11 1/2 NPT	2.25	.50	2.56
12.5	A-27	2"-11 1/2 NPT	2.50	.50	3.88

### 3 Collar Toe



Tons	Model No.	A	B	C	D
2.5	A-1034	1 1/2"-16 UN	2.13	1.97	1.25
5.0	A-20	2 1/4"-14 UN	3.16	2.25	2.25
12.5	A-595	3 3/8"-12 UN	4.06	2.03	3.18


### 4 Flat Base



Tons	Model No.	A	B	C	D
2.5	MZ-4010	3/4"-14 NPT	4.50	1.25	2.50
5.0	A-14	1 1/4"-11 1/2 NPT	6.50	1.38	3.50
12.5	A-243*	2"-11 1/2 NPT	6.50	2.31	6.50


\* A-243 is a round base model

### 5 Threaded Connector



Tons	Model No.	A	B
2.5	A-545	3/4"-14 NPT	1.38
5.0	A-10	1 1/4"-11 1/2 NPT	1.63


### 6 Lock-on Clamp To



Tons	Model No.	A	B	C	D
5.0	A-8	1.69	4.13	2.00	2.25


# MS-Series, Maintenance Sets

## 7 Threaded Plunger Toe




Tons	Model No.	A	B	C	D
2.5	A-530	¾"-14 NPT	2.25	1.00	1.33
5.0	A-6	1¼"-11½ NPT	3.12	1.25	2.25

## 8 Collar Clamp Head




Tons	Model No.	A	B	C	D
2.5	MZ-4011	¾"-14 NPT	1.95	3.00	1½-16 UN
5.0	A-192	1.69	2.50	2.00	2¼-14 UN

## 9 Spreader Toe




Tons	Model No.	A	B	C	D
5.0	A-305	1¼"-11½ NPT	4.50	1.00	2.00

## 10 Serrated Saddle




Tons	Model No.	A	B	C
2.5	A-531	¾"-14 NPT	1.25	1.09
5.0	A-18	1¼"-11½ NPT	2.00	1.50

## 11 Smooth Saddle




Tons	Model No.	A	B	C
5.0	A-185	1¼"-11½ NPT	1.50	2.00

## 12 90° V-Base




Tons	Model No.	A	B	C	D
2.5	A-532	¾"-14 NPT	1.50	1.88	1.00
5.0	A-15	1¼"-11½ NPT	2.13	2.25	2.13

## 13 Plunger Base




Tons	Model No.	A	B	C
12.5	A-607	2"-11½ NPT	6.56	1.53

## 14 Wedge Head



Tons	Model No.	A	B	C	D
2.5	A-629	¾"-14 NPT	2.75	1.31	1.13
5.0	A-129	1¼"-11½ NPT	4.00	2.00	1.75


## 15 Rubber Flex-Head



Tons	Model No.	A	B	C
2.5	A-539	¾"-14 NPT	1.75	2.75
5.0	A-128	1¼"-11½ NPT	3.40	3.40


## Chains and Attachments for Pulling

### 16 Single Chain Plate



Tons	Model No.	A	B	C	D
2.5	A-558	1½"-16 UN	7.75	1.56	1.75
5.0	A-132	2¼"-14 UN	12.12	2.50	3.12
12.5	A-238	3¾"-12 UN	17.75	4.03	4.93

### 17 Double Chain Plate



Tons	Model No.	A	B	C	D
5.0	A-5	1¼"-11½ NPT	6.18	2.00	4.96


### 18 Chain with Hook



Tons	Model No.	Chain Length
2.5	A-557	5 feet
5.0	A-141	6 feet
12.5	A-218	8 feet


## Tubes, Connectors and Adaptors

### 19 Pipe Coupling




Tons	Model No.	A	B	C
2.5	A-544	¾"-14 NPT	1.69	1.31
5.0	A-19	1¼"-11½ NPT	1.94	2.15
12.5	A-242	2"-11½ NPT	3.50	3.25

## 20 Spreader




Tons	Model No.	A	B	C	D
1.0	WR-5	—	8.78	.50	3.70
1.0	A-92	2¼"-14 UN	9.63	1.38	6.25

## 21 Lock Pin




Tons	Model No.	A	B
2.5	MZ-4013	.25	2.38
5.0	A-16	.44	3.25

## 22 Lock-on Connector




Tons	Model No.	A	B
2.5	MZ-4007	.75	3.12
5.0	MZ-1050	1.31	5.00

## 23 Male Lock-on Adaptor




Tons	Model No.	A	B	C
2.5	MZ-4008	¾"-14 NPT	2.38	.75
5.0	MZ-1051	1¼"-11½ NPT	3.56	1.31

## 24 Female Lock-on Adaptor




Tons	Model No.	A	B	C
2.5	MZ-4009	¾"-14 NPT	2.56	.75
5.0	MZ-1052	1¼"-11½ NPT	3.81	1.31

## 25 Adjustable Extension



Tons	Model No.	A	B	C	D
5.0	A-285	1¼"-11½ NPT	13.20	17.37	1.30

## 26 Slip-Lock Extension



Tons	Model No.	A	B	C
2.5	A-650	¾"-14 NPT	7.88	14.37

▼ Shown: SP-35S



- .50" thick mild steel maximum capacity
- Round, oblong and square punches and dies are available to solve your punching applications
- Long life Enerpac single-acting, spring return design
- Durable steel case keeps tools and dies together and provides for easy carrying and storage
- CR-400 female coupler included

## Much Faster than Drilling...



### Tool Kit SPK-10

Included with all 35 ton punches, this tool kit is used to remove and install the punch into the head.

Can be ordered as a replacement under model number **SPK-10**.



### Ordering Information

The 35-ton hydraulic punch may be ordered by itself or as a set, including an electric, air or hand pump.

Please refer to the Quick Selection Chart information on next page.

A punch and die may also be ordered as a matched set.

### ▼ STANDARD PUNCH AND DIE SETS SELECTION CHART

Hole Shape	Imperial*		Metric*	
	Hole Size (in)	Bolt Size (in)	Hole Size (mm)	Bolt Size (mm)
●	.31	1/4	7,9	–
●	.38	5/16	9,5	M8
●	.44	3/8	11,1	M10
●	.53	7/16	13,5	M12
●	.56	1/2	14,3	–
●	.69	5/8	17,5	M16
●	.78	–	19,8	M18
●	.81	3/4	20,6	–
■	.31	1/4	7,9	–
■	.38	5/16	9,5	M8
■	.44	3/8	11,1	M10
■	.50	7/16	12,7	M12
○	.31 x .75	1/4	7,9 x 19	–
○	.38 x .75	5/16	9,5 x 19	M8
○	.44 x .75	3/8	11,1 x 19	M10
○	.50 x .75	7/16	12,7 x 19	M12




◀ This PUD-1100B is shown with the 35 ton punch and optional gauge.

\* Material thickness should **not** exceed hole diameter.

# Single-Acting, Spring Return Hydraulic Punch

## ▼ QUICK SELECTION CHART

	Included				Model Number	Weight (lbs)
	Punch and Die Set	Pump	Pump Type	Hose		
SP-35	-	-	-	-	SP-35	35
SP-35	Standard**	-	-	-	SP-35S	40
SP-35	Standard**	PUD-1100B	E	HC-7206	SP-35SP	70
SP-35	Metric***	-	-	-	MSP-351	40
SP-35	Standard**	P-392	H	HC-7206	STP-35H	55
SP-35	Standard**	PATG-1102N	A	HC-7206	STP-35A	63

\* Punch oil capacity: 4.58 in<sup>3</sup>

Includes the following punch and die sets:

\*\* SPD-438, SPD-688, SPD-563 and SPD-813

\*\*\* SPD-375, SPD-531, SPD-438 and SPD-688

E = Electric

H = Hand

A = Air operated

## SP Series



Capacity:


**35 tons**

Hole Sizes:

**0.31-0.81 inch**

Maximum Operating Pressure:

**10,000 psi**

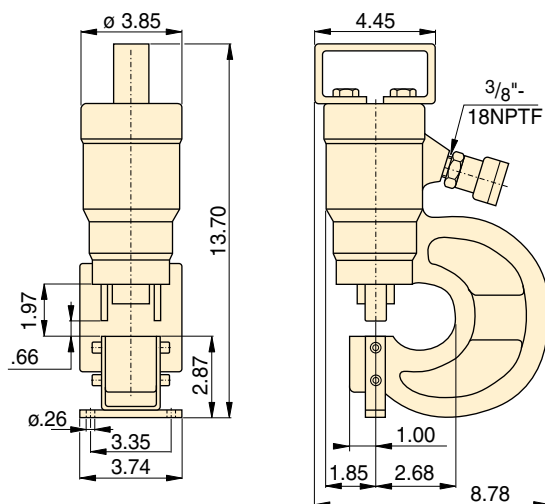


### CAUTION!

Chart below is for reference only! Maximum allowable material thickness to be punched varies with set wear.



### CAUTION!

Material thickness should not exceed hole diameter.

	Maximum Allowable Material Thickness To Be Punched										
	(in)										
Model No.	1)	2)	3)	4)	5)	6)	7)	8)	9)	10)	11)
SPD-313	.31	.31	.25	.25	.25	.25	.13	.19	.25	.25	.25
SPD-375	.38	.38	.31	.31	.31	.31	.19	.25	.31	.31	.31
SPD-438	.44	.44	.38	.38	.38	.31	.19	.31	.31	.31	.31
SPD-531	.50	.50	.44	.44	.44	.38	.25	.31	.38	.38	.38
SPD-563	.50	.50	.50	.44	.50	.44	.25	.38	.44	.44	.44
SPD-688	.50	.50	.50	.44	.50	.40	.25	.31	.40	.40	.40
SPD-781	.50	.50	.50	.44	.50	.38	.25	.31	.38	.39	.38
SPD-813	.50	.50	.50	.44	.50	.31	.19	.31	.31	.31	.31
SPD-458	.31	.31	.25	.25	.25	.25	.13	.19	.25	.25	.25
SPD-549	.38	.38	.31	.31	.31	.31	.19	.25	.31	.31	.31
SPD-639	.44	.44	.38	.38	.38	.31	.19	.31	.31	.31	.31
SPD-728	.50	.50	.44	.44	.44	.38	.25	.31	.38	.38	.34
SPD-106	.31	.31	.25	.25	.25	.25	.13	.19	.25	.25	.25
SPD-125	.38	.38	.31	.31	.31	.31	.19	.25	.31	.31	.31
SPD-188	.44	.44	.38	.38	.38	.31	.19	.31	.31	.31	.31
SPD-250	.50	.50	.44	.44	.44	.38	.25	.31	.38	.38	.38

### Steel Qualities (see table):

- 1) Mild A-7
- 2) Boiler Plate
- 3) Structural A-36
- 4) Struct Corten (ASTM A242)
- 5) Cold Rolled C-1018
- 6) Hot Rolled C-1050
- 7) Hot Rolled C-1095
- 8) Hot Rolled C-1095 Annealed
- 9) Stainless Annealed
- 10) Stainless 304 Hot Rolled
- 11) Stainless 316 Cold Rolled

▼ Shown: SP-50100



- Available as a complete set including electric pump and hoses
- Double-acting cylinder design for fast cycle times
- Punch and die changeover tools included
- Lifting handle for easy carrying
- Adjustable power stripper prevents movement of the metal during stripping
- CR-400 female couplers included



◀ Save time using this 50-ton Enerpac Punch.

## Cuts the Time Spent Forming Holes



### Depth Stop

For simplified repetitive punching applications an adjustable Depth Stop is available.

Order model number: **SP-110.**



### Foot Mounting Kit

A foot mounting kit for easy mounting of the 50 ton punch to workbench or fixture is available.

Please order: **SP-120.**



### Ordering Information


The 50-ton Hydraulic Punch may be ordered by itself or as a set with an electric pump. A punch and die may be ordered as a matched set. Please refer to the selection chart information.

▼ Shown below is the 50 ton punch with SP-120 and SP-110 assembled.




# 50 Ton Hydraulic Punch

## ▼ QUICK SELECTION CHART PUNCH SETS


Model Number Punch*	Included			Set Model Number	Weight  (lbs)
	Punch & Die Sets 	Pump	Hose (2x)		
SP-50	All**	-	-	SP-50100	255
SP-50	All**	ZE4410SB	HC-7206	SP-5000	384

\* Punch Oil Capacity:  
Advance: 17 in<sup>3</sup>  
Retract: 14 in<sup>3</sup>



\*\* All standard sets from chart below.




SP-110



SP-120

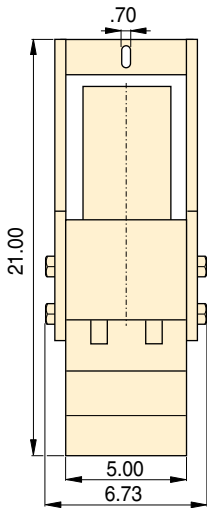

SP-50

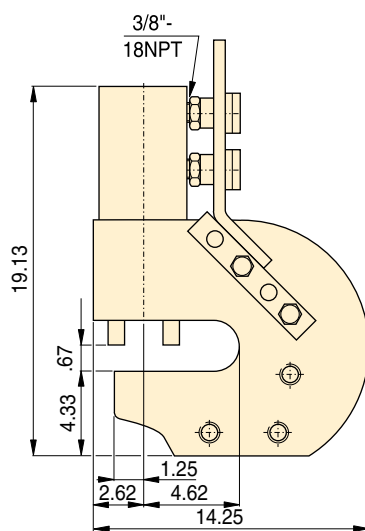

## SP Series



Capacity:

**50 tons**

Hole Sizes:

**0.53-1.03 inches**

Maximum Operating Pressure:

**10,000 psi**



### CAUTION!

Material thickness should not exceed hole diameter.




### CAUTION!

Chart below is for reference only! Maximum allowable material thickness to be punched varies with set wear.

### Steel Qualities (see table below):

- 1) Mild A-7
- 2) Boiler Plate
- 3) Structural A-36
- 4) Struct Corten (ASTM A242)
- 5) Cold Rolled C-1018
- 6) Hot Rolled C-1050
- 7) Hot Rolled C-1095
- 8) Hot Rolled C-1095 Annealed
- 9) Stainless Annealed
- 10) Stainless 304 Hot Rolled
- 11) Stainless 316 Cold Rolled

## ▼ STANDARD PUNCH AND DIE SELECTION CHART

Hole Shape	Hole Size  (in)	Bolt Size  (in)	Standard Punch and Die Set   Model Numbers	Maximum Allowable Material Thickness To Be Punched  (in)										
				1)	2)	3)	4)	5)	6)	7)	8)	9)	10)	11)
●	.53	1/2	SP-150	.53	.53	.53	.53	.53	.49	.32	.40	.49	.49	.49
●	.66	5/8	SP-170	.56	.56	.56	.50	.56	.51	.32	.40	.51	.51	.51
●	.78	3/4	SP-190	.56	.56	.56	.50	.56	.49	.32	.40	.49	.50	.49
●	.91	7/8	SP-121	.56	.56	.56	.50	.56	.35	.22	.35	.35	.35	.35
●	1.03	1	SP-123	.56	.56	.56	.44	.56	.31	.19	.31	.31	.31	.31

# Vertical Lifting Wedge

▼ Shown: LW-16 with SB-2 and optional LWB-1



## LW Series

Minimum Clearance:

**.39 inches**

Maximum Lift Height:

**2.02\*-2.72\* inches**

Maximum Force:

**16 tons**

Maximum Operating Pressure:

**10,000 psi**



### ER-Series Load Skates

In combination with the Enerpac Lifting Wedge we recommend Load Skates for moving heavy loads.

Page: 176




### Split-Flow Manifolds

Split Flow Valves to control two or four lifting wedges simultaneously.

AM-21 with 3 ports 3/8" NPTF.  
AM-41 with 5 ports 3/8" NPTF.


Page: 122

- Requires .39 inch access gap
- Lifting force 16 ton at 10,000 psi hydraulic pressure
- Automatic mechanical retraction (single acting)
- Securely raises or lowers 16 tons with no slippage
- Lifting wedge LW-16 includes safety block SB-2
- Use in tandem to lift 32 tons, or 64 tons
- .83 inch of vertical lift from each step (maximum lift to 2.72 inches with optional LWB-1 stepped block)

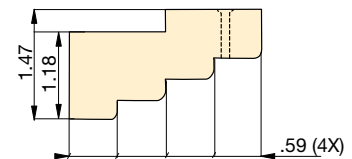

▲ Optional LWB-1 Stepped Block

▼ For lifting heavy equipment with minimum floor clearance the LW-16 is the ideal tool.

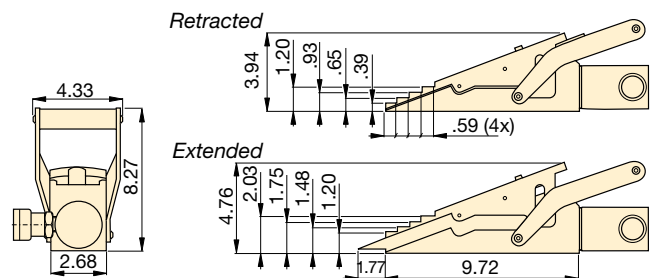

LW-16

Max. Lifting Force (ton)	Model No.	Minimum Clearance Gap (in)	Max. Lift per Stage (in)	Max. Lifting Height (in)	Max. Lifting Height Using Stepped Block (in)	Oil Capacity (in <sup>3</sup> )	Weight (lbs)
16	LW-16	.39	.83	2.02	2.72	4.75	15.4

\*Use optional stepped block LWB-1 to increase wedge lifting height .69 inches.



# Hydraulic Machine Lifts

▼ Shown from left to right: SOH-10-6, SOH-23-6



## SOH Series

Lifting Capacity:

**8.5-20 tons**

Stroke:

**5.39-6.18 inches**

Toe Clearance:

**0.79-1.18 inches**

Maximum Operating Pressure:

**10,000 psi**



### RSM Flat-Jac®

Low height, single acting spring-return cylinders are ideal for space restricted applications.

Page: 22

- For lifting heavy equipment with minimum available access
- Remote operation of hydraulic pump enhances safety
- Low-height lifting toe
- Precision guided to reduce friction and isolate cylinder from side-loads
- Two extendable support feet provide extra stability
- Includes RC-Series cylinder with CR-400 coupler




### Best Match Manual Pump

To power your Enerpac Lifting Wedge, The Enerpac P-392 Hand Pump or P-392FP Foot Pump is an ideal choice.

Page: 62

▼ Limited access under this machine makes the Enerpac Hydraulic Machine Lift the perfect solution.

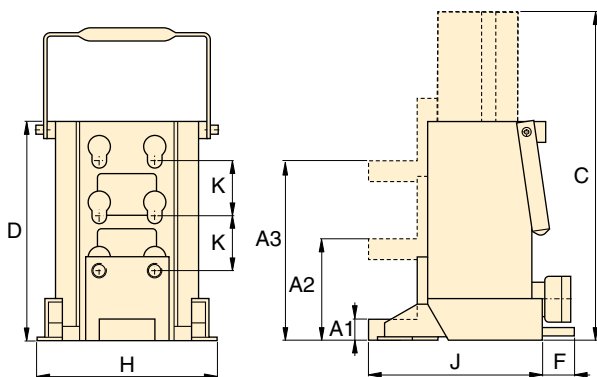

Capacity (ton)	Toe Clearance with Cylinder Retracted (in)			Stroke (in)	Model Number	Oil Capacity (in <sup>3</sup> )	Dimensions (in)						Weight (lbs)
	Minimum A1	Central A2	Maximum A3				Total Ext. Height C	Total Body Height D	F	H	J	K	
8.5	.79	3.74	6.69	5.39	SOH-10-6	13.7	17.00	11.61	–	7.48	8.46	2.95	59.2
20	1.18	4.33	7.48	6.18	SOH-23-6	32.0	18.58	12.40	2.56	10.24	9.84	3.15	99.2

▼ Shown: Set ERS-20



## Move Heavy Loads Easily and Safely



Sets (see table) include all components necessary to handle a variety of applications. Two **ELB-1** link-up bars, two **ERH-1** handles (34.6" long) and one **EMB-1** metal box are included. Optional long handle **ERH-2** (46") also available.



### Lifting Wedge and Machine Lifts




To place the Load Skates, the load must first be lifted. This can be done easily and safely using Enerpac Lifting Wedge or Machine Lifts.

Page: 174

- Rugged and sturdy construction for long life
- Low profile construction for increased stability
- Low rolling-resistance allows for easy load movement
- Attachable load leveling plates and swivel turntables for turning corners



▼ Load Skates may be ordered separately or as a matched set.

Set Capacity*	Set Model Number	Load Skates (4)	Turntable Swivels (2)	Leveling Plates (2)	Weight Including handles and metal box
(tons)					(lbs)
20	<b>ERS-20</b>	ER-10	ES-10	ELP-10	110
30	<b>ERS-30</b>	ER-15	ES-15	ELP-15	123
60	<b>ERS-60</b>	ER-30	ES-30	ELP-30	167

\* Sets are designed to enable two skates to take full load for extra safety on uneven floor surfaces



◀ Heavy transport using Load Skates. The machine is first lifted, using SOH-Series Enerpac Machine Lifts.

# Heavy-Duty Caterroller™ Load Skates



**ELP,  
ER,  
ES  
Series**




Maximum Carrying Capacity:  
**80 tons**

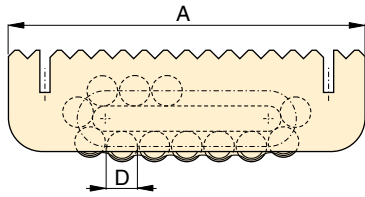


**ER-1, ER-10, ER-15, ER-30**

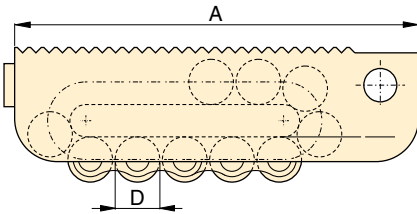


**ER-60, ER-80**




**Turntable Swivel  
ES-1, ES-10, ES-15, ES-30**






**Turntable Swivel  
ES-60, ES-80**



**Leveling Plate  
ELP-10  
ELP-15  
ELP-30**



**Leveling Plate  
ELP-60  
ELP-80**

	Capacity (ton)	Model Number	Dimensions (inch)						Contact Rolls per Skate	Rollers per Skate	Weight (lbs)
			A	B	C	D	E	F			
<b>Load Skates</b> 	1	ER-1	6.30	3.94	2.56	.71	2.00	.16	4	11	8.4
	10	ER-10	8.27	3.94	2.63	.71	2.00	.24	5	15	11.5
	15	ER-15	8.69	4.45	2.95	.94	2.38	.39	4	13	16.0
	30	ER-30	10.63	5.13	3.63	1.18	2.69	.39	4	13	28.6
	60	ER-60	15.00	6.63	4.94	1.65	3.00	.63	4	13	70.4
	80	ER-80	20.88	7.19	5.75	1.97	3.38	.75	6	17	134.2
<b>Turntable Swivel</b> 	1	ES-1	8.15	3.42	1.02	3.54	-	-	-	-	2.4
	10	ES-10	8.66	2.87	1.65	5.12	-	-	-	-	8.1
	15	ES-15	8.66	3.38	1.65	5.12	-	-	-	-	8.1
	30	ES-30	9.87	3.78	1.89	5.91	-	-	-	-	11.7
	60	ES-60	10.83	4.50	2.40	7.48	-	-	-	-	30.1
	80	ES-80	14.19	5.06	2.40	8.66	-	-	-	-	41.6
<b>Leveling Plate</b> 	10	ELP-10	5.87	2.87	1.65	4.72	-	-	-	-	8.1
	15	ELP-15	5.87	3.38	1.65	4.72	-	-	-	-	8.1
	30	ELP-30	7.00	3.78	1.89	5.31	-	-	-	-	11.6
	60	ELP-60	10.63	4.50	2.40	7.09	4.49	-	-	-	30.4
	80	ELP-80	13.78	5.06	2.40	7.87	5.04	-	-	-	41.4

▼ Shown: **CM-16**



- Protect your equipment from dust, water, grease and dirt
- Reduce losses on the jobsite, maintenance area or shop
- Durable steel, painted with rust-resistant primer and finished in durable enamel
- Heavy duty hinges and lifting handles
- Lockable

## CM Series

Case Size:

**.67-16 Cubic Ft.**

## Protect your Equipment



### Maintenance Sets

Enerpac Maintenance sets are a complete assortment of accessories matched to hydraulic powered tools. Using these sets allows you to quickly configure a unique tool to meet your most difficult jobs.

Built around the Enerpac lightweight hand pump, hose and cylinder, these sets enable you to push, pull, lift, press, straighten, spread and clamp with forces up to 12.5 tons.



### Hydraulic Pullers

These hydraulic pullers eliminate time-consuming and unsafe hammering, heating or prying.

Damage to parts is minimized through the use of controlled hydraulic power.

Page: **151**

▼ When not storing the lifting system, this heavy-duty storage case doubles as a work station.



Case Size	Model Number	Dimensions L x W x H	Thickness	Weight
(ft <sup>3</sup> )		(in)	(in)	(lb)
.67	<b>CM-6</b>	23.5 x 7 x 7	.035	15.4
1.13	<b>CM-1</b>	25 x 11.5 x 6.6	.035	17.6
4.50	<b>CM-4</b>	31 x 18 x 14	.059	35.3
7.50	<b>CM-7</b>	47.5 x 15 x 18	.074	125.7
16.00	<b>CM-16</b>	48 x 24 x 24	.059	121.3

# Hydraulic Wedgie and Spread Cylinders

▼ Shown clockwise from top: **WR-13, WR-5, A-92, WR-15**



- Single-acting, spring return
- **WR-13:** Integrated pump offers portable power
- **WR-15:** For long stroke spreading applications
- **WR-5:** For use in very confined work areas
- **A-92:** Spreader attachment screws onto RC-Series 10 ton cylinders (except RC-101)

## A, WR Series

Capacity:  
**0.75-1.50 ton**

Tip Clearance:  
**0.50-1.38 inches**

Maximum Spread Range:  
**3.70-11.50 inches**

Maximum Operating Pressure:  
**10,000 psi**



### RC-Series Cylinders

10 ton RC-Series cylinders (except RC-101) fit into A-92 Spreader Attachment.

Page: **6**




### Best Match Hand Pump


To power your WR5 and WR15 the **P-392** hand pump is an ideal choice.

Page: **62**


**WR-5**




**A-92**



**WR-15**

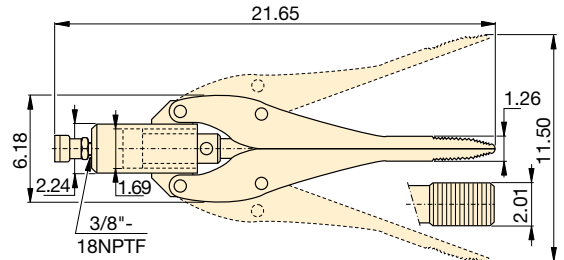

**WR-13**

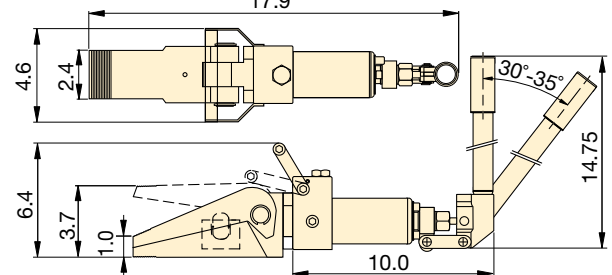

◀ *The portable Integrated Spreader gives you the power you need, fast. A WR13 Integrated Spreader is used to free a frozen rail switch.*

Spreader Capacity	Tip Clearance	Model Number	Maximum Spread	Cylinder Effective Area	Oil Capacity	Wt.
(ton)	(in)		(in)	(in <sup>2</sup> )	(in <sup>3</sup> )	(lbs)
1.00	.50	<b>WR-5</b>	3.70	1.00	.61	5.0
1.50	1.00	<b>WR-13</b>	3.70	1.76	—	26.4
.75	1.26	<b>WR-15</b>	11.50	2.25	3.91	25.0
1.00	1.38	<b>A-92</b>	6.25	—	—	8.0

▼ Shown from left to right: WHC-3380, WHC-750




- Single acting, spring return on all models, except WHR-1250
- Guillotine action for efficient operation
- Lifting handles on larger models
- Carrying bag included for easy carrying and tool protection
- Ideal for use with most Enerpac pumps featuring 3-way valve or dump valve and 10,000 psi pressure rating (except WHR-1250, which requires 4-way valve)
- CR-400 coupler and dust cap included on all models

## WHC, WHR Series

Capacity:  
**3-20 tons**

Cutting Capacity:  
**0.50-4 inches**

Maximum Operating Pressure:  
**10,000 psi**

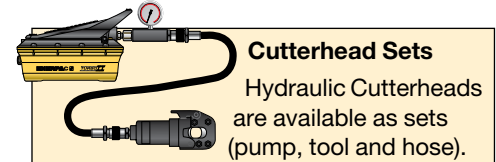


### Cutterhead Sets

Hydraulic Cutterheads are available as sets (pump, tool and hose).

Set Model Number	Cutter Model Number	Pump Model Number
STC-750H	WHC-750	P-392
STC-750A	WHC-750	PATG-1102N
STC-1250H	WHC-1250	P-392
STC-1250A	WHC-1250	PATG-1102N
STC-750FP	WHC-750	P-392FP
STC-1250FP	WHC-1250	P-392FP

H = Hand Pump, A = Air Operated Pump  
FP = Foot Pump

▼ Steel rope is easily cut with the smooth guillotine action of an Enerpac cutterhead.

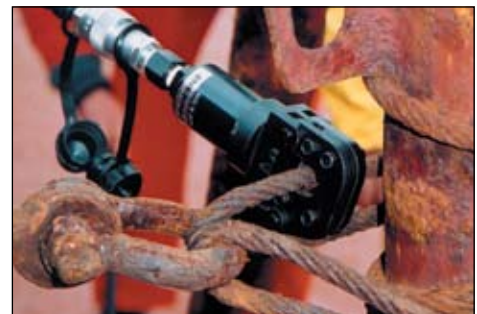

### ▼ Selection Chart Maximum Cutting Capacities (diameter in inches)

Cutter Head Operation	Capacity (ton)	Model Number	Oil Capacity (in <sup>3</sup> )	Length (in)	Steel Wire Rope, Hemp-core or IWRC  6x7 6x12 6x19	Round Bar				Wire Strand			Cable		Wt. (lbs)	Replacement Blades	
						Copper Wire or Bar	Aluminum Wire or Bar	Soft Steel Bolts	Reinforcing Bar	Bare Copper Wire Strands	Bare Aluminum Wire Strands	ACSR	Guy Steel Wire Strands	Telephone Cable CPP			Underground Cable (Power)
Single-acting	4	WHC-750*	1.2	5.0	.63	.75	.75	.75	.50***	.75	.75	.75	.63	☆	☆	7	WCB-750
	20	WHC-1250*	8.2	11.00	1.25	1.13	1.25	1.13	1.00	1.25	1.25	1.25	.88	☆	☆	25	WCB-1250
	13	WHC-2000	7.3	15.00	1.00	1.25	1.25	.88	☆	2.00	2.00	2.00	.75	☆	2.00	23	WCB-2000
	3	WHC-3380	4.0	19.00	☆	☆	☆	☆	☆	1.63	1.69	☆	☆	3.38	3.38	20	WCB-3380
	8	WHC-4000	8.4	24.00	☆	☆	☆	☆	☆	☆	☆	☆	☆	4.00	4.00	32	WCB-4000
D/A**	20	WHR-1250	7.5	16.50	1.25	1.25	1.25	1.13	1.00	1.25	1.25	1.25	.88	☆	☆	26	WCB-1250

\* Available in sets. \*\* D/A = Double-acting \*\*\* Low Alloy

☆ Will not cut designated material

# Self-Contained Hydraulic Cutters

▼ Shown from left to right: **WMC-2000, WMC-750**



## WMC Series

Capacity:

**3-20 tons**

Maximum Material Diameter:

**0.38-3.38 inches**

Maximum Operating Pressure:

**10,000 psi**



### Replacement Blades

To order 60-62HRC hardened replacement blades use one of the model numbers shown below.

For Cutter Model Number	Order Blade Model Number
WMC-580	<b>WCB-750</b>
WMC-750	<b>WCB-750</b>
WMC-1000	<b>WCB-1000</b>
WMC-1250	<b>WCB-1250</b>
WMC-1580	<b>WCB-1580</b>
WMC-2000	<b>WCB-2000</b>
WMC-3380	<b>WCB-3380</b>

- Rotating heads for operator convenience
- Guillotine action (except WMC-1000) for efficient operation
- Carrying bag included for easy carrying and tool protection
- Velcro straps to secure handles on larger models for easy transportation
- Spring return on all models
- Lightweight, self-contained tool, can be used anywhere



### Caution!

A “☆” in the charts on these pages means that this hydraulic cutter is not designed to cut this size or type of material. Any attempt to do so may result in personal injury and damage to the unit and will void the warranty.

### ▼ Selection Chart Maximum Cutting Capacities (diameter in inches)

Capacity (ton)	Model Number	Length (in)	Steel Wire Rope, Hemp-core or IWRC 6x7 6x12 6x19	Round Bar				Wire Strand					Cable		Weight (lbs)
				Copper Wire or Bar	Aluminum Wire or Bar	Soft Steel Bolts	Reinforcing Bar	Bare Copper Wire Strands	Bare Aluminum Wire Strands 6x7	ACSR Wire Strands	Guy Steel Wire Strands 1x7	Guy Steel Wire Strands 1x19	Telephone Cable CPP	Underground Cable (Power)	
4	<b>WMC-580</b>	15.00	.63	.63	.63	.63	.38	.63	.63	.63	.56	.56	☆	.63	8
4	<b>WMC-750</b>	15.00	.63	.69	.69	.69	.50***	.75	.75	.75	.56	.56	☆	.68	8
20	<b>WMC-1000*</b>	26.75	☆	.75	.75	.75	.75	☆	☆	☆	☆	☆	☆	☆	25
20	<b>WMC-1250</b>	26.75	1.25	1.13	1.25	1.25	.88	1.25	1.25	1.25	.88	1.00	☆	☆	23
6	<b>WMC-1580</b>	22.00	.75	.75	.75	.75	☆	1.50	1.63	1.63	.63	.63	☆	1.63	15
13	<b>WMC-2000</b>	24.75	1.00	1.25	1.25	.88	☆	2.00	2.00	2.00	.75	.75	☆	2.00	24
3	<b>WMC-3380</b>	26.00	☆	☆	☆	☆	☆	1.83	1.69	☆	☆	☆	3.37	3.38	22

\* Cuts .50" alloy chain grade 70 (type G7 transport or tie-down) or grade 80 (for overhead lifting applications)

☆ Will not cut designated material

\*\*\* Low Alloy

▼ Shown: **STB-101H**



## Quick, Safe and Wrinkle-free Bending




### 'One Shot' and 'Sweep'

One shot shoes give up to a 90° bend without resetting.




Sweep shoes are used where increased radii are required for multiple parallel pipe installations.

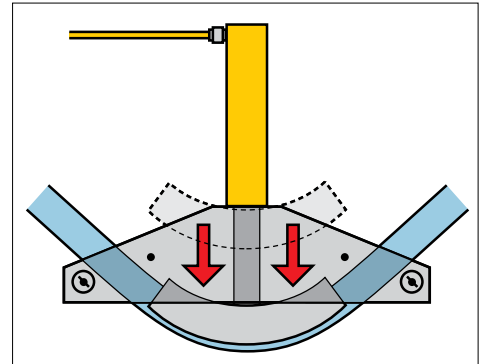- Makes smooth, wrinkle-free bends
- Sets include cylinder, hose and manual, air or electric pump
- Sets are also available without hydraulics
- Bending shoes and bending frame are lightweight, heat-treated aluminum
- All sets include sturdy steel storage case
- All sets include BZ-12091 angle indicator for accurate bending
- BZ-12377 Shoe Lock Pin included in every set
- Eject-O-Matic™ benders (STB-202 models) use a double-acting cylinder to eject pipe from the bending shoe



▲ Typical one shot bending operation.

### ▼ SELECTION CHART

Pipe Range		Set Model Number	Hand Pump*	Air Pump*	Electric Pump*	Cylinder*	Hose*	Steel Case*	Saddle	Weight (includes steel case)
One Shot	Sweep									
1/2 - 2	-	STB-101X	-	-	-	-	-	CM-4	A-12	88
		STB-101N	-	-	-	RC-1010	HC-7206	CM-4	A-12	105
		STB-101H	P-392	-	-	RC-1010	HC-7206	CM-4	A-12	114
		STB-101A	-	PATG-1102N	-	RC-1010	HC-7206	CM-4	A-12	119
		STB-101B	-	-	PUJ-1200B <sup>2)</sup>	RC-1010	HC-7206	CM-4	A-12	127
1 - 2	2 1/2 - 4	STB-221X	-	-	-	-	-	CM-7	A-29	229
		STB-221N	-	-	-	RC-2510	HC-7206	CM-7	A-29	263
		STB-221H	P-80	-	-	RC-2510	HC-7206	CM-7	A-29	286
1 1/4 - 4	-	STB-202X <sup>1)</sup>	-	-	-	-	-	CM-7	A-29	316
		STB-202N <sup>1)</sup>	-	-	-	RR-3014	HC-7206 (2x)	CM-7	A-29	383
		STB-202B <sup>1)</sup>	-	-	ZU4408SB <sup>2)</sup>	RR-3014	HC-7206 (2x)	CM-7	A-29	467

\* See corresponding sections of this catalog for more detailed specifications.

<sup>1)</sup> Eject-O-Matic™ <sup>2)</sup> For 230 volt applications change the last digit of Set Model Number from "B" to "E".



# Pipe Bender Sets

Nominal pipe size (outside dia.) (in)	Wall Thickness (in)	Schedule Pipe *	Pipe Bend Inside Radius (in)	STB-101	STB-221	STB-202	One Shot Bending Shoe Model Number	Sweep Bending Shoe Model Number
				1/2 - 2 One Shot	1-2 One Shot 2 1/2 - 4 Sweep	1 1/4 - 4 One Shot		
1/2 (.840)	.109	40	2 3/8	Yes	-	-	BZ-12011	-
	.147	80		Yes	-	-		
	.187	160		WS	-	-		
	.294	DEH		WS	-	-		
3/4 (1.050)	.113	40	4	Yes	-	-	BZ-12021	-
	.154	80		Yes	-	-		
	.218	160		WS	-	-		
	.308	DEH		WS	-	-		
1 (1.315)	.133	40	5 1/8	Yes	Yes	-	BZ-12031	-
	.179	80		Yes	Yes	-		
	.250	160		WS	WS	-		
	.358	DEH		-	WS	-		
1 1/4 (1.660)	.140	40	6 3/8	Yes	Yes	Yes	BZ-12041	-
	.191	80		Yes	Yes	Yes		
	.250	160		WS	WS	Yes		
	.342	DEH		-	WS	WS		
1 1/2 (1.900)	.145	40	7 1/8	Yes	Yes	Yes	BZ-12051	-
	.200	80		Yes	Yes	Yes		
	.281	160		WS	WS	Yes		
	.400	DEH		-	WS	WS		
2 (2.375)	.154	40	8 3/8	Yes	Yes	Yes	BZ-12061	-
	.218	80		-	Yes	Yes		
	.343	160		-	WS	Yes		
2 1/2 (2.875)	.203	40	9 1/2	-	Yes	Yes	BZ-12341	BZ-12382
	.276	80		-	WS	Yes		
	.375	160		-	WS	Yes		
3 (3.500)	.216	40	11 1/4	-	Yes	Yes	BZ-12351	BZ-12383
	.300	80		-	WS	Yes		
3 1/2 (4.000)	.226	40	15 1/2	-	Yes	Yes	BZ-12391	BZ-12384
	.318	80		-	WS	Yes		
4 (4.500)	.237	40	17 3/4	-	Yes	Yes	BZ-12392	BZ-12385
	.337	80		-	-	Yes		

\*Schedule Pipe: 40 = Standard; 80 = Extra Heavy; 160 = Double Extra Heavy;  
 DEH = Double Extra Heavy (slightly thicker than 160);  
 WS = Can be bent by using wider spacing for swivel shoes.

## STB Series



Nominal Pipe Size:

**0.5-4 inches**

Maximum Bend Angle:

**90°**

Maximum Operating Pressure:

**10,000 psi**



All bender sets are designed to bend mild steel pipe. For other material please consult Enerpac.

Frame Assembly	Pivot Pin (2x incl)	Pivot Shoes (2x incl)	One Shot or Sweep <sup>3)</sup> Bending Shoes included									Set Model Number	
BZ-12371	BZ-12375	BZ-12071	BZ-12011	BZ-12021	BZ-12031	BZ-12041	BZ-12051	BZ-12061	-	-	STB-101X		
												STB-101N	
													STB-101H
													STB-101A
													STB-101B
BZ-12372	BZ-12376	BZ-13401	BZ-12031	BZ-12041	BZ-12051	BZ-12061	BZ-12382 <sup>3)</sup>	BZ-12383 <sup>3)</sup>	BZ-12384 <sup>3)</sup>	BZ-12385 <sup>3)</sup>	STB-221X		
											STB-221N		
												STB-221H	
BZ-12374	BZ-12376	BZ-13401	-	BZ-12041	BZ-12051	BZ-12061	BZ-12341	BZ-12351	BZ-12391	BZ-12392	STB-202X <sup>1)</sup>		
												STB-202N <sup>1)</sup>	
													STB-202B <sup>1)</sup>

<sup>3)</sup> Shoes are Sweep, all other shoes are One Shot.

▼ Shown: PTJ5S and 5DA1



## Field-proven Tools for Mono-Strand Tensioning

- Durable, field-proven designs, with “soft-grip” ergonomic handles reduce operator fatigue
- Single-acting *PTJ* models, with spring-seating and optional power-seating are equipped with the new Enerpac *RC* Post-tensioning cylinders with a 10" stroke, ideal for slab-on-grade applications
- Double-acting *DA* models have an 8.5" stroke and are machined from a steel billet; feature standard power-seating and “gun-drilled” internal hydraulic passages
- All jacks have a standard 3" nose assembly. Longer nose assemblies are available as accessories for all models
- A full line of grippers is available to tension common strand diameters
- Complete offering of Enerpac parts and soft kits allow quick and easy service



### SCJ Short Cable Jack

For pulling applications where the tendons are shortened, the SCJ Jack only requires 4" of exposed cable.

Uses standard 10" stroke single-acting cylinders, other strokes available upon request.

Contact Enerpac for details.



### RC-1010PT and RC-1510PT Cylinders

Longer spring life and improved retraction are the benefits from these specially designed cylinders.



### 5DA1-AL Reduced Weight Jack

With a 17% weight reduction, this jack increases operator safety by reducing fatigue, while still having all the durability of a SURE-LOCK® product.



### ▼ TOOL SELECTION CHART

Tool Capacity (ton)	Seater Type	Strand Diameter Standard (in)	Model Number	Tool Operation	Stroke (in)	Oil Capacity (in <sup>3</sup> )	Tool Effective Area (in <sup>2</sup> )	Max. Pressure (psi)	Weight (lbs)
20	Spring	0.50-0.52	PTJ5S	S/A	10.0	45.3	4.48	10,000	55
20	Power	0.50-0.52	PTJ5P	S/A	10.0	45.3	4.48	10,000	55
20	Power	0.50-0.52	5DA1-AL	D/A	8.50	53.0	6.28	6,500	35
20	Power	0.50-0.52	5DA1	D/A	8.50	53.0	6.28	6,500	42
30	Spring	0.60-0.62	PTJ6S	S/A	10.0	62.8	6.28	10,000	76
30	Power	0.60-0.62	PTJ6P	S/A	10.0	62.8	6.28	10,000	76
26	Power	0.60-0.62	6DA1	D/A	8.50	67.6	7.95	6,500	52

# Mono-Strand Stressing Tools


## Mono-Strand Tensioning Tool Operational Sequence

The sequence of operation of the double-acting 5DA1 tool is illustrated. Single-acting, spring-seat models are similar.

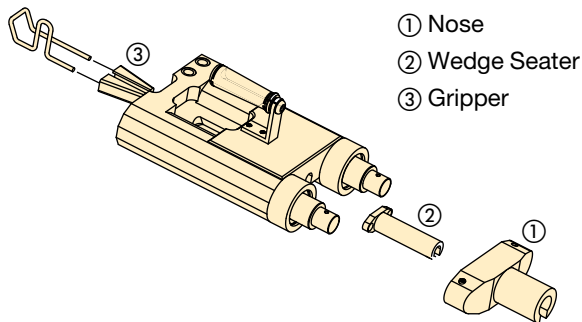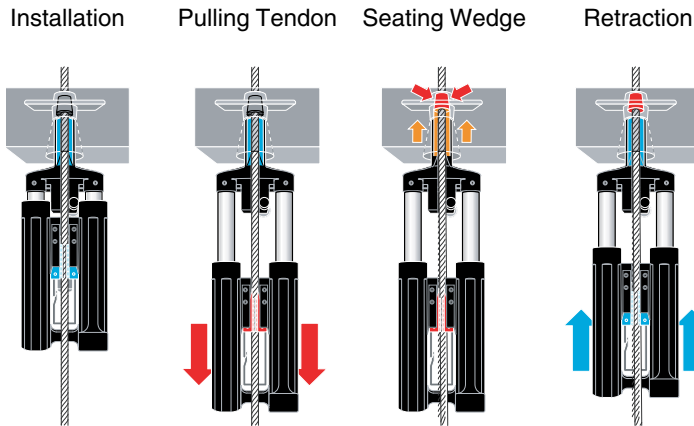

- ① Nose
- ② Wedge Seater
- ③ Gripper

Dimensions (in)			
Model No.	A	B	C
PTJ5	21.0	9.0	6.5
PTJ6	22.0	10.2	7.0
5DA1	18.5	7.5	6.5
6DA1	18.5	8.5	6.5



3/8" NPTF ports; PTJ and DA power seat models include FZ-1055 fitting.

## DA, PTJ Series



Capacity:

**20-30 tons**

Stroke:

**8.5-10 inches**

Strand Diameters:

**.375-.60 inch**


Maximum Operating Pressure:

**6,500-10,000 psi**



## Multi-Strand Stressing Jacks

For applications requiring multi-strand stressing, contact Enerpac *Integrated-Solutions* for information on Enerpac's multi-strand tensioning jacks.



## Jack Feet

Two required per jack. Used in place of a nose to react on either side of wedge pocket.

Model Number	Used with Jack
402000	5DA1
403325	6DA1

## ▼ Optional and Replacement Accessories Selection Chart

Nose		Wedge Seater		Gripper Set Diameter							
3"	6"	3"	6"	0.38"	0.43"	0.50"	0.62"	4 mm	5 mm	6 mm	7 mm
400740*	401180	305340*	401200	400900	400880	400850*	N/A	400930	400940	400950	400960
400740*	401180	305340*	401200	400900	400880	400850*	N/A	400930	400940	400950	400960
401520*	401840	305360*	305365	401652	401655	401660*	N/A	-	401670	-	-
401520*	401840	305360*	305365	401652	401655	401660*	N/A	-	401670	-	-
400740*	401180	305340*	401200	400900	400880	400850	400980*	400930	400940	400950	400960
400740*	401180	305340*	401200	400900	400880	400850	400980*	400930	400940	400950	400960
403180*	403220	403140*	403165	400988	N/A	400986	400990*	-	-	-	-

\*Shipped with tool.

**E**NERPAC'S *Bolting Solutions* caters to the complete bolting work-flow, ensuring joint integrity in a variety of applications throughout industry:

### Joint Assembly

From simple pipe alignment to complex joint positioning of large structural assemblies, our comprehensive line of joint assembly products range from hydraulic to mechanical alignment tools.

### Controlled Tightening

Enerpac offers a variety of controlled tightening options to best meet the requirements of your application. From mechanical torque multipliers to hydraulically driven square drive wrenches, and low profile torque wrenches, we offer the products you need for accurate and simultaneous tightening of multiple bolts.

### Joint Separation

Enerpac also provides hydraulic nut splitters and a variety of mechanical and hydraulic spreading tools for joint separation during inspection, maintenance and decommissioning operations.

High quality bolting solutions from the brand you can trust. See how Enerpac can make your bolting work-flow more accurate, safer and efficient.















### **Bolting Integrity Software**

Visit [www.enerpac.com](http://www.enerpac.com) to access our free on-line bolting software application and obtain information on tool selection, bolt load calculations and tool pressure settings. A combined application data sheet and joint completion report is also available.



# Bolting Tools and Pumps Section Overview

	Capacity	Tool Type and Functions	Series		Page
<b>Controlled Tightening and Loosening</b>	750-8000 Ft.lbs	Manual Torque Multipliers	E		188 ▶
	1400-25,140 Ft.lbs	Square Drive Hydraulic Torque Wrenches-Steel	S		190 ▶
	2000-15,000 Ft.lbs	Low Profile Hydraulic Torque Wrenches-Steel	W		196 ▶
	Flow 20 in <sup>3</sup> /min.	Portable Electric Torque Wrench Pumps	PMU		205 ▶
	Flow 60 in <sup>3</sup> /min.	Electric Torque Wrench Pumps	ZU4T		206 ▶
	Flow 60 in <sup>3</sup> /min.	Electric Torque Wrench Pumps	ZE		210 ▶
	Flow 20 in <sup>3</sup> /min.	Compact Air Driven Torque Wrench Pumps	PTA		212 ▶
	Flow 60 in <sup>3</sup> /min.	Air Driven Torque Wrench Pumps	ZA4T		214 ▶
<b>Joint Assembly</b>	0.3-5.5 tons	Flange Alignment Tools	ATM		218 ▶
<b>Joint Separation</b>	8-14 tons	Step-type Industrial Spreader	FSM FSH		219 ▶
	5-10 tons	Pin-type Hydraulic Flange Spreaders	FS		220 ▶
	5-192 tons	Hydraulic Nut Cutters	NC NS		221 ▶

▼ Shown from left to right: E291, E393, E494



## Accurate, Efficient Torque Multiplication

When accurate make-up or break-out of stubborn fasteners requires high torque

- High-efficiency planetary gear sets achieve high output torque from low input torque
- Most models operator protected by anti-backlash device
- Multiplier output accuracy  $\pm 5\%$  of input torque
- Reversible, tighten or loosen bolts
- Reaction bar or reaction plate type
- Angle-of-turn protractor standard on E300 series models
- Reaction plate models offer increased versatility with reaction point locations
- E300 and E400 series replaceable shear drives provide overload protection of internal power train (one replacement shear drive is included)



### Typical Torque Multiplier Applications

- Locomotives
- Power plants
- Pulp and paper mills
- Refineries
- Chemical plants
- Mining and construction
- Off-road equipment
- Shipyards
- Cranes



### MTW-250 Manual Torque Wrench

Available to power manual torque multipliers.

Technical information:

- 1/2" Square Drive
- 45-250 Ft-lbs. (60-330 Nm)

### ▼ SELECTION CHART

Torque Multiplier Type	Output Torque Capacity		Model Number
	(Ft.lbs)	(Nm)	
Reaction Bar Multiplier	750	1015	<b>E290PLUS</b>
	1000	1355	<b>E291</b>
	1200	1625	<b>E391</b>
	2200	2980	<b>E392</b>
	3200	4340	<b>E393</b>
Reaction Plate Multiplier	2200	2980	<b>E492</b>
	3200	4340	<b>E493</b>
	5000	6780	<b>E494</b>
	8000	10.845	<b>E495</b>



◀ Enerpac Reaction Bar Torque Multiplier E393 used to manually torque bolts up to 3,200 ft-lbs.

# Manual Torque Multipliers



## Manual Torque Multipliers

Enerpac manual torque multipliers provide efficient

torque multiplication in wide clearance applications and when external power sources are not available.

Manual torque multipliers are used in most industrial, construction, and equipment maintenance applications. Hydraulic torque wrenches are better suited for tight tolerance, flange and repetitious bolting applications.

### Use Reaction Bar Models:

- where space is limited
- where multiple reaction points are available
- when portability is desirable

### Use Reaction Plate Models:

- above 3200 Ft.-lbs. output torque
- on flanges and applications where neighboring bolt or nut is available to react against
- when extreme reaction forces are generated


## E Series



Maximum Output Torque:  
**750-8000 Ft.lbs**


Torque Ratio:  
**3:1-52:1**

Multiplier Output Ratio Accuracy:  
**± 5 %**




### Selector Pawl

Models with anti-backlash protection have directional selector pawls. Set the pawl for clockwise or counter-clockwise rotation.



### Angle-of-Turn Protractor

E391, E392 and E393 models include an angle-of-turn protractor (scale) to tighten fasteners using a "torque turn" method. Allows accurate measuring a specific number of degrees of rotation.




### Shearable Square Drive

Provides overload protection on E300- and E400-series multiplier's power train by shearing at 103-110% of rated capacity. Internal shear pin prevents tool from falling off bolt.




### CAUTION!

Never use impact type air tools for power driving torque multipliers. Torque multiplier drive train damage will occur.

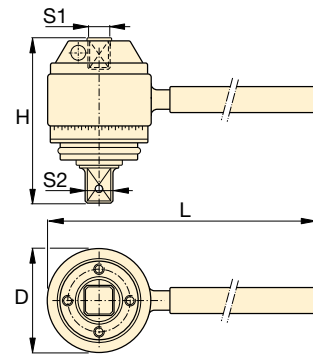

Reaction Bar Type <sup>1)</sup>

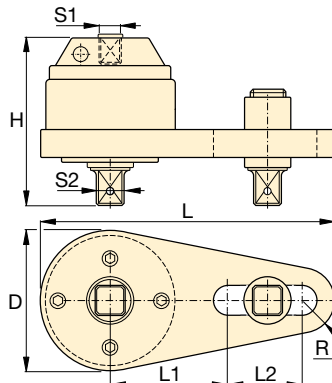

Reaction Plate Type <sup>1)</sup>



### Hydraulic Torque Wrenches

Enerpac offers a complete range of square drive and hexagon cassette torque wrenches.

Page: 190

Input Torque		Torque Ratio	Input Female Square Drive	Output Male Square Drive		Over-load Protection	Anti-Back-lash	Dimensions (in)						Wt. (lbs)	Model Number
(Ft.lbs)	(Nm)			S1 (in)	S2 (in)			Replaceable Shear Drive Model No.	D	H	L	L1	L2		
227	308	3 : 1	1/2	3/4	-	No	No	2.8	3.3	8.6	-	-	-	4.0	E290PLUS
303	411	3 : 1	1/2	3/4	-	No	No	2.8	3.3	17.4	-	-	-	5.5	E291
200	271	6 : 1	1/2	3/4	E391SDK	Yes	No	3.9	4.0	19.6	-	-	-	9.1	E391
162	219	13.6 : 1	1/2	1	E392SDK	Yes	Yes	4.1	5.7	19.6	-	-	-	18.3	E392
173	234	18.5 : 1	1/2	1	E393SDK	Yes	Yes	4.1	6.5	19.6	-	-	-	15.2	E393
162	219	13.6 : 1	1/2	1	E392SDK	Yes	Yes	4.9	5.5	14.0	5.5	4.9	1.3	17.2	E492
173	234	18.5 : 1	1/2	1	E393SDK	Yes	Yes	4.9	6.4	14.0	5.5	4.9	1.3	19.5	E493
189	256	26.5 : 1	1/2	1 1/2	E494SDK	Yes	Yes	5.6	8.7	14.9	7.0	3.5	1.7	34.0	E494
154	208	52 : 1	1/2	1 1/2	E495SDK	Yes	Yes	5.8	10.7	15.2	7.0	3.5	1.9	50.3	E495

<sup>1)</sup> E200 and E400-series do not have an Angle-of-Turn Protractor (scale). User must verify manual torque wrench accuracy prior to use to ensure accurate final output torque.

▼ From left to right: S3000, S6000, S1500



## Rigid Steel Design

## The *Professional* Square Drive Solution



### S-Series, Square Drive Wrenches

This product range has been designed using state-of-the-art CAD techniques to bring you the most advanced square drive torque wrench on the market. To ensure that the tools you buy meet our own exacting requirements, during the design process every prototype was put through finite element stress analysis, photo-elastic modeling, rigorous cyclic testing and strain gauging.

### Simplicity

- 360° click-on, multi-position reaction arm
- Push button square drive release for quickly reversing the square drive for tightening or loosening
- Fine tooth ratchet prevents tool “lock-on”
- Single 360° hydraulic swivel manifold, complete with screw lock couplings, increases wrench and hose maneuverability

### Design

- Compact, high-strength uni-body construction for a small operating radius
- Robust design with minimal parts enables easy on-site maintenance without special tools
- Lightweight, ergonomic design for easy handling and an easy fit, even in applications where access is limited
- Optimised strength-to-weight ratio
- Fast operation due to the large nut rotation per wrench cycle (35 degree rotation angle) and rapid return stroke

### Reliability

- All wrenches are nickel-plated for excellent corrosion protection and improved durability in harsh environments

### Accuracy

- Constant torque output provides high accuracy across the full stroke
- Uni-body construction ensures accuracy by reducing internal deflections



### TSP - Pro Series Swivel

Featuring Tilt & Swivel technology the TSP provides 360° X-axis rotation and 160° Y-axis rotation.

#### How to Order

Order as an accessory which can be fitted to existing S-Series wrenches.

Factory fitted to new S-Series wrenches: Suffix the wrench model number with "-P" e.g.: **S1500-P**.

Page: 193




### Torque Wrench Hoses

Use Enerpac THQ-700 Series torque wrench hoses with S-Series torque wrenches to ensure the integrity of your hydraulic system.

19.5 feet long, 2 hoses	<b>THQ-706T</b>
39 feet long, 2 hoses	<b>THQ-712T</b>



# Double-Acting Square Drive Hydraulic Torque Wrenches

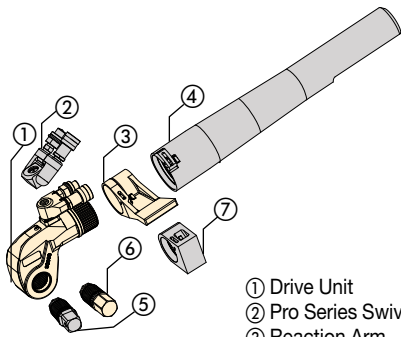

- ① Drive Unit
- ② Pro Series Swivel
- ③ Reaction Arm
- ④ Extended Reaction Arm
- ⑤ Square Drive
- ⑥ Allen Drive
- ⑦ Short Reaction Arm



## Select the Right Torque

Choose your Enerpac Torque Wrench using the untightening rule of thumb: Loosening torque equals about 250% of tightening torque.

## S Series




Maximum Torque at 10,000 psi:  
**25,140 Ft.lbs**

Square Drive Range:  
**3/4-2 1/2 inch**


Nose Radius:  
**.99-2.50 inch**

Maximum Operating Pressure:  
**10,000**

### \*TORQUE WRENCH SELECTION (based on socket size range)

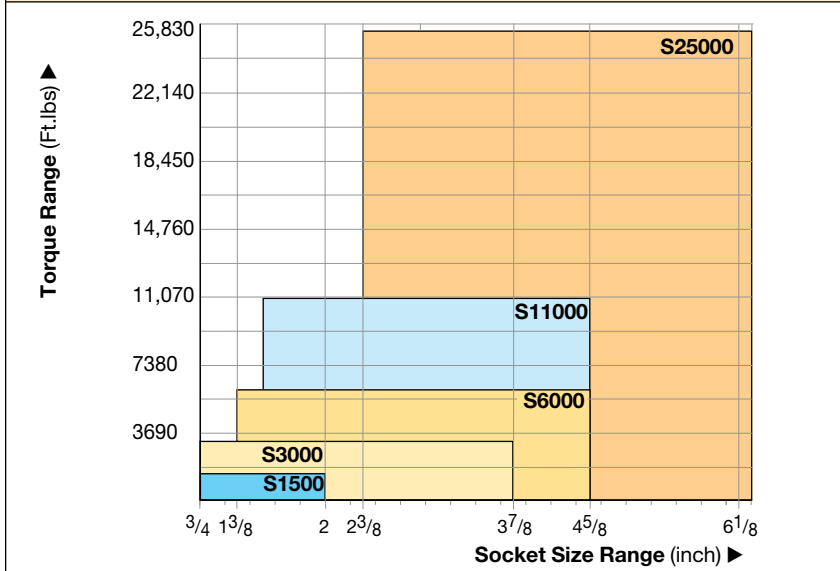

\*Additional socket sizes available upon request.

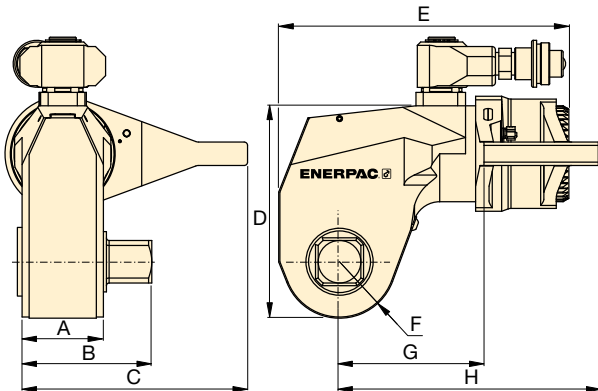

The rigid steel design of S-Series torque wrenches guarantee durability, reliability and safety. These wrenches can be powered by the portable ZU4T-Series pumps. ▶





### Torque Wrench and Pump Selection Matrix

For optimum speed and performance see the torque wrench and pump matrix.

Page: 204




Maximum Torque at 10,000 psi		Square Drive		Torque Wrench Model No.	Dimensions (in)								Weight (lbs)
		Size (in)	Model No. (included with wrench)		A	B	C	D	E	F	G	H	
(Ft.lbs)	(Nm)				A	B	C	D	E	F	G	H	
1400	1898	3/4"	SD15-012	<b>S1500</b>	1.54	2.48	4.33	3.74	5.36	0.99	2.72	4.69	5.94
3200	4339	1"	SD30-100	<b>S3000</b>	1.89	3.03	5.28	4.96	6.78	1.30	3.55	6.27	11.00
6010	8144	1 1/2"	SD60-108	<b>S6000</b>	2.24	3.55	7.05	6.38	7.92	1.66	4.41	7.37	18.70
11,000	14,914	1 1/2"	SD110-108	<b>S11000</b>	2.80	4.37	7.22	7.29	8.90	1.95	5.20	8.94	33.00
25,140	34,079	2 1/2"	SD250-208	<b>S25000</b>	3.43	5.63	9.61	9.46	11.50	2.50	7.17	11.50	68.20

See "Yellow Pages" section for torque conversions.

To order a S-series wrench fitted with the TSP swivel, suffix the model number with "-P". e.g., S1500-P.

# SDA-Series, Allen Drives



- ① Drive Unit
- ② Pro Series Swivel
- ③ Reaction Arm
- ④ Extended Reaction Arm
- ⑤ Square Drive
- ⑥ Allen Drive
- ⑦ Short Reaction Arm

Maximum Torque at 10,000 psi:

**25,140 Ft.lbs.**

Square Drive Range:

**3/4-2 1/2 inches**



Hexagon Size Allen Drive:

**14-85 mm**

For  
**S**  
Series




▼ SELECTION CHART

TORQUE WRENCH	OPTIONAL ALLEN DRIVES, IMPERIAL				OPTIONAL ALLEN DRIVES, METRIC				SHORT REACTION ARM FOR ALLEN DRIVES		
	Hexagon Size (in)	Maximum Torque (Ft.Lbs)	Model Number	Dim. B1 (in)	Hexagon Size (mm)	Maximum Torque (Ft.lbs)	Model Number	Dim. B1 (in)	Model Number	Dimensions (in) C1 H1	
 <b>S1500</b> (1400 Ft-lbs)	1/2	355	SDA15-008	2.6	14	475	SDA15-14	2.60	 <b>SRA15</b>	2.66	2.56
	5/8	690	SDA15-010	2.6	17	850	SDA15-17	2.68			
	3/4	1195	SDA15-012	2.8	19	1184	SDA15-19	2.76			
	7/8	1400	SDA15-014	2.9	22	1399	SDA15-22	2.87			
	1	1400	SDA15-100	3.0	24	1399	SDA15-24	2.91			
<b>S3000</b> (3200 Ft-lbs)	5/8	690	SDA30-010	3.0	17	850	SDA30-17	3.03	<b>SRA30</b>	3.15	2.91
	3/4	1195	SDA30-012	3.1	19	1185	SDA30-19	3.11			
	7/8	1895	SDA30-014	3.3	22	1835	SDA30-22	3.23			
	1	2825	SDA30-100	3.4	24	2385	SDA30-24	3.31			
	1 1/8	3200	SDA30-102	3.5	27	3200	SDA30-27	3.35			
	1 1/4	3200	SDA30-104	3.5	30	3200	SDA30-30	3.43			
	-	-	-	-	32	3200	SDA30-32	3.46			
<b>S6000</b> (6000 Ft-lbs)	5/8	690	SDA60-010	3.3	17	850	SDA60-17	3.39	<b>SRA60</b>	3.60	3.50
	3/4	1195	SDA60-012	3.5	19	1185	SDA60-19	3.46			
	7/8	1895	SDA60-014	3.6	22	1835	SDA60-22	3.58			
	1	2825	SDA60-100	3.7	24	2385	SDA60-24	3.66			
	1 1/8	4025	SDA60-102	3.8	27	3395	SDA60-27	3.70			
	1 1/4	5520	SDA60-104	3.9	30	4655	SDA60-30	3.78			
	-	-	-	-	32	5650	SDA60-32	3.82			
<b>S11000</b> (11,000 Ft-lbs)	1 1/4	5520	SDA110-104	4.5	30	4655	SDA110-30	4.41	<b>SRA110</b>	5.02	4.17
	1 3/8	7345	SDA110-106	4.6	32	5650	SDA110-32	4.49			
	1 1/2	9535	SDA110-108	4.6	36	8040	SDA110-36	4.61			
	1 5/8	11,000	SDA110-110	4.8	41	11,000	SDA110-41	4.76			
	1 3/4	11,000	SDA110-112	4.9	46	11,000	SDA110-46	5.00			
<b>S25000</b> (25,000 Ft-lbs)	1 1/2	9535	SDA250-108	5.5	36	8040	SDA250-36	5.51	<b>SRA250</b>	6.24	5.31
	1 5/8	12,120	SDA250-110	5.7	41	11880	SDA250-41	5.67			
	1 3/4	15,135	SDA250-112	5.8	46	16775	SDA250-46	5.83			
	1 7/8	18,620	SDA250-114	5.9	50	21,545	SDA250-50	5.94			
	2	22,595	SDA250-200	5.9	55	25,150	SDA250-55	6.06			
	2 1/4	25,150	SDA250-204	6.0	60	25,150	SDA250-60	6.22			
	-	-	-	-	65	25,150	SDA250-65	6.34			
	-	-	-	-	70	25,150	SDA250-70	6.46			
	-	-	-	-	75	25,150	SDA250-75	6.61			
	-	-	-	-	85	25,150	SDA250-85	6.89			

## TSP Series

- Pro Series Swivel featuring Tilt and Swivel technology
- 360 degree X-axis and 160 degree Y-axis rotation
- 10,000 psi / 700 bar maximum working pressure
- Increases tool fit in restricted access areas
- Simplifies hose placement




Wrench Model	Model Number	Dimensions (in)				Weight (lbs)
		A	B	C	D	
S1500, S3000	<b>TSP100</b>	2.52	1.06	.91	1.60	.41
S6000, S11000, S25000	<b>TSP200</b>	2.64	1.06	1.02	1.65	.43

To order a S-series wrench fitted with the TSP swivel, suffix the model number with "-P". e.g., **S1500-P**.

## RTE Series


- Reaction Tube Extension for S-Series Wrenches
- Full torque rated
- Increases tool fit in restricted access areas

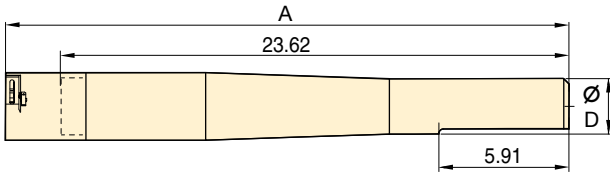


Wrench Model	Model Number	Dimensions (in)		Weight (lbs)
		A	D	
S1500	<b>RTE15</b>	25.00	2.28	10.19
S3000	<b>RTE30</b>	25.47	2.24	12.15
S6000	<b>RTE60</b>	25.95	2.56	17.00
S11000	<b>RTE110</b>	26.58	2.99	24.71
S25000	<b>RTE250</b>	26.98	3.94	38.12

## SRS Series

- Extended Reaction Arms
- Lightweight interchangeable design
- Can be used with Long Reach Sockets

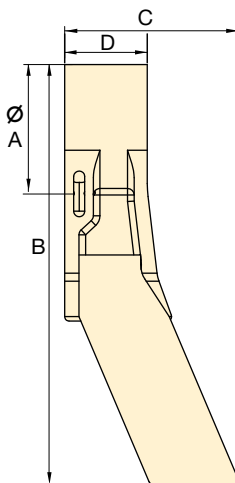

Wrench Model	Model Number	Dimensions (in)				Max. Torque (Ft-lbs)	Weight (lbs)
		A	B	C	D		
S1500	<b>SRS151</b>	2.24	5.59	1.45	1.48	1328	1.2
	<b>SRS152</b>		6.59			1210	1.5
	<b>SRS153</b>		7.59			1131	1.9
S3000	<b>SRS301</b>	2.57	6.61	2.89	1.89	2890	2.4
	<b>SRS302</b>		7.61			2738	2.9
	<b>SRS303</b>		8.61			2636	3.4
S6000	<b>SRS601</b>	3.11	8.07	3.91	2.30	5784	4.2
	<b>SRS602</b>		9.07			5498	4.9
	<b>SRS603</b>		10.07			5292	5.5
S11000	<b>SRS1101</b>	3.70	9.15	5.24	2.86	10805	7.5
	<b>SRS1102</b>		10.15			10294	8.7
	<b>SRS1103</b>		11.15			9877	9.8
S25000	<b>SRS2501</b>	4.84	11.30	5.82	3.44	24736	13.6
	<b>SRS2502</b>		12.30			23638	15.4
	<b>SRS2503</b>		13.30			22680	17.1



## BSH Series Sockets

- Heavy-duty impact sockets
- Supplied with "Pin and Ring"

IMPERIAL SOCKETS													
3/4" Square Drive		1" Square Drive				1 1/2" Square Drive				2 1/2" Square Drive			
Model Number	A/F (in)	Model Number	A/F (in)	Model Number	A/F (in)	Model Number	A/F (in)	Model Number	A/F (in)	Model Number	A/F (in)	Model Number	A/F (in)
BSH7519	3/4"	BSH1019	3/4"	BSH10231	2 5/16"	BSH15144	1 7/16"	BSH15281	2 13/16"	BSH25244	2 7/16"	BSH25419	4 13/16"
BSH75088	7/8"	BSH10088	7/8"	BSH10238	2 3/8"	BSH1538	1 1/2"	BSH15288	2 7/8"	BSH25250	2 1/2"	BSH25425	4 1/4"
BSH75094	15/16"	BSH10094	15/16"	BSH10244	2 7/16"	BSH15156	1 9/16"	BSH1575	2 15/16"	BSH2565	2 9/16"	BSH25110	4 5/16"
BSH7527	1 1/16"	BSH1027	1 1/16"	BSH10250	2 1/2"	BSH15163	1 5/8"	BSH15300	3"	BSH25263	2 5/8"	BSH25438	4 3/8"
BSH7530	1 3/16"	BSH1030	1 3/16"	BSH1065	2 9/16"	BSH1543	1 11/16"	BSH15306	3 1/16"	BSH25269	2 11/16"	BSH25450	4 1/2"
BSH75125	1 1/4"	BSH10125	1 1/4"	BSH10263	2 5/8"	BSH15175	1 3/4"	BSH15313	3 1/8"	BSH2570	2 3/4"	BSH25463	4 5/8"
BSH75131	1 5/16"	BSH10131	1 5/16"	BSH10269	2 11/16"	BSH1546	1 13/16"	BSH15319	3 3/16"	BSH25281	2 13/16"	BSH25475	4 3/4"
BSH7535	1 3/8"	BSH1035	1 3/8"	BSH1070	2 3/4"	BSH15188	1 7/8"	BSH15325	3 1/4"	BSH25288	2 7/8"	BSH25488	4 7/8"
BSH75144	1 7/16"	BSH10144	1 7/16"	BSH10281	2 13/16"	BSH15194	1 15/16"	BSH15338	3 3/8"	BSH2575	2 15/16"	BSH25500	5"
BSH7538	1 1/2"	BSH1038	1 1/2"	BSH10288	2 7/8"	BSH15200	2"	BSH15350	3 1/2"	BSH25300	3"	BSH25513	5 1/8"
BSH75156	1 9/16"	BSH10156	1 9/16"	BSH1075	2 15/16"	BSH15206	2 1/16"	BSH15363	3 5/8"	BSH25306	3 1/16"	BSH25519	5 3/16"
BSH75163	1 5/8"	BSH10163	1 5/8"	BSH10300	3"	BSH15213	2 1/8"	BSH1595	3 3/4"	BSH25313	3 1/8"	BSH25525	5 1/4"
BSH7543	1 11/16"	BSH1043	1 11/16"	BSH10306	3 1/16"	BSH15219	2 3/16"	BSH15388	3 7/8"	BSH25319	3 3/16"	BSH25538	5 3/8"
BSH75175	1 3/4"	BSH10175	1 3/4"	BSH10313	3 1/8"	BSH15225	2 1/4"	BSH15100	3 15/16"	BSH25325	3 1/4"	BSH25140	5 1/2"
BSH7546	1 13/16"	BSH1046	1 13/16"	BSH10319	3 3/16"	BSH15231	2 5/16"	BSH15400	4"	BSH25338	3 3/8"	BSH25575	5 3/4"
BSH75188	1 7/8"	BSH10188	1 7/8"	BSH10325	3 1/4"	BSH15238	2 3/8"	BSH15105	4 1/8"	BSH25350	3 1/2"	BSH25150	5 7/8"
BSH75194	1 15/16"	BSH10194	1 15/16"	BSH10338	3 3/8"	BSH15244	2 7/16"	BSH15419	4 3/16"	BSH25363	3 5/8"	BSH25600	6"
BSH75200	2"	BSH10200	2"	BSH10350	3 1/2"	BSH15250	2 1/2"	BSH15425	4 1/4"	BSH2595	3 3/4"	BSH25613	6 1/8"
		BSH10206	2 1/16"	BSH10363	3 5/8"	BSH1565	2 9/16"	BSH15110	4 5/16"	BSH25388	3 7/8"		
		BSH10213	2 1/8"	BSH1095	3 3/4"	BSH15263	2 5/8"	BSH15438	4 3/8"	BSH25100	3 15/16"		
		BSH10219	2 3/16"	BSH10388	3 7/8"	BSH15269	2 11/16"	BSH15450	4 1/2"	BSH25400	4"		
		BSH10225	2 1/4"			BSH1570	2 3/4"	BSH15463	4 5/8"	BSH25105	4 1/8"		

METRIC SOCKETS							
3/4" Square Drive		1" Square Drive		1 1/2" Square Drive		2 1/2" Square Drive	
Model Number	A/F (mm)	Model Number	A/F (mm)	Model Number	A/F (mm)	Model Number	A/F (mm)
BSH7519	19	BSH1019	19	BSH1536	36	BSH2565	65
BSH7524	24	BSH1024	24	BSH15163	41	BSH2570	70
BSH7527	27	BSH1027	27	BSH1546	46	BSH2575	75
BSH7530	30	BSH1030	30	BSH1550	50	BSH2580	80
BSH7532	32	BSH1032	32	BSH1555	55	BSH2585	85
BSH7536	36	BSH1036	36	BSH1560	60	BSH2590	90
BSH75163	41	BSH10163	41	BSH1565	65	BSH2595	95
BSH7546	46	BSH1046	46	BSH1570	70	BSH25100	100
BSH7550	50	BSH1050	50	BSH1575	75	BSH25105	105
		BSH1055	55	BSH1580	80	BSH25110	110
		BSH1060	60	BSH1585	85	BSH25115	115
		BSH1065	65	BSH1590	90	BSH25120	120
		BSH1070	70	BSH1595	95	BSH25125	125
		BSH1075	75	BSH15100	100	BSH25135	135
		BSH1080	80	BSH15105	105	BSH25140	140
		BSH1085	85	BSH15110	110	BSH25145	145
		BSH1090	90	BSH15115	115	BSH25150	150
		BSH1095	95			BSH25155	155
		BSH10100	100				



### Optional Allen Drives

Expanded versatility with a wide range of metric and imperial Allen drives.

Page: 192



### Pin and Ring

All sockets are supplied with a "Pin and Ring" to hold the socket in place on the square drive of the tool.



### Select the Right Torque

Choose your Enerpac Torque Wrench using the untightening rule of thumb: Loosening torque equals about 250% of tightening torque.

**E**NERPAC professional series steel torque wrenches provide reliable controlled tightening solutions across many industries.

### **S3000 Square Drive Torque Wrench on Wind Tower Assembly and Maintenance**

S3000 used to connect wind tower segments during assembly and maintenance. A robust but compact solution is required for bolt tightening on wind tower sections. Large numbers of fasteners require precise application of torque to ensure joint integrity is achieved and maintained.

The Enerpac S-Series wrench offers simple and reliable operation while providing accurate and repeatable results.



### **W4000 Low Profile Torque Wrench on an ANSI Pipe Flange**

Throughout the Oil and Gas, Petrochemical and Processing Industries, pipeline joints, valves, pumps and machinery present challenges for controlled bolting.

The restricted access on this pipeline elbow was easily overcome with an Enerpac W-Series Torque Wrench. The W Wrenches offer reliability and control, ensuring even and consistent torque is applied to all bolts.

### **S6000 on a High Volume Pump Unit**

High vibration requires long studs to be accurately tightened to the calculated preload.

During maintenance, quick turnaround times are essential; S Series wrenches provide a large angle of nut rotation per stroke, offering speed and accuracy in a compact ergonomic tool.



▼ Shown: Drive units with interchangeable cassettes



## Rigid Steel Design

## The *Professional* Low Profile Solution



### W-Series, Low Profile Torque Wrenches

This product range has been designed using state-of-the-art CAD techniques to bring you the most advanced low profile torque wrench on the market. Safety, quality, toughness and reliability are built in.

During the design process every prototype was put through finite element stress analysis, photo-elastic modelling, rigorous cyclic testing and strain gauging.

### Simplicity

- No tools are needed for changing the hexagon cassettes
- Innovative, pinless wrench construction incorporates quick release cylinder and automatic crank engagement
- Single 360° hydraulic swivel manifold complete with screw lock couplings increases wrench and hose maneuverability

### Design

- Cylinders and low profile cassettes have been engineered to give ultra slim, compact low clearance tooling with a small nose radius
- Robust design with minimal parts enables easy on-site maintenance without special tools
- Nut sizes covered range from 1 1/8 - 4 5/8 inch (30 - 115 mm)
- Optimized strength-to-weight ratio
- Fast operation due to the large nut rotation per wrench cycle (30 degree rotation angle) and rapid return stroke

### Reliability

- All wrenches are nickel-plated for excellent corrosion protection and improved durability in harsh environments
- All wrenches are fitted with bronze bushings to ensure the ratchet will never seize in the sideplates, thus eliminating costly repairs

### Accuracy

- Constant torque output provides high accuracy across the full stroke
- In-line reaction foot ensures accuracy by reducing internal deflections



### TSP - Pro Series Swivel

Featuring Tilt and Swivel technology the TSP provides 360° X-axis rotation and 160° Y-axis rotation.

#### How to Order

Order as an accessory which can be fitted to existing W-Series wrenches.

Factory fitted to new W-Series wrenches: Suffix the wrench model number with "-P" e.g.: **W2000-P**.

Page: **203**




### Torque Wrench Hoses

Use Enerpac THQ-700 Series hoses with W-Series torque wrenches to ensure the integrity of your hydraulic system.

19.5 feet long, 2 hoses	<b>THQ-706T</b>
39 feet long, 2 hoses	<b>THQ-712T</b>

# Double-Acting Hydraulic Hexagon Torque Wrenches

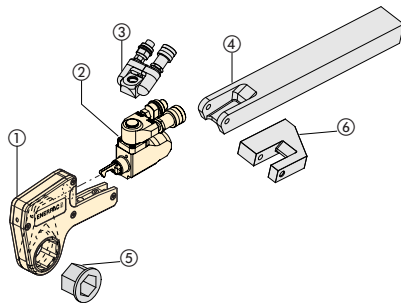

## Hexagon Cassettes and Reducer Inserts

Maximum versatility with the full range of interchangeable hexagon cassettes and hexagon reducing inserts is available in metric and inch sizes.

Page: 200

- ① Hexagon Cassette
- ② Drive Unit
- ③ Pro Series Swivel
- ④ Extended Reaction Arm
- ⑤ Reducer Insert
- ⑥ Reaction Paddle

## W Series




Maximum Torque at 10,000 psi:  
**15,000 Ft.lbs**

Hexagon Range:  
**1 1/8 - 4 5/8 inch**

Nose Radius:  
**1.22-3.44 inch**

Maximum Operating Pressure:  
**10,000 psi**

### DRIVE UNIT AND INTERCHANGEABLE CASSETTE SELECTION

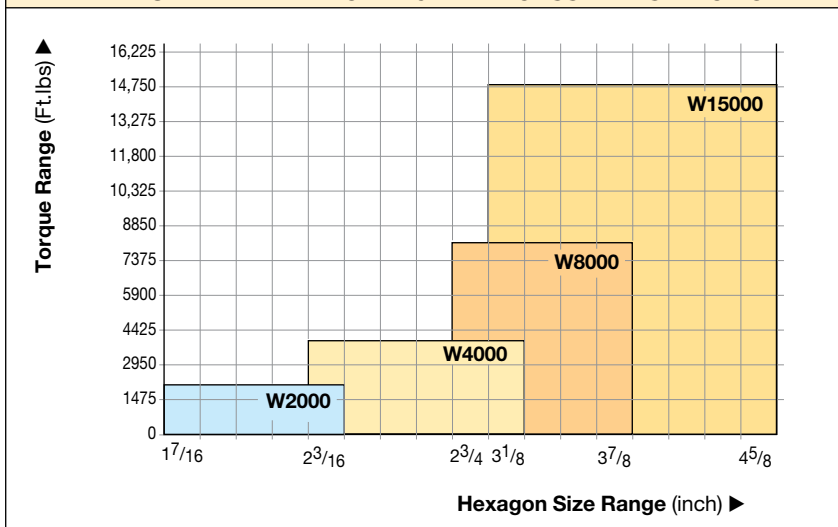


### Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench and pump matrix.

Page: 204

▼ These rigid steel wrenches with low profile interchangeable hexagon cassettes guarantee durability and maximum versatility in bolting applications.

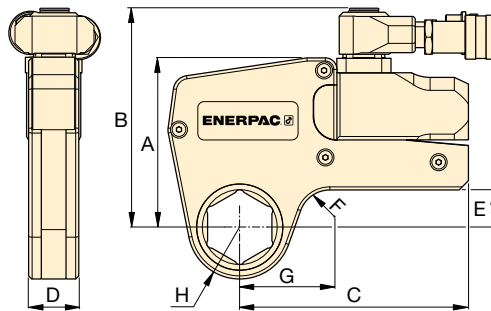


### ▼ SELECTION CHART

Hexagon Range *		Maximum Torque at 10,000 psi		Drive Unit Model Number **	Minimum Torque		Dimensions (in)						Weight Drive unit without hexagon cassette (lbs)
(in)	(mm)	(Ft.lbs)	(Nm)		(Ft.lbs)	(Nm)	A	B	C	D	E	F	
1 1/8 - 2 3/8	30 - 60	2000	2712	W2000	200	271	4.29	5.55	5.83	1.26	.94	.79	3.09
1 5/16 - 3 3/8	36 - 85	4000	5423	W4000	400	542	5.35	6.57	7.01	1.61	1.29	.79	4.41
1 7/8 - 4 1/8	50 - 105	8000	10,846	W8000	800	1084	6.77	8.07	8.19	2.07	1.65	.98	6.61
2 7/16 - 4 5/8	65 - 115	15,000	20,337	W15000	1500	2033	8.15	9.45	9.96	2.48	1.97	.79	11.02

\* With in-line reaction foot.

\*\* To order a W-series wrench fitted with the TSP swivel, suffix the model number with "-P". e.g., W2000-P.

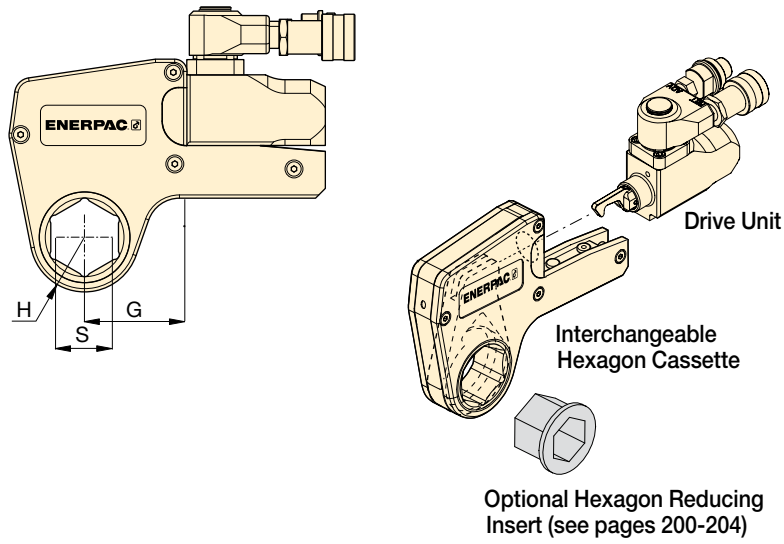

## W Series






Maximum Torque at 10,000 psi:  
**2000 Ft.lbs**

Hexagon Range:  
**1 1/8 - 2 3/8 inch**


Maximum Operating Pressure:  
**10,000 psi**

### ▼ SELECTION CHART

Drive Unit Model Number	Hexagon Size S (in)	Nose Radius H (in)	G (in)	Model Number	Weight (lbs)						
						Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number
<b>W2000</b>	1 1/8	1.22	2.11	<b>W2102</b>	0.95	-	-	-	-	-	-
	1 3/16	1.22	2.11	<b>W2103</b>	0.95	-	-	-	-	-	-
	1/4	1.22	2.11	<b>W2104</b>	0.95	-	-	-	-	-	-
	1 5/16	1.22	2.11	<b>W2105</b>	0.95	-	-	-	-	-	-
	1 3/8	1.22	2.11	<b>W2106</b>	0.95	-	-	-	-	-	-
	1 7/16	1.22	2.11	<b>W2107</b>	0.95	1 7/16 - 1 1/8	<b>W2107R102</b>	-	-	-	-
	1 1/2	1.32	2.29	<b>W2108</b>	0.99	-	-	-	-	-	-
	1 9/16	1.32	2.29	<b>W2109</b>	0.99	-	-	-	-	-	-
	1 5/8	1.32	2.29	<b>W2110</b>	0.99	1 5/8 - 1 1/4	<b>W2110R104</b>	1 5/8 - 1 3/16	<b>W2110R103</b>	-	-
	1 11/16	1.44	2.38	<b>W2111</b>	0.99	-	-	-	-	-	-
	1 3/4	1.44	2.38	<b>W2112</b>	0.99	-	-	-	-	-	-
	1 13/16	1.44	2.38	<b>W2113</b>	0.99	1 13/16 - 1 7/16	<b>W2113R107</b>	1 13/16 - 1 1/4	<b>W2113R104</b>	-	-
	1 7/8	1.54	2.48	<b>W2114</b>	0.99	-	-	-	-	-	-
	1 15/16	1.54	2.48	<b>W2115</b>	0.99	-	-	-	-	-	-
	2	1.54	2.48	<b>W2200</b>	0.99	2 - 1 5/8	<b>W2200R110</b>	2 - 1 7/16	<b>W2200R107</b>	-	-
	2 1/16	1.65	2.70	<b>W2201</b>	1.04	-	-	-	-	-	-
	2 1/8	1.65	2.70	<b>W2202</b>	1.04	-	-	-	-	-	-
	2 3/16	1.65	2.70	<b>W2203</b>	1.04	2 3/16 - 1 13/16	<b>W2203R113</b>	2 3/16 - 1 5/8	<b>W2203R110</b>	2 3/16 - 1 7/16	<b>W2203R107</b>
	-	-	-	-	-	-	-	-	-	-	-
	2 1/4	1.75	2.55	<b>W2204</b>	1.00	-	-	-	-	-	-
2 5/16	1.75	2.55	<b>W2205</b>	1.00	-	-	-	-	-	-	
2 3/8	1.75	2.55	<b>W2206</b>	1.00	2 3/8 - 2	<b>W2206R200</b>	2 3/8 - 1 7/8	<b>W2206R114</b>	2 3/8 - 1 13/16	<b>W2206R113</b>	
-	-	-	-	-	-	2 3/8 - 1 1/2	<b>W2206R108</b>	2 3/8 - 1 7/16	<b>W2206R107</b>	-	



# W4000 Series Imperial Cassettes & Reducer Inserts



Maximum Torque at 10,000 psi:

**4000 Ft.lbs**

Hexagon Range:

**1<sup>5</sup>/<sub>16</sub>-3<sup>3</sup>/<sub>8</sub> inch**

Maximum Operating Pressure:

**10,000 psi**


**W**  
Series



▼ SELECTION CHART

Drive Unit Model Number	Hexagon Size S	Nose Radius H	G	Model Number	Weight	Hexagon Reducer		Hexagon Reducer		Hexagon Reducer	
						(in)	Model Number	(in)	Model Number	(in)	Model Number
W4000	1 <sup>5</sup> / <sub>16</sub>	1.46	2.40	W4105	1.68	-	-	-	-	-	-
	1 <sup>3</sup> / <sub>8</sub>	1.46	2.40	W4106	1.68	-	-	-	-	-	-
	1 <sup>7</sup> / <sub>16</sub>	1.46	2.40	W4107	1.68	-	-	-	-	-	-
	1 <sup>1</sup> / <sub>2</sub>	1.46	2.40	W4108	1.68	-	-	-	-	-	-
	1 <sup>9</sup> / <sub>16</sub>	1.46	2.40	W4109	1.68	-	-	-	-	-	-
	1 <sup>5</sup> / <sub>8</sub>	1.46	2.40	W4110	1.68	-	-	-	-	-	-
	1 <sup>11</sup> / <sub>16</sub>	1.56	2.52	W4111	1.72	-	-	-	-	-	-
	1 <sup>3</sup> / <sub>4</sub>	1.56	2.52	W4112	1.72	-	-	-	-	-	-
	1 <sup>13</sup> / <sub>16</sub>	1.56	2.52	W4113	1.72	-	-	-	-	-	-
	1 <sup>7</sup> / <sub>8</sub>	1.63	2.63	W4114	1.77	-	-	-	-	-	-
	1 <sup>15</sup> / <sub>16</sub>	1.63	2.63	W4115	1.77	-	-	-	-	-	-
	2	1.63	2.63	W4200	1.77	2 - 1 <sup>7</sup> / <sub>8</sub>	W4200R107	-	-	-	-
	2 <sup>1</sup> / <sub>16</sub>	1.73	2.89	W4201	1.81	-	-	-	-	-	-
	2 <sup>1</sup> / <sub>8</sub>	1.73	2.89	W4202	1.81	-	-	-	-	-	-
	2 <sup>3</sup> / <sub>16</sub>	1.73	2.89	W4203	1.81	2 <sup>3</sup> / <sub>16</sub> - 1 <sup>5</sup> / <sub>8</sub>	W4203R110	2 <sup>3</sup> / <sub>16</sub> - 1 <sup>7</sup> / <sub>16</sub>	W4203R107	2 <sup>3</sup> / <sub>16</sub> - 1 <sup>1</sup> / <sub>4</sub>	W4203R104
	2 <sup>1</sup> / <sub>4</sub>	1.83	2.78	W4204	1.86	-	-	-	-	-	-
	2 <sup>5</sup> / <sub>16</sub>	1.83	2.78	W4205	1.86	-	-	-	-	-	-
	2 <sup>3</sup> / <sub>8</sub>	1.83	2.78	W4206	1.86	2 <sup>3</sup> / <sub>8</sub> - 2	W4206R200	2 <sup>3</sup> / <sub>8</sub> - 1 <sup>13</sup> / <sub>16</sub>	W4206R113	2 <sup>3</sup> / <sub>8</sub> - 1 <sup>7</sup> / <sub>16</sub>	W4206R107
	-	-	-	-	-	2 <sup>3</sup> / <sub>8</sub> - 1 <sup>3</sup> / <sub>8</sub>	R4206R106	-	-	-	-
	2 <sup>7</sup> / <sub>16</sub>	1.95	3.00	W4207	1.86	2 <sup>7</sup> / <sub>16</sub> - 2	W4207R200	-	-	-	-
	2 <sup>1</sup> / <sub>2</sub>	1.95	3.00	W4208	1.86	2 <sup>1</sup> / <sub>2</sub> - 2	W4208R200	2 <sup>1</sup> / <sub>2</sub> - 1 <sup>13</sup> / <sub>16</sub>	W4208R113	-	-
	2 <sup>9</sup> / <sub>16</sub>	1.95	3.00	W4209	1.86	2 <sup>9</sup> / <sub>16</sub> - 2 <sup>3</sup> / <sub>16</sub>	W4209R203	2 <sup>9</sup> / <sub>16</sub> - 2 <sup>1</sup> / <sub>8</sub>	W4209R202	2 <sup>9</sup> / <sub>16</sub> - 2 <sup>1</sup> / <sub>16</sub>	W4208R201
	-	-	-	-	-	2 <sup>9</sup> / <sub>16</sub> - 2	W4209R200	2 <sup>9</sup> / <sub>16</sub> - 2 <sup>13</sup> / <sub>16</sub>	W4209R113	-	-
	2 <sup>5</sup> / <sub>8</sub>	2.07	3.08	W4210	1.91	-	-	-	-	-	-
	2 <sup>11</sup> / <sub>16</sub>	2.07	3.08	W4211	1.91	-	-	-	-	-	-
	2 <sup>3</sup> / <sub>4</sub>	2.07	3.08	W4212	1.91	2 <sup>3</sup> / <sub>4</sub> - 2 <sup>3</sup> / <sub>8</sub>	W4212R206	2 <sup>3</sup> / <sub>4</sub> - 2 <sup>3</sup> / <sub>16</sub>	W4212R203	2 <sup>3</sup> / <sub>4</sub> - 2 <sup>1</sup> / <sub>8</sub>	W4212R202
	2 <sup>13</sup> / <sub>16</sub>	2.18	3.21	W4213	1.95	-	-	-	-	-	-
	2 <sup>7</sup> / <sub>8</sub>	2.18	3.21	W4214	1.95	-	-	-	-	-	-
	2 <sup>15</sup> / <sub>16</sub>	2.18	3.21	W4215	1.95	2 <sup>15</sup> / <sub>16</sub> - 2 <sup>9</sup> / <sub>16</sub>	W4215R209	2 <sup>15</sup> / <sub>16</sub> - 2 <sup>3</sup> / <sub>8</sub>	W4215R206	2 <sup>15</sup> / <sub>16</sub> - 2 <sup>9</sup> / <sub>16</sub>	W4215R203
	-	-	-	-	-	2 <sup>15</sup> / <sub>16</sub> - 2	W4215R200	-	-	-	-
	3	2.30	3.29	W4300	2.00	3 - 2 <sup>9</sup> / <sub>16</sub>	W4300R203	-	-	-	-
	3 <sup>1</sup> / <sub>16</sub>	2.30	3.29	W4301	2.00	-	-	-	-	-	-
3 <sup>1</sup> / <sub>8</sub>	2.30	3.29	W4302	2.00	3 <sup>1</sup> / <sub>8</sub> - 2 <sup>3</sup> / <sub>4</sub>	W4302R212	3 <sup>1</sup> / <sub>8</sub> - 2 <sup>9</sup> / <sub>16</sub>	W4302R209	3 <sup>1</sup> / <sub>8</sub> - 2 <sup>3</sup> / <sub>8</sub>	W4302R206	
-	-	-	-	-	3 <sup>1</sup> / <sub>8</sub> - 2 <sup>5</sup> / <sub>16</sub>	W4302R205	3 <sup>1</sup> / <sub>8</sub> - 2 <sup>1</sup> / <sub>4</sub>	W4302R204	3 <sup>1</sup> / <sub>8</sub> - 2 <sup>3</sup> / <sub>16</sub>	W4302R203	
-	-	-	-	-	3 <sup>1</sup> / <sub>8</sub> - 2 <sup>1</sup> / <sub>8</sub>	W4302R202	3 <sup>1</sup> / <sub>8</sub> - 2	W4302R200	-	-	
3 <sup>3</sup> / <sub>16</sub>	2.44	3.37	W4303	2.04	-	-	-	-	-	-	
3 <sup>1</sup> / <sub>4</sub>	2.44	3.37	W4304	2.04	-	-	-	-	-	-	
3 <sup>5</sup> / <sub>16</sub>	2.44	3.37	W4305	2.04	-	-	-	-	-	-	
3 <sup>3</sup> / <sub>8</sub>	2.44	3.37	W4306	2.04	-	-	-	-	-	-	

# W8000 Series Imperial Cassettes & Reducer Inserts



Maximum Torque at 10,000 psi:

**8000 Ft.lbs**

Hexagon Range:

**1 7/8 - 4 1/8 inch**

Maximum Operating Pressure:

**10,000 psi**


**W Series**



▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size S	Nose Radius H	G	Model Number	Weight	Hexagon Reducer		Hexagon Reducer		Hexagon Reducer	
						Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number
<b>W8000</b>	1 7/8	1.77	3.08	<b>W8114</b>	3.68	-	-	-	-	-	-
	1 15/16	1.77	3.08	<b>W8115</b>	3.68	-	-	-	-	-	-
	2	1.77	3.08	<b>W8200</b>	3.68	-	-	-	-	-	-
	2 1/16	1.89	3.15	<b>W8201</b>	3.68	-	-	-	-	-	-
	2 1/8	1.89	3.15	<b>W8202</b>	3.68	-	-	-	-	-	-
	2 3/16	1.89	3.15	<b>W8203</b>	3.68	-	-	-	-	-	-
	2 1/4	2.01	3.25	<b>W8204</b>	3.68	-	-	-	-	-	-
	2 5/16	2.01	3.25	<b>W8205</b>	3.68	-	-	-	-	-	-
	2 3/8	2.01	3.25	<b>W8206</b>	3.68	-	-	-	-	-	-
	2 7/16	2.07	3.38	<b>W8207</b>	3.68	-	-	-	-	-	-
	2 1/2	2.07	3.38	<b>W8208</b>	3.68	-	-	-	-	-	-
	2 9/16	2.07	3.38	<b>W8209</b>	3.68	2 9/16 - 2	<b>W8209R200</b>	-	-	-	-
	2 5/8	2.20	3.34	<b>W8210</b>	3.68	-	-	-	-	-	-
	2 11/16	2.20	3.34	<b>W8211</b>	3.58	-	-	-	-	-	-
	2 3/4	2.20	3.34	<b>W8212</b>	3.58	2 3/4 - 2 3/16	<b>W8212R203</b>	-	-	-	-
	2 13/16	2.28	3.35	<b>W8213</b>	3.58	-	-	-	-	-	-
	2 7/8	2.28	3.35	<b>W8214</b>	3.58	-	-	-	-	-	-
	2 15/16	2.28	3.35	<b>W8215</b>	3.58	2 15/16 - 2 3/8	<b>W8215R206</b>	2 15/16 - 2 3/8	<b>W8215R203</b>	-	-
	3	2.38	3.52	<b>W8300</b>	3.63	-	-	-	-	-	-
	3 1/16	2.38	3.52	<b>W8301</b>	3.63	-	-	-	-	-	-
	3 1/8	2.38	3.52	<b>W8302</b>	3.63	3 1/8 - 2 9/16	<b>W8302R209</b>	3 1/8 - 2 3/8	<b>W8302R206</b>	3 1/8 - 2 3/16	<b>W8302R203</b>
	-	-	-	-	-	-	3 1/8 - 2	<b>W8302R200</b>	-	-	-
	3 3/16	2.60	3.63	<b>W8303</b>	3.72	-	-	-	-	-	-
	3 1/4	2.60	3.63	<b>W8304</b>	3.72	-	-	-	-	-	-
	3 5/16	2.60	3.63	<b>W8305</b>	3.72	-	-	-	-	-	-
	3 3/8	2.60	3.63	<b>W8306</b>	3.72	-	-	-	-	-	-
	3 7/16	2.60	3.63	<b>W83071</b>	3.72	-	-	-	-	-	-
	3 1/2	2.60	3.63	<b>W8308</b>	3.72	3 1/2 - 3	<b>W8308R300</b>	3 1/2 - 2 15/16	<b>W8308R215</b>	3 1/2 - 2 3/4	<b>W8308R212</b>
	3 9/16	2.91	4.05	<b>W8309</b>	3.99	-	-	-	-	-	-
	3 5/8	2.91	4.05	<b>W8310</b>	3.99	-	-	-	-	-	-
	3 11/16	2.91	4.05	<b>W8311</b>	3.99	-	-	-	-	-	-
	3 3/4	2.91	4.05	<b>W8312</b>	3.99	3 3/4 - 3 1/8	<b>W8312R302</b>	3 3/4 - 2 15/16	<b>W8312R215</b>	3 3/4 - 2 3/4	<b>W8312R212</b>
3 13/16	2.91	4.05	<b>W8313</b>	3.99	-	-	-	-	-	-	
3 7/8	2.91	4.05	<b>W8314</b>	3.99	3 7/8 - 3 1/8	<b>W8314R302</b>	3 7/8 - 2 15/16	<b>W8314R215</b>	-	-	
3 15/16	3.13	4.33	<b>W8315</b>	4.22	-	-	-	-	-	-	
4	3.13	4.33	<b>W8400</b>	4.22	-	-	-	-	-	-	
4 1/16	3.13	4.33	<b>W84011</b>	4.22	-	-	-	-	-	-	
4 1/8	3.13	4.33	<b>W8402</b>	4.22	-	-	-	-	-	-	

# W15000 Series Imperial Cassettes & Reducer Inserts



Maximum Torque at 10,000 psi:

**15,000 Ft.lbs**

Hexagon Range:

**27/16-45/8 inch**

Maximum Operating Pressure:

**10,000 psi**


**W**  
Series



## ▼ SELECTION CHART

Drive Unit Model Number	Hexagon Size S (in)	Nose Radius H (in)	G (in)	Model Number	Weight (lbs)	Hexagon Reducer		Hexagon Reducer		Hexagon Reducer	
						Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number	Hexagon Reducer (in)	Model Number
W15000	27/16	2.32	3.49	W15207	6.17	-	-	-	-	-	-
	21/2	2.32	3.49	W15208	6.17	-	-	-	-	-	-
	29/16	2.32	3.49	W15209	6.17	-	-	-	-	-	-
	25/8	2.32	3.49	W15210	6.17	-	-	-	-	-	-
	211/16	2.32	3.49	W15211	6.17	-	-	-	-	-	-
	23/4	2.32	3.49	W15212	6.17	-	-	-	-	-	-
	213/16	2.44	3.56	W15213	6.22	-	-	-	-	-	-
	27/8	2.44	3.56	W15214	6.22	-	-	-	-	-	-
	215/16	2.44	3.56	W15215	6.22	-	-	-	-	-	-
	3	2.54	3.66	W15300	6.26	3 - 21/8	W15300R202	-	-	-	-
	31/16	2.54	3.66	W15301	6.26	-	-	-	-	-	-
	31/8	2.54	3.66	W15302	6.26	31/8 - 29/16	W15302R209	-	-	-	-
	33/16	2.74	3.80	W15303	6.40	-	-	-	-	-	-
	31/4	2.74	3.80	W15304	6.40	-	-	-	-	-	-
	35/16	2.74	3.80	W15305	6.40	-	-	-	-	-	-
	33/8	2.74	3.80	W15306	6.40	-	-	-	-	-	-
	37/16	2.74	3.80	W15307I	6.40	-	-	-	-	-	-
	31/2	2.74	3.80	W15308	6.40	31/2 - 215/16	W15308R215	31/2 - 23/4	W15308R212	-	-
	39/16	2.95	4.01	W15309	6.62	-	-	-	-	-	-
	35/8	2.95	4.01	W15310	6.62	-	-	-	-	-	-
	311/16	2.95	4.01	W15311	6.62	-	-	-	-	-	-
	33/4	2.95	4.01	W15312	6.62	33/4 - 31/8	W15312R302	33/4 - 215/16	W15312R215	-	-
	313/16	2.95	4.01	W15313	6.58	-	-	-	-	-	-
	37/8	2.95	4.01	W15314	6.58	37/8 - 31/8	W15314R302	37/8 - 215/16	W15314R215	-	-
	315/16	3.17	4.06	W15315	6.72	-	-	-	-	-	-
	4	3.17	4.06	W15400	6.72	-	-	-	-	-	-
	41/16	3.17	4.06	W15401I	6.72	-	-	-	-	-	-
	41/8	3.17	4.06	W15402	6.72	41/8 - 31/2	W15402R308	41/8 - 35/16	W15402R305	41/8 - 31/4	W15402R304
	43/16	3.17	4.06	W15403I	6.72	-	-	-	-	-	-
	41/4	3.17	4.06	W15404	6.72	41/4 - 31/2	W15404R308	41/4 - 31/8	W15404R302	-	-
	45/16	3.44	4.52	W15405	6.85	-	-	-	-	-	-
	43/8	3.44	4.52	W15406	6.85	-	-	-	-	-	-
47/16	3.44	4.52	W15407	6.85	-	-	-	-	-	-	
41/2	3.44	4.52	W15408I	6.85	-	-	-	-	-	-	
49/16	3.44	4.52	W15409I	6.85	-	-	-	-	-	-	
45/8	3.44	4.52	W15410I	6.85	45/8 - 315/16	W15410R315	45/8 - 37/8	W15410R314	45/8 - 33/4	W15410R312	
-	-	-	-	-	-	45/8 - 31/2	W15410R308	-	-	-	

# W Series Metric Cassettes and Reducer Inserts



Maximum Torque at 10,000 psi:

**8000 Ft.lbs**

Hexagon Range:

**30-115 mm**




Maximum Operating Pressure:

**10,000 psi (700 bar)**

**W Series**




▼ **SELECTION CHART**

Drive Unit Model Number	Hexagon Size S	Nose Radius H	G	Model Number	Weight (lbs)						
						Hexagon Reducer (mm)	Model Number	Hexagon Reducer (mm)	Model Number	Hexagon Reducer (mm)	Model Number
<b>W2000</b>	30	1.22	2.11	<b>W2103</b>	0.95	-	-	-	-	-	-
	32	1.22	2.11	<b>W2104</b>	0.95	-	-	-	-	-	-
	36	1.22	2.11	<b>W2107</b>	0.95	-	-	-	-	-	-
	38	1.32	2.29	<b>W2108</b>	1.00	-	-	-	-	-	-
	41	1.32	2.29	<b>W2110</b>	1.00	41 - 32	<b>W2110R104</b>	41 - 30	<b>W2110R103</b>	41 - 24	<b>W2110R024M</b>
	46	1.44	2.38	<b>W2113</b>	1.00	46 - 36	<b>W2113R107</b>	46 - 32	<b>W2113R104</b>	-	-
	50	1.54	2.48	<b>W2200</b>	1.00	50 - 41	<b>W2200R110</b>	50 - 36	<b>W2200R107</b>	-	-
	55	1.65	2.70	<b>W2203</b>	1.04	55 - 46	<b>W2203R113</b>	55 - 41	<b>W2203R110</b>	55 - 36	<b>W2203R107</b>
	60	1.75	2.55	<b>W2206</b>	1.00	60 - 50	<b>W2206R200</b>	60 - 46	<b>W2206R113</b>	60 - 41	<b>W2206R110</b>
-	-	-	-	-	-	60 - 36	<b>W2206R107</b>	-	-	-	-
<b>W4000</b>	36	1.46	2.40	<b>W4107</b>	1.68	-	-	-	-	-	-
	41	1.46	2.40	<b>W4110</b>	1.68	-	-	-	-	-	-
	46	1.56	2.52	<b>W4113</b>	1.72	-	-	-	-	-	-
	50	1.63	2.63	<b>W4200</b>	1.77	50 - 36	<b>W4200R107</b>	-	-	-	-
	55	1.73	2.89	<b>W4203</b>	1.81	55 - 41	<b>W4203R110</b>	55 - 36	<b>W4203R107</b>	55 - 32	<b>W4203R104</b>
	60	1.83	2.78	<b>W4206</b>	1.86	60 - 50	<b>W4206R200</b>	60 - 46	<b>W4206R113</b>	60 - 36	<b>W4206R107</b>
	65	1.95	3.00	<b>W4209</b>	1.86	65 - 55	<b>W4209R203</b>	65 - 50	<b>W4209R200</b>	65 - 46	<b>W4209R113</b>
	70	2.07	3.08	<b>W4212</b>	1.91	70 - 60	<b>W4212R206</b>	70 - 55	<b>W4212R203</b>	-	-
	75	2.18	3.21	<b>W4215</b>	1.95	75 - 65	<b>W4215R209</b>	75 - 60	<b>W4215R206</b>	-	-
	-	-	-	<b>W4215</b>	-	75 - 55	<b>W4215R203</b>	75 - 50	<b>W4215R200</b>	-	-
	80	2.30	3.29	<b>W4302</b>	2.00	80 - 75	<b>W4302R215</b>	80 - 70	<b>W4302R212</b>	80 - 65	<b>W4302R209</b>
	-	-	-	<b>W4302</b>	-	80 - 55	<b>W4302R203</b>	80 - 50	<b>W4302R200</b>	-	-
<b>W8000</b>	85	2.44	3.37	<b>W4085M</b>	2.04	-	-	-	-	-	-
	50	1.77	3.08	<b>W8200</b>	3.68	-	-	-	-	-	-
	55	1.89	3.15	<b>W8203</b>	3.68	-	-	-	-	-	-
	60	2.01	3.25	<b>W8206</b>	3.68	-	-	-	-	-	-
	65	0.09	3.38	<b>W8209</b>	3.68	65 - 50	<b>W8209R200</b>	-	-	-	-
	70	2.07	3.34	<b>W8212</b>	3.58	70 - 55	<b>W8212R203</b>	-	-	-	-
	75	2.28	3.35	<b>W8215</b>	3.58	75 - 60	<b>W8215R206</b>	75 - 55	<b>W8215R203</b>	-	-
	80	2.38	3.52	<b>W8302</b>	3.63	80 - 65	<b>W8302R209</b>	80 - 60	<b>W8302R206</b>	80 - 55	<b>W8302R203</b>
	-	-	-	-	-	80 - 50	<b>W8302R200</b>	-	-	-	-
	85	2.60	3.63	<b>W8085M</b>	3.72	85 - 70	<b>W8085R070M</b>	85 - 65	<b>W8085R065M</b>	85 - 60	<b>W8085R060M</b>
	-	-	-	-	-	85 - 55	<b>W8085R055M</b>	-	-	-	-
	90	2.91	4.05	<b>W8090M</b>	3.99	90 - 75	<b>W8090R075M</b>	-	-	-	-
	95	2.91	4.05	<b>W8312</b>	3.99	95 - 80	<b>W8312R302</b>	95 - 75	<b>W8312R215</b>	-	-
	100	3.13	4.33	<b>W8315</b>	4.22	-	-	-	-	-	-
	105	3.13	4.33	<b>W8402</b>	4.22	-	-	-	-	-	-
<b>W15000</b>	65	2.32	3.49	<b>W15209</b>	6.17	-	-	-	-	-	-
	70	2.32	3.49	<b>W15212</b>	6.17	-	-	-	-	-	-
	75	2.44	3.56	<b>W15215</b>	6.22	-	-	-	-	-	-
	80	2.54	3.66	<b>W15302</b>	6.26	80 - 65	<b>W15302R209</b>	-	-	-	-
	85	2.74	3.80	<b>W15085M</b>	6.40	85 - 70	<b>W15085R070M</b>	-	-	-	-
	90	2.95	4.01	<b>W15090M</b>	6.58	90 - 75	<b>W15090R75M</b>	-	-	-	-
	95	2.95	4.01	<b>W15312</b>	6.62	95 - 80	<b>W15312R302</b>	95 - 75	<b>W15312R215</b>	-	-
	-	-	-	-	-	-	-	-	-	-	-
	100	3.17	4.06	<b>W15315</b>	6.72	-	-	-	-	-	-
	105	3.17	4.06	<b>W15402</b>	6.72	105 - 90	<b>W15402R090M</b>	-	-	-	-
	110	3.44	4.52	<b>W15405</b>	6.85	110 - 95	<b>W15110R095M</b>	-	-	-	-
115	3.44	4.52	<b>W15115M</b>	6.85	115 - 100	<b>W15115R100M</b>	-	-	-	-	

## TSP Series

- Pro Series Swivel featuring Tilt and Swivel technology
- 360 degree X-axis and 160 degree Y-axis rotation
- 10,000 psi / 700 bar maximum working pressure
- Increases tool fit in restricted access areas
- Simplifies hose placement




Wrench Model	Model Number	Dimensions (in)				Weight (lbs)
		A	B	C	D	
W2000, W4000	<b>TSP100</b>	2.52	1.06	.91	1.60	.41
W8000, W15000	<b>TSP200</b>	2.64	1.06	1.02	1.65	.43

To order a W-series wrench fitted with the TSP swivel, suffix the model number with "-P". e.g., W2000-P.

## WTE Series


- Extended reaction arm for W-series wrench
- Full torque rated
- Increases tool fit in restricted access areas



Wrench Model	Model Number	Dimensions (in)			Weight (lbs)
		A	B	C	
W2000	<b>WTE20</b>	18.60	1.50	2.19	0.81
W4000	<b>WTE40</b>	20.73	2.00	2.58	1.83
W8000	<b>WTE80</b>	21.48	2.50	3.35	4.30
W15000	<b>WTE150</b>	24.26	3.00	4.00	8.69

## WRP Series

- Low profile reaction paddle
- Lightweight interchangeable design
- Provides greater flexibility in areas with restricted access

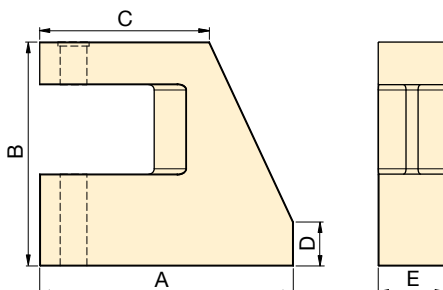









Wrench Model	Model Number	Dimensions (in)					Weight (lbs)
		A	B	C	D	E	
W2000	<b>WRP20</b>	3.75	3.31	2.50	.64	1.00	.82
W4000	<b>WRP40</b>	5.15	4.29	3.31	1.10	1.25	1.83
W8000	<b>WRP80</b>	6.10	5.37	4.08	1.04	1.78	4.30
W15000	<b>WRP150</b>	7.34	6.50	5.93	1.25	2.00	8.69



## Optimum Torque Wrench and Pump Combinations

For optimum speed and performance Enerpac recommends the following system set-up with wrench-pump-hose combinations.

	ELECTRIC PUMPS				AIR DRIVEN PUMPS		TWIN HOSES
	PMU-Series	ZU4-Series	ZE4/5-Series	PTA-Series	ZA4T-Series	THQ-Series THC-Series	
							
	Page: 207	Page: 208	Page: 212	Page: 214	Page: 216		
<b>10,000 psi Torque Wrenches</b>	Flow at rated pressure: 20 in <sup>3</sup> /min 115V, 1 ph	Flow at rated pressure: 20 in <sup>3</sup> /min 230V, 1 ph	Flow at rated pressure: 60 in <sup>3</sup> /min 115V, 1 ph	Flow at rated pressure: 60-120 in <sup>3</sup> /min 115V, 230V, 380V, 3 ph	Flow at rated pressure: 20 in <sup>3</sup> /min	Flow at rated pressure: 60 in <sup>3</sup> /min	
<b>Model No.</b>							
 192	S1500 S3000	PMU-10427-Q PMU-10422-Q	Any ZU4-Series pump may be used.	Any ZE-Series pump may be used.	PTA-1404-Q	Any ZA4T- Series pump may be used.	THQ-706T (19.5 ft) THQ-712T (39.0 ft)
	S6000 S11000 S25000	-			-		
 198	W2000 W4000	PMU-10427-Q PMU-10422-Q			PTA-1404-Q		
	W8000 W15000	-			-		



### ZU4-Series Electric Torque Wrench Pump

Utilizing a universal motor, the ZU4-Series has excellent low voltage characteristics. It works well with long extension cords or generator driven electrical power supplies. A field proven, efficient design ensures this pump is dependable and will draw less current—lowering your operating costs. The pumps are available in Pro and Classic formats. *ZU4 Pro* pumps have an LCD feature to display torque or pressure, selectable torque wrench, and self diagnostics – premium features not available on any other pump. *ZU4 Classic* pumps feature an analog gauge and a basic electrical package to deliver durable, safe and efficient hydraulic power.

### ZE-Series Electric Torque Wrench Pump

The ZE-Series features premium options, such as the LCD to display torque or pressure values, and self diagnostics. These pumps utilize an induction motor, making the ZE-Series the coolest and quietest pumps in their class.

### ZA-Series Air Torque Wrench Pump

Utilizing the highly efficient design of the *Z-Class* pumping element, this air driven pump is best suited to power medium to large size torque wrenches.



**11,600 psi (800 bar) pumps are available for higher pressure wrenches. See pump product pages.**



### IMPORTANT!

**Always make sure that the torque scale on the pump matches the torque wrench size for accurate torque settings.**



**Call Enerpac!**  
For other combinations, consult your Enerpac bolting expert or your authorized Enerpac distributor.

# Portable Electric Torque Wrench Pumps

▼ Shown: **PMU-10427**



- Powerful two-speed pump is lightweight and easy to carry
- Standard heat exchanger package keeps pump cool under extreme use
- Glycerin filled gauge with scales reading in psi and bar
- Transparent overlays in Ft.lbs and Nm for all Enerpac torque wrenches provide a quick torque reference
- Universal motor for a high power-to-weight ratio; generates full pressure on as little as 50% of the rated line voltage
- Adjustable pressure relief valve for accurate torque adjustments and precise repeatability

## ▼ PERFORMANCE CHART

For Use With Torque Wrenches		Maximum Pressure Rating (psi)		Oil Flow Rate (in <sup>3</sup> /min)		Model Number	Useable Oil Capacity (gal)	Electric Motor	Dimensions L x W x H (in)	Weight (lbs)
		1 <sup>st</sup> stage	2 <sup>nd</sup> stage	1 <sup>st</sup> stage	2 <sup>nd</sup> stage					
S1500 S3000	W2000	700	10,000	200	20	PMU-10427-Q	.50	115V- 1 ph -50/60Hz	17 x 11 x 15	53
		700	10,000	200	20	PMU-10447-Q	1.0	115V- 1 ph -50/60Hz	17 x 13 x 15	60
	W4000	700	10,000	200	20	PMU-10422-Q	.50	230V- 1 ph -50/60Hz	17 x 11 x 15	53
		700	10,000	200	20	PMU-10442-Q	1.0	230V- 1 ph -50/60Hz	17 x 13 x 15	60
SQD-25-I SQD-50-I	HXD-30	700	11,600	200	20	PMU-10427	.50	115V- 1 ph -50/60Hz	17 x 11 x 15	53
		700	11,600	200	20	PMU-10447	1.0	115V- 1 ph -50/60Hz	17 x 13 x 15	60
	HXD-60	700	11,600	200	20	PMU-10422	.50	230V- 1 ph -50/60Hz	17 x 11 x 15	53
		700	11,600	200	20	PMU-10442	1.0	230V- 1 ph -50/60Hz	17 x 13 x 15	60

## PMU Series

Reservoir Capacity:

**0.5-1 gal.**

Flow at 10,000 psi:

**20 in<sup>3</sup>/min.**

Motor Size:

**0.5 hp**

Maximum Operating Pressure:

**10,000 and 11,600 psi**



### Pump Ratings

-Q suffix pumps are for 10,000 psi torque wrenches, and include spin-on couplers.

-E suffix pumps are for use with 11,600 psi rated torque wrenches, and include polarized lock-ring safety couplers.



### Twin Torque Wrench Hoses

Use Enerpac THQ-700 series twin hoses with 10,000 psi pumps, or use THC-700 series twin hoses with

11,600 psi pumps.

10,000 psi	
19.5 feet long, 2 hoses	<b>THQ-706T</b>
39 feet long, 2 hoses	<b>THQ-712T</b>
11,600 psi	
19.5 feet long, 2 hoses	<b>THC-7062</b>
39 feet long, 2 hoses	<b>THC-7122</b>

▼ Shown: ZU4204TB-Q and ZU4204BB-Q



## Z Tough. Dependable. Innovative. Z-CLASS



### New FIRMWARE, for Pro-Series

- Display torque in Ft.lbs. or Nm
- Display pressure in bar, MPa or psi
- Torque wrench model is selectable
- “Auto cycle” setting easily programmable



### Classic Electrical

Basic electrical package includes mechanical contactor, ON/OFF toggle switch, pendant with electro-mechanical pushbuttons, 24V transformer timer and operator accessible circuit breaker.



### Back-lit LCD, for Pro-Series

- Pump usage information, hour and cycle counts
- Low-voltage warning and recording
- Self-test and diagnostic capabilities
- Information can be displayed in English, French, German, Italian, Spanish and Portuguese
- Pressure transducer is more accurate and durable than analog gauges

- Features Z-Class high-efficiency pump design; higher oil flow and bypass pressure, cooler running and requires 18% less current draw than comparable pumps
- Powerful 1.7 hp universal electric motor provides high power-to-weight ratio and excellent low-voltage operating characteristics
- High-strength, molded composite shroud protects motor and electrical components, while providing an ergonomic, non-conductive handle for easy transport
- Low-voltage pendant provides additional safety for the operator
- Valve technology reduces oil operating temperatures and withstands contaminants to increase pump reliability
- LCD readout provides pressure and torque display and a number of diagnostic and readout capabilities never before offered on a portable electric pump
- Auto cycle feature provides continuous cycle operation of the torque wrench as long as the advance button is pressed. (Pump can be used with or without auto cycle feature)

▼ Any brand of hydraulic torque wrench can be powered by the portable ZU4-Series torque wrench pump.





# ZU4 Torque Wrench Pumps



## Z-Class – A Pump For Every Application

Patented Z-Class pump technology provides high by-pass pressures for increased productivity—important in applications using long hose runs and high pressure-drop circuits, like heavy lifting or certain double-acting tools.

Enerpac ZU4 Hydraulic Pumps are built to power small to large torque wrenches. Choosing the right ZU4 torque wrench pump for your application is easy.

### Classic Electric Torque Wrench Pump

- The Classic has an analog gauge and traditional electro-mechanical components (transformers, relays and switches) in place of solid-state electronics. The Classic delivers durable, safe and efficient hydraulic power.

### Pro Series Electric Torque Wrench Pump

- Digital (LCD) display features a built-in hour meter, pressure and torque display, and shows self-diagnostic, cycle-count and low voltage warning information. These premium features are not available on any other pump—anywhere!

AutoCycle feature provides continuous cycle operation of the torque wrench as long as the advance button is pressed. (Pump can be used with or without AutoCycle feature).

## ZU4 Series



Reservoir Capacity:

**1 and 1.75 gal.**

Flow at 10,000 psi:


**60 in<sup>3</sup>/min.**

Motor Size:

**1.7 hp**

Maximum Operating Pressure:

**10,000 and 11,600 psi**

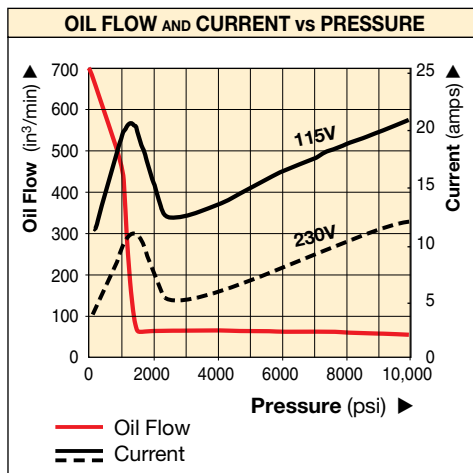

### Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench pump and hose

selection matrix.

Page: 204



### Pump Ratings

-Q suffix pumps are for 10,000 psi torque wrenches, and include spin-on couplers.

-E suffix pumps are for use with 11,600 psi rated torque wrenches, and include polarized lock-ring safety couplers.

## COMMON PUMP MODELS

	For Use With Torque Wrenches	Model Number <sup>1) 4)</sup>	Motor Electrical Specification	Usable Oil Capacity (gal)	Weight with Oil (lbs)
Pro Series	All wrenches	ZU4204TB-Q	115 VAC, 1-ph	1.0	70
		ZU4208TB-Q	115 VAC, 1-ph	1.75	76
		ZU4204TE-Q <sup>2)</sup>	208-240 VAC, 1-ph	1.0	70
		ZU4208TE-Q <sup>2)</sup>	208-240 VAC, 1-ph	1.75	76
		ZU4204TI-Q <sup>3)</sup>	208-240 VAC, 1-ph	1.0	70
		ZU4208TI-Q <sup>3)</sup>	208-240 VAC, 1-ph	1.75	76
Classic	All wrenches	ZU4204BB-QH	115 VAC, 1-ph	1.0	82
		ZU4204BB-Q	115 VAC, 1-ph	1.0	73
		ZU4208BE-QH <sup>2)</sup>	208-240 VAC, 1-ph	1.75	83
		ZU4204BE-Q <sup>2)</sup>	208-240 VAC, 1-ph	1.0	74
		ZU4208BI-QH	208-240 VAC, 1-ph	1.75	88
		ZU4208BI-Q	208-240 VAC, 1-ph	1.75	79

1) All models meet CE safety requirements and all TÜV requirements

2) European plug and CE EMC directive compliant

3) With NEMA 6-15 plug

4) Select -E suffixed pumps for Enerpac SQD and HXD 11,600 psi torque wrenches



### Gauge Overlay Kit

Gauge overlay kits are also available separately.

GT-4015-Q includes overlays for all S- and W-Series

torque wrenches.

# ZU4 Ordering Matrix and Specifications

▼ This is how a ZU4 Series pump model number is built up:

<b>Z</b>	<b>U</b>	<b>4</b>	<b>2</b>	<b>08</b>	<b>T</b>	<b>E</b>	<b>-</b>	<b>Q</b>	<b>H</b>	<b>M</b>
1	2	3	4	5	6	7		8	8	8
Product Type	Motor Type	Flow Group	Valve Type	Reservoir Size	Valve Operation	Voltage		Must be E or Q	Options	Options

### 1 Product Type

**Z** = Pump series

### 2 Motor Type

**U** = Universal electric motor

### 3 Flow Group

**4** = 60 in<sup>3</sup>/min @ 10,000 psi

### 4 Valve Type

**2** = Torque wrench valve

### 5 Reservoir Size (useable capacity)

**04** = 1.0 gallon  
**08** = 1.75 gallons

### 6 Valve Operation

**T** = Solenoid valve with pendant, LCD Electric and pressure transducer.

**B** = Solenoid valve with pendant, classic electrical

### 7 Voltage

**B** = 115V, 1 ph, 50/60 Hz  
**E** = 208-240V, 1 ph, 50/60 Hz (with European plug CE RF compliant)  
**I** = 208-240V, 1 ph, 50/60 Hz (with NEMA 6-15 plug)

### 8 Factory installed features and options

**E** = 11,600 coupler for use with HXD-, SQD-Series or other wrenches  
**Q** = 10,000 coupler for use with S- and W-Series or other wrenches  
**H** = Heat exchanger  
**K** = Skidbar  
**M** = 4-wrench manifold  
**R** = Roll cage



How to order your ZU4-Series torque wrench pump

### Ordering Example 1

#### Model No. ZU4208TB-QMHK

10,000 psi pump for use with Enerpac S- and W-Series and other 10,000 psi torque wrenches, 115V motor, 1.75 gallon reservoir, 4-wrench manifold, heat exchanger and skidbar.

Refer to the torque wrench pump selection matrix for optimum wrench, pump and hose combinations.


Page: 204



### Twin Torque Wrench Hoses

Use Enerpac THQ-700 series twin hoses with 10,000 psi pumps, or use THC-700 series twin hoses with 11,600 psi pumps.

10,000 psi	
19.5 feet long, 2 hoses	<b>THQ-706T</b>
39 feet long, 2 hoses	<b>THQ-712T</b>
11,600 psi	
19.5 feet long, 2 hoses	<b>THC-7062</b>
39 feet long, 2 hoses	<b>THC-7122</b>

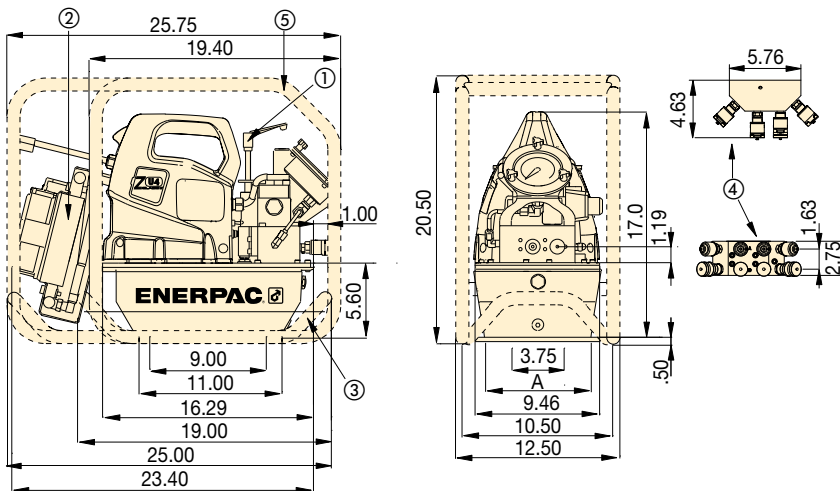

### ZU4-Series Torque Wrench Pumps

Reservoir Size (useable gallons)	A (in)
1	6.0
1.75	8.1

Dimensions shown in inches

- ① User adjustable relief valve
- ② Heat exchanger (optional)
- ③ Skidbar (optional)
- ④ 4-wrench manifold (optional)
- ⑤ Roll cage (optional)

ZU4 Performance							
Motor Size (hp)	Output Flow Rate (in <sup>3</sup> /min)				*Motor Electrical Specification	Sound Level (dBA)	Relief Valve Adjustment Range (psi)
	100 psi	700 psi	5,000 psi	10,000 psi			
1.7	700	535	76	60	115 VAC, 1-ph 208-240 VAC, 1-ph	85-90	1,800-10,000**

\* 50/60 HZ

\*\* Pump type (-Q) shown, (-E) range is 1,800 - 11,600 psi.

▼ Most hydraulic torque wrenches can be powered by the Enerpac ZU4-Series torque wrench pump.



# ZU4 Torque Wrench Pump Options



## Heat Exchanger

- Removes heat from the bypass oil to provide cooler operation
- Stabilizes oil viscosity, increasing oil life and reduces wear of pump and other hydraulic components

Accessory Kit No. *	Can be used with:
ZHE-U115	115V pumps
ZHE-U230	230V pumps

\* Add suffix **H** to pump model number for factory installation. Heat Exchanger adds 9.1 lbs. to pump weight.

### Ordering Example:

Model No. ZU4208TE-H



## Skidbar

- Provides greater pump stability on soft or uneven surfaces
- Provides easy two-handed lift

Accessory Kit No. *	Can be used on ZU4-Series torque wrench pumps
SBZ-4	1 and 2 gallon <sup>1)</sup>
SBZ-4L	1 and 2 gallon <sup>2)</sup>

\* Add suffix **K** to pump model number for factory installation.

<sup>1)</sup> Without heat exchanger 4.9 lbs.

<sup>2)</sup> With heat exchanger 7.0 lbs.

### Ordering Example:

Model No. ZU4208TB-QK



## Roll Cage

- Protects pump
- Provides greater pump stability

Accessory Kit No. *	Can be used on ZU4-Series torque wrench pumps
ZRC-04	1 and 2 gallon reservoir <sup>1)</sup>
ZRC-04H	1 and 2 gallon reservoir <sup>2)</sup>

\* Add suffix **R** for factory installation.

<sup>1)</sup> Without heat exchanger

<sup>2)</sup> With heat exchanger

### Ordering Example:

Model No. ZU4208BB-QR

## ZU4 Series



Reservoir Capacity:

**1 and 1.75 gal.**

Flow at 10,000 psi:

**60 in<sup>3</sup>/min.**

Motor Size:

**1.7 hp**

Maximum Operating Pressure:

**10,000 and 11,600 psi**



## 4-Wrench Manifold

- For simultaneous operation of multiple torque wrenches
- Can be factory installed or ordered separately

Accessory Kit No. *	Can be used on ZU4-Series torque wrench pumps
ZTM-E	for 11,600 psi torque wrenches
ZTM-Q	for 10,000 psi torque wrenches

\* Add suffix **M** to pump model number for factory installation.

### Ordering Example:

Model No. ZU4208TB-QM

▼ Shown: ZE4204TB-QHR



- Features **Z-Class** high-efficiency pump design; higher oil flow and bypass pressure, cooler running and requires 18% less current draw than comparable pumps
- Totally enclosed, fan-cooled industrial electric motors supply extended life and stand up to harsh industrial environments
- Low-voltage pendant provides additional safety for the operator
- High-strength, molded electrical enclosure protects electronics, power supplies and LCD readout from harsh environments
- LCD readout provides pressure and torque display and a number of diagnostic and readout capabilities never before offered on a portable electric pump
- Auto cycle feature provides continuous cycle operation of the torque wrench as long as the advance button is pressed (Pump can be used with or without auto cycle feature)
- Valve technology reduces oil operating temperatures and withstands contaminants to increase pump reliability

**Z** Tough.  
Dependable.  
Innovative.  
**CLASS**



#### New FIRMWARE 7.0

- Display torque in Ft.lb. or Nm
- Display pressure in bar, MPa or psi
- Torque wrench model is selectable
- “Auto cycle” setting easily programmable



#### Back-lit LCD



- Pump usage information, hour and cycle counts
- Low-voltage warning and recording
- Self-test and diagnostic capabilities
- Information can be displayed in English, French, German, Italian, Spanish and Portuguese
- Pressure transducer is more accurate and durable than analog gauges

▼ The ZE4 torque wrench pumps are perfectly matched for this W2000 wrench.



# ZE Electric Torque Wrench Pumps

**ZE4 and ZE5 Oil Flow and Current vs. Pressure**

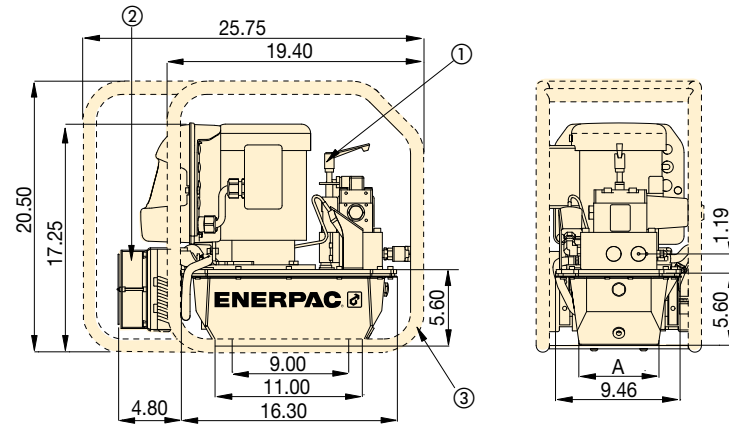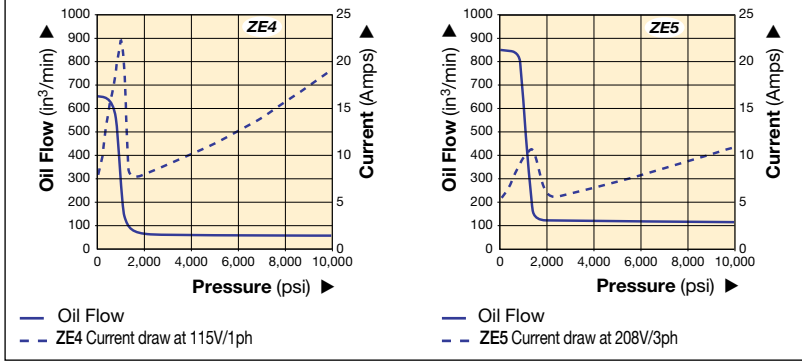

Reservoir Size (useable gallons)	A (in)
1	6.0
1.75	8.1

- Dimensions shown in inches.
- ① User adjustable relief valve
  - ② Heat Exchanger (optional)
  - ③ Roll cage (optional)

## ZE Series



Reservoir Capacity:

**1.0-10 gal.**

Flow at 10,000 psi:

**60-120 in<sup>3</sup>/min.**

Motor Size:

**1.5-3.0 hp**

Maximum Operating Pressure:

**10,000 and 11,600 psi**



All Z-Class electric pumps are TÜV and CE compliant.



### Accessory Options

A full list of optional accessories can be found in the ZU4 section.

Page: 209

### ▼ COMMON PUMP MODELS

Max. Operating Pressure (psi)	Model Number	Motor Electrical Specification	Usable Oil Capacity (gal)	Weight with Oil (lbs)
10,000	ZE4204TB-QHR	115V 1 phase	1	129
10,000	ZE4204TE-QHR	230V 1 phase	1	129
10,000	ZE4204TG-QHR	230V 3 phase	1	131
10,000	ZE5204TW-QHR	400V 3 phase	1	131
11,600	ZE4204TB-EHR	115V 1 phase	1	129
11,600	ZE4204TE-EHR	230V 1 phase	1	129
11,600	ZE4204TG-EHR	230V 3 phase	1	132
11,600	ZE5204TW-EHR	400V 3 phase	1	132

### ▼ PERFORMANCE CHART

Pump Series	Output Flow Rate (in <sup>3</sup> /min)				Motor Size		Relief Valve Adjustment Range (psi)	Sound Level (dBA)
	100 psi	700 psi	5,000 psi	10,000 psi	hp	RPM		
ZE4	650	600	62	60	1.5	1750	1000 - 11,600	75
ZE5	850	825	123	120	3.0	1750	1000 - 11,600	75

Flow rate will be approximately 5/6 of these values at 50 Hz.

▼ Shown: PTA-1404



## Two-Stage Power in a Portable Design



### Pump Ratings

-Q suffix pumps are for 10,000 psi torque wrenches, and include spin-on couplers.

-E suffix pumps are for use with 11,600 psi rated torque wrenches, and include polarized lock-ring safety couplers.

- Compact and portable
- Handle located directly over pump's center of gravity for greater ease in carrying
- High bypass (1800 psi) for faster torque cycles
- High power-to-weight ratio suits all Enerpac torque wrenches
- Glycerine filled pressure gauge with scales reading in psi/bar
- Transparent overlays in Ft.lbs and Nm for all Enerpac torque wrenches provide a quick torque reference
- Internal safety relief valve, factory preset
- 15 ft. air pendant assembly enables easy maneuvering at the job site



### Twin Torque Wrench Hoses

Use Enerpac THQ-700 series twin hoses with 10,000 psi pumps, or use THC-700 series twin hoses with 11,600 psi pumps.

10,000 psi	
19.5 feet long, 2 hoses	<b>THQ-706T</b>
39 feet long, 2 hoses	<b>THQ-712T</b>
11,600 psi	
19.5 feet long, 2 hoses	<b>THC-7062</b>
39 feet long, 2 hoses	<b>THC-7122</b>




### Gauge Overlay Kit


Gauge overlay kits are also available separately.

**GT-4015-Q** includes overlays for all S- and W-Series torque wrenches.

# Compact Pneumatic Torque Wrench Pump

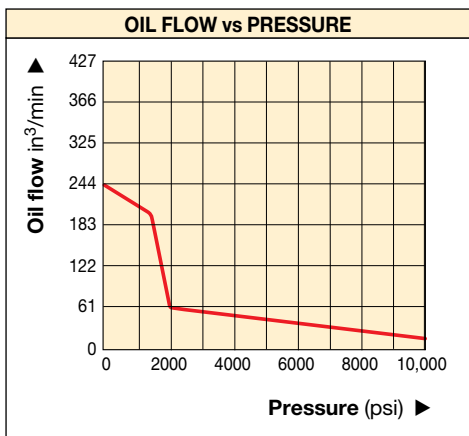

**PTA Series**



Reservoir Capacity:

**1 gal.**


Flow at 10,000 psi:

**20 in<sup>3</sup>/min.**

Maximum Operating Pressure:

**10,000 and 11,600 psi**

Dimensions shown in inches.

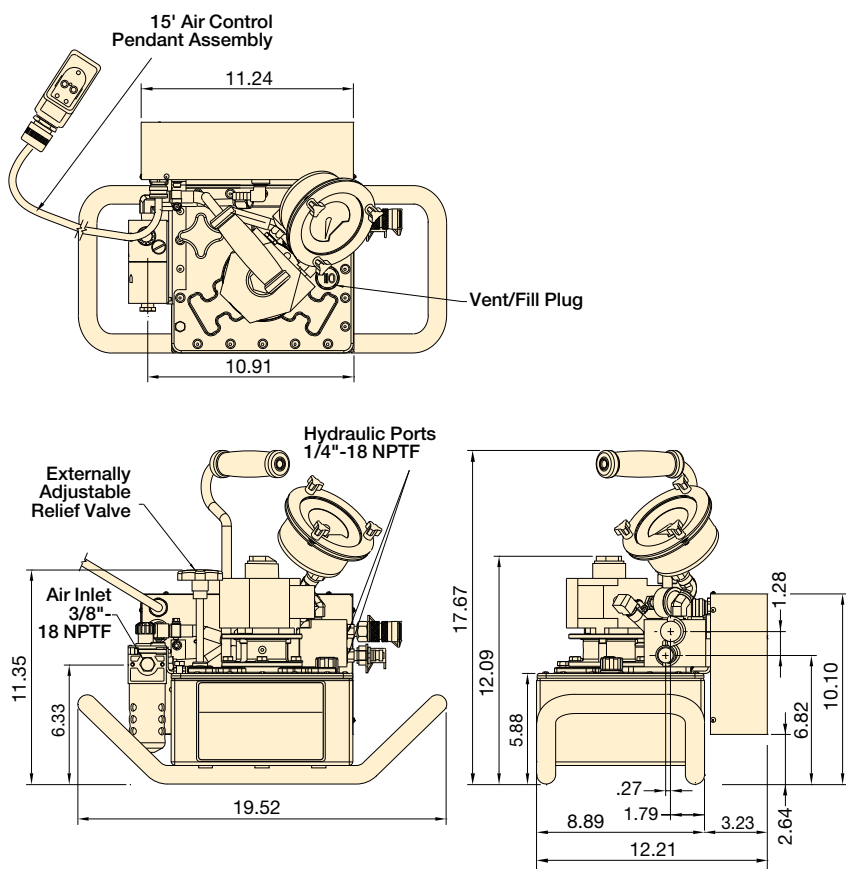

## Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench pump and hose selection matrix.

Page: 204

## ▼ PERFORMANCE CHART

For Use With Torque Wrenches		Pressure Rating	Model Number	Reservoir Capacity	Useable Oil Capacity	Pump Flow Rates		Air Consumption	Air Pressure Range	Weight with Oil
		(psi)		(gal)	(gal)	(in <sup>3</sup> )		@ 100 psi (scfm)	(psi)	(lbs)
						1 <sup>st</sup> stage	2 <sup>nd</sup> stage			
S1500 S3000	W2000 W4000	10,000	<b>PTA-1404-Q</b>	1.0	0.5	240	20	40	49-101	54
SQD-25-I SQD-50-I	HXD-30 HXD-60	11,600	<b>PTA-1404</b>	1.0	0.5	240	20	40	49-101	54

▼ Shown: **ZA4204TX-Q**



**Z** Tough.  
Dependable.  
Innovative.  
**CLASS**

- Features **Z-Class** high-efficiency pump design; higher oil flow and bypass pressure
- Two-speed operation and high by-pass pressure reduces cycle time for improved productivity
- Heat exchanger warms exhaust air to prevent freezing and cools the oil
- Ergonomic pendant allows remote operation up to 20 feet
- Glycerin filled pressure gauge with transparent overlays in Ft.lbs and Nm for Enerpac torque wrenches provide a quick torque reference
- Regulator-Filter-Lubricator with removeable bowls and auto drain is standard
- Valve technology reduces oil operating temperatures and withstands contaminants to increase pump reliability



### Pump Ratings

-**Q** suffix pumps are for 10,000 psi torque wrenches, and include spin-on couplers.

-**E** suffix pumps are for use with 11,600 psi rated torque wrenches, and include polarized lock-ring safety couplers.



### Twin Torque Wrench Hoses

Use Enerpac THQ-700 series twin hoses with 10,000 psi pumps, or use THC-700 series twin hoses with 11,600 psi pumps.

10,000 psi	
19.5 feet long, 2 hoses	<b>THQ-706T</b>
39 feet long, 2 hoses	<b>THQ-712T</b>
11,600 psi	
19.5 feet long, 2 hoses	<b>THC-7062</b>
39 feet long, 2 hoses	<b>THC-7122</b>



◀ Most hydraulic torque wrenches can be powered by the Enerpac ZA4T-Series torque wrench pump.



# ZA4T Specifications



## ZA4T-Series Pump Applications

The ZA4T-Series pump is best suited to power medium to large size torque wrenches.

Patent-pending Z-Class technology provides high by-pass pressures for increased productivity. Its high

power-to-weight ratio and compact design make it ideal for applications which require easy transport of the pump.

For further application assistance contact your local Enerpac office.

## ZA4T Series



Reservoir Capacity:


**1 and 1.75 gal.**

Flow at 10,000 psi:

**60 in<sup>3</sup>/min.**

Maximum Operating Pressure:

**10,000 and 11,600 psi**

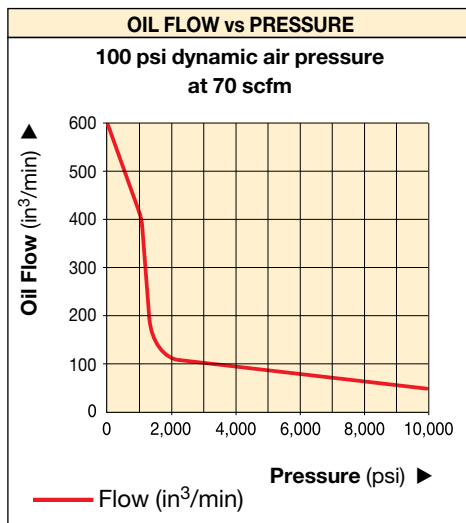

### ATEX Certified

The ZA-series pumps are tested and certified according to the Equipment Directive 94 / 9 / EC "ATEX Directive". The explosion protection is for equipment group II, equipment category 2 (hazardous area zone 1), in gas and/or dust atmospheres. The ZA-series pumps are marked with: Ex II 2 GD ck T4.



### ▼ COMMON PUMP MODELS

For Use With Torque Wrenches		Maximum Operating Pressure (psi)	Model Number <sup>1)</sup>	Usable Oil Capacity (gal)	Weight with Oil (lbs)
S1500 S3000 S6000 S11000 S25000	W2000 W4000 W8000 W15000	10,000	ZA4204TX-Q	1.0	94
		10,000	ZA4208TX-Q	1.75	100
		10,000	ZA4204TX-QR	1.0	101
SQD-75-I SQD-100-I SQD-160-I SQD-270-I	HXD-120 HXD-240	11,600	ZA4204TX-E	1.0	94
		11,600	ZA4208TX-E	1.75	100
		11,600	ZA4204TX-ER	1.0	101

<sup>1)</sup> All models meet CE safety requirements and all TÜV requirements.



### Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench, pump and hose selection matrix.

Page: 204



### Accessory Options

Available by placing the following additional suffix at the end of the model number:

- K** = Skidbar
- M** = 4-wrench manifold
- R** = Roll cage

Page: 216

# ZA4T Ordering Matrix and Specifications

▼ This is how a ZA4T-Series pump model number is built up:



1	2	3	4	5	6	7	8	8	8
Product Type	Motor Type	Flow Group	Valve Type	Reservoir Size	Valve Operation	Voltage	Must be E or Q	Options	Options

### 1 Product Type

**Z** = Pump Series

### 2 Motor Type

**A** = Air motor

### 3 Flow Group

**4** = 60 in<sup>3</sup>/min @ 10,000 psi

### 4 Valve Type

**2** = Torque Wrench Valve

### 5 Reservoir Size (useable capacity)

**04** = 1.0 gallon

**08** = 1.75 gallons

### 6 Valve Operation

**T** = Air operated valve with pendant

### 7 Voltage

**X** = Not applicable

### 8 Factory installed features and options

**E** = 11,600 psi coupler for use with HXD- and SQD-Series wrenches

**Q** = 10,000 psi coupler for use with S- and W-Series or other wrenches

**K** = Skidbar

**M** = 4-wrench manifold

**R** = Roll cage



## How to order your ZA4T-Series torque wrench pump


### Ordering Example 1

#### Model No. ZA4208TX-QMR

**10,000 psi** pump for use with Enerpac S- and W-Series and other 10,000 psi torque wrenches, 1.75 gallon reservoir, 4-wrench manifold, and roll cage.

Refer to the torque wrench pump selection matrix for optimum wrench, pump and hose combinations.

Dimensions shown in inches.

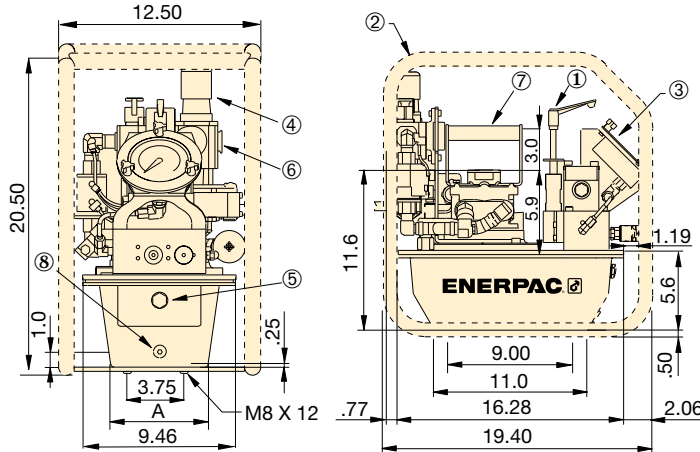

- ① User adjustable relief valve
- ② Roll bar cage (optional)
- ③ Gauge with overlays
- ④ Filter/lubricator/regulator
- ⑤ Oil level sight gauge
- ⑥ Air input 1/2" NPTF
- ⑦ Standard handle
- ⑧ Oil drain

### ZA4T-Series Torque Wrench Pumps

Reservoir Size (useable gallons)	A (in)
1	6.0
1.75	8.1

ZA4T Performance										
Output Flow Rate					Dynamic Air Pressure Range	Air Consumption	Sound Level at 100 psi Dynamic	Relief Valve Adjustment Range		
(in <sup>3</sup> /min)									(psi)	(scfm)
100 psi	700 psi	5,000 psi	10,000 psi	11,600 psi						
600	500	80	60	55	60-100	20-100	80-95	1,400-10,000*		

\* Pump type (-Q) shown.

# ZA4T Torque Wrench Pump Options



## Skidbar

- Provides greater pump stability on soft or uneven surfaces
- Provides two-handed lift

Accessory Kit No. *	Can be used on ZA4T-Series torque wrench pumps
SBZ-4	1 and 2 gallon reservoir

\* Add suffix **K** for factory installation. Skidbar weight 4.9 lbs.

### Ordering Example:

Model No. ZA4208TX-QK



## 4-Wrench Manifold

- For simultaneous operation of multiple torque wrenches
- Can be factory installed or ordered separately

Accessory Kit No. *	Can be used on ZA4T-Series torque wrench pumps
ZTM-E	for 11,600 psi torque wrenches
ZTM-Q	for 10,000 psi torque wrenches

\* Add suffix **M** for factory installation.

### Ordering Example:

Model No. ZA4208TX-QM

## ZA4T Series



Reservoir Capacity:

**1 and 1.75 gal.**

Flow at 10,000 psi:

**60 in<sup>3</sup>/min.**

Maximum Operating Pressure:

**10,000 and 11,600 psi**



## Gauge Overlay Kit

Gauge overlay kits are also available separately.

**GT-4015** includes overlays for all SQD and HXD torque wrenches. **GT-4015-Q** includes overlays for all S- and W-Series torque wrenches.



## Roll Cage

- Protects pump
- Provides greater pump stability

Accessory Kit No. *	Can be used on ZA4T-Series torque wrench pumps
ZRC-04	1 and 2 gallon reservoir

\* Add suffix **R** for factory installation. Roll bar cage weight 7.5 lbs.

### Ordering Example:

Model No. ZA4208TX-QR



## Twin Torque Wrench Hoses

Use Enerpac THQ-700 series twin hoses with 10,000 psi pumps, or use THC-700 series twin hoses with 11,600 psi pumps.

10,000 psi	
19.5 feet long, 2 hoses	<b>THQ-706T</b>
39 feet long, 2 hoses	<b>THQ-712T</b>
11,600 psi	
19.5 feet long, 2 hoses	<b>THC-7062</b>
39 feet long, 2 hoses	<b>THC-7122</b>

# Flange Alignment Tools

▼ From left to right: **ATM-3, ATM-1, ATM-5**



- Rectifies twist and rotational misalignment without additional stress in pipe lines
- For most commonly used ANSI, API, BS and DIN flanges
- No slings, hooks, or lifting gear. Extremely safe, high precision
- ATM-1 supplied with three bushings for different bolt hole sizes. Can be used in reversed position.
- ATM-3 fits when flange joint is:
  - between 1.18 - 5.23 inches apart and
  - bolt hole size 0.95 inches or greater
- ATM-5 fits when flange joint is:
  - between 3.75 - 9 inches apart and
  - bolt hole size 1.25 inches or greater
- Can be installed and used in any position and any location
- Stays stable in position under full load

## ATM Series

Bolt Hole Range:  
**1<sup>1</sup>/<sub>16</sub> - 2<sup>1</sup>/<sub>8</sub> inches**

Flange Wall Thickness:  
**1<sup>1</sup>/<sub>16</sub> - 8 inches**

Maximum Force:  
**0.3-5.5 tons**



### Adjustable Reach-on ATM-3

The highly adjustable reach of the wing, the reversible lift hook and manual




torque wrench **TW-22** (3/8" drive) allow precise alignment.



### ATM-5 Including Hydraulics

Including 10,000 psi hydraulics: RC-53 single-acting cylinder, P-142 two-speed hand pump and 6 ft. long safety hose (HC-7206C).

All dimensions shown in inches.

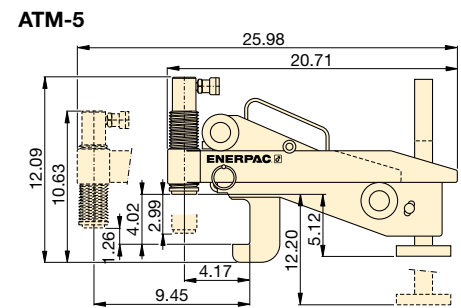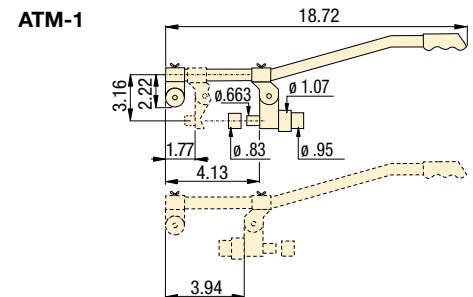

▼ The Enerpac ATM-3 used to align a large ANSI flange.



Maximum Lifting Force (ton)	Model Number	Bolt Hole Range		Flange Wall Thickness		Weight (lbs)
		(in)	(mm)	(in)	(mm)	
0.3	ATM-1	11/16 - 11/8	17 - 27,2	11/16 - 2	17 - 50	4.4
3.3	ATM-3	1 - 2 1/8	25 - 54	1 3/16 - 4 1/2	30 - 115	21.4
5.5	ATM-5 *	≥ 1 1/4	≥ 31,5	3 1/8 - 8	80 - 203	35.7

\* At 10,000 psi maximum operating pressure.

ATM-5 weight including hydraulic cylinder. Total set weight 62 lbs.

# Hydraulic and Mechanical Industrial Spreaders

▼ Shown: FSH-14 and FSM-8 with safety blocks SB1



- **Integrated wedge concept:** friction-free, smooth, parallel wedge movement eliminates flange damage and spreading arm failure
- **Unique interlocking wedge design:** no first step bending and risk of slipping out of joint
- **Requires very small access gap of only .24 in. (6 mm)**
- **Stepped spreader arm design:** each step can spread under full load
- **Few moving parts means durability and low maintenance**
- **Safety block SB-1 and ratchet spanner SW-22 included with FSM-8**
- **Safety block and Enerpac RC-102 cylinder included with FSH-14**

## FSM/FSH Series

Tip Clearance / Maximum Spread\*:  
**0.24/3.16 inches**


Maximum Spread Force:  
**8-14 tons**

Maximum Operating Pressure:  
**10,000 psi (FSH-14)**



### Stepped Blocks FSB-1

Use this pair of stepped blocks to increase wedge opening up to 3.16 in. (81 mm). Fits both FSH-14 and FSM-8.




### Flange Spreader Sets

Hydraulic FSH-14 is available as a set (pump, tool, gauge, adaptor and hose).

Set Model Number	Set Includes:	
STF-14H	FSH-14	GA-2
	P-392	GP-10S
	HC-7206	-

▼ Two FSH-14 spreaders used simultaneously with Enerpac handpump, hoses and AM-21 split-flow manifold.

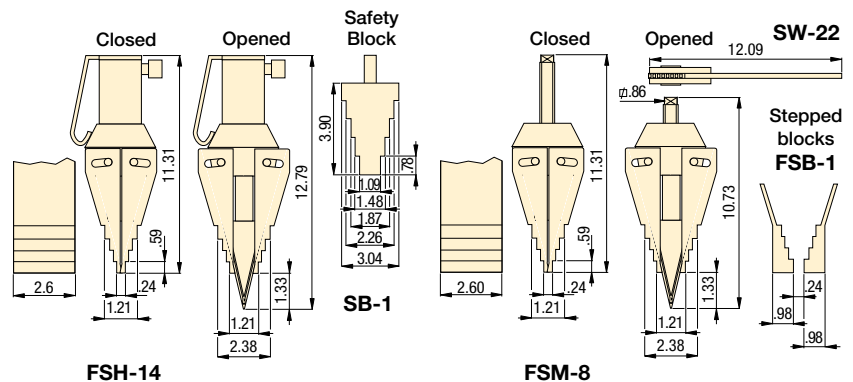

Max. Spreading Force (ton)	Model Number	Tip Clearance (in)	Max. Spread* (in)	Type	Oil Capacity (in <sup>3</sup> )	Weight (lbs)
8	FSM-8	.24	3.16	Mechanical	-	14.3
14	FSH-14	.24	3.16	Hydraulic	4.76	15.7

\* Using stepped blocks FSB-1.

# Pin Type Hydraulic Flange Spreaders

▼ Shown: FS-56




- Lightweight, ergonomic design for ease of use
- Adjustable jaw widths from 2.75" to 8.50" for a wide range of applications
- Single-acting, spring return RC Series cylinders for fast trouble-free operation

## FS Series



Capacity:  
**5-10 tons**

Maximum Operating Pressure:  
**10,000 psi**

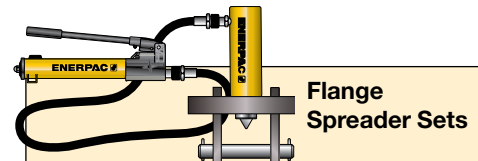

### Flange Spreader Sets

Both Hydraulic Flange Spreaders are available as sets (includes pump, tool, gauge, adaptor and hose).


Set Model Number	Spreader Model Number	Pump Model Number
STF-56H	FS-56	P-142
STF-109H	FS-109	P-392
STF-109A	FS-109	PATG-1102N



### Wedge Spreaders

Friction-free, smooth and parallel wedge movement with unique interlock wedge design. Eliminates flange damage and risk of spreading arm failure.

Page: 219

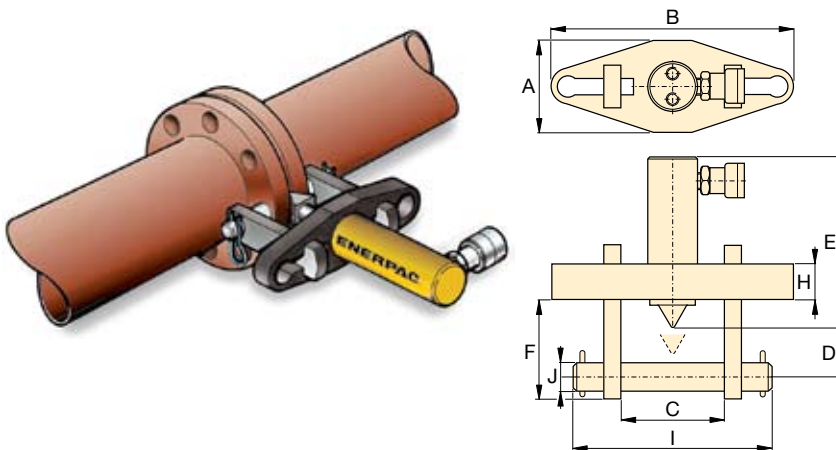

### Flange Spreader Matching Chart

ASA Rating (psi)	Pipe Size (in)	
	FS-56	FS-109
150	5-20	22-42
300	2.50-14	16-28
400	2.50-12	14-24
500	2.50-10	12-20
900	.50-6	8-16
1500	.50-3.50	4-8
2500	.50-2.50	3-4

Maximum Flange Thickness (in)	Stud Size (in)	Standard Wedge (in)	Cap. (ton)	Stroke (in)	Oil Cap. (in <sup>3</sup> )	Model Number	Dimensions (in)										Weight (lbs)
							A	B	C		D	E	F	H	I	J	
									Min.	Max.							
2 x 2.25	.75-1.13	.13-1.13	5	1.50	1.50	FS-56	3.00	8.25	2.75	6.10	1.28	7.71	3.45	1.00	8.10	.75	26
2 x 3.63	1.25-1.63	.13-1.13	10	2.13	4.80	FS-109	4.25	11.00	4.10	8.50	1.98	6.00	4.50	1.50	10.75	1.25	40

# Hydraulic Nut Cutters

▼ Shown from left to right: **NC-3241, NC-1319, NC-1924**



- Compact and ergonomic design, easy to use
- Unique angled head allows flush access
- Single-acting, spring return cylinder
- Heavy-duty chisels can be reground
- Applications include servicing trucks, piping industry, tank cleaning, petrochemical, steel construction and mining

## NC Series



Capacity:  
**5-90 tons**


Hexagon Nut Range:  
**0.5-2.88 inches**

Maximum Operating Pressure:  
**10,000 psi**



### Enerpac Nut Cutters

Nut Cutters include a spare chisel, a spare set screw and the wrench used to secure the chisel. A CR-400 coupler is standard.




### Nut Cutter Sets

Hydraulic Nut Cutters are available as sets (pump, tool, gauge, adaptor and hose).

Set Model Number	Splitter Model Number	Pump Model Number
STN-1924H	NC-1924	P-392
STN-2432H	NC-2432	P-392
STN-3241H	NC-3241	P-392



◀ Easily removing rusty nuts during railroad construction is just one of many application examples for the Enerpac Nut Cutters.

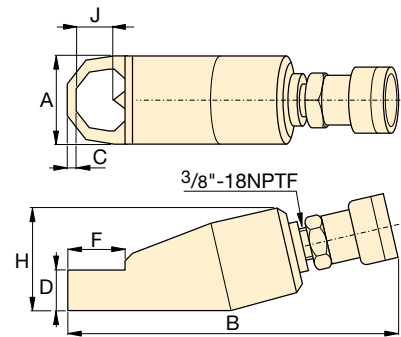

Hexagon Nut Range (in)	Bolt Range (in)	Capacity (ton)	Oil Capacity (in <sup>3</sup> )	Model Number	Dimensions (in)							Weight (lbs)	Replacement Chisel Model Number
					A	B	C	D	F	H	J		
.50-.75	.31-.50	5	.92	NC-1319	1.57	7.87	.24	.75	1.10	1.89	.83	1.8	NCB-1319
.75-.94	.50-.63	10	1.22	NC-1924	2.17	8.94	.32	.98	1.50	2.80	1.00	4.4	NCB-1924
.94-1.13	.63-.88	15	3.66	NC-2432	2.60	10.24	.39	1.22	1.93	2.99	1.30	6.6	NCB-2432
1.13-1.56	.88-1.13	20	4.88	NC-3241	2.95	11.26	.59	1.38	2.60	3.50	1.69	9.7	NCB-3241
1.56-2.00	1.13-1.38	35	9.46	NC-4150	3.78	12.80	.83	1.77	2.87	4.29	2.13	18.0	NCB-4150
2.00-2.25	1.38-1.50	50	14.64	NC-5060	4.17	14.41	1.06	2.13	3.63	4.96	2.38	26.0	NCB-5060
2.38-2.88	1.50-1.88	90	30.00	NC-6075	6.14	14.43	1.06	2.95	4.33	7.09	3.07	75.1	NCB-6075

Ordering Notes: Maximum allowable hardness to split is HRc-44. Not to be used on square nuts. Larger sizes available upon request.

▼ Shown: NS Hydraulic Nut Splitters



- Specially designed to suit standard ANSI B16.5 / BS1560 flanges
- Single-acting, spring return cylinder
- Tri-blade technology provides three cutting surfaces on a single blade
- Interchangeable heads provide maximum nut range flexibility
- Preset scale allows controlled blade extension, which avoids damage to bolt threads
- Grip tape and handle included for more secure maneuverability
- Nickel-plated cylinder body for excellent corrosion protection and improved durability in harsh environments
- Internal Pressure Relief Valve for overload protection

## Power and Precision

### High Performance Nut Splitter



#### Hydraulic Nut Cutters

The NC-Series models are available featuring an angle-head design for 0.50"-2.88" hexagon nuts.

Page: 221



#### FS-Series Spreaders

FS-Series Flange Spreaders provide quick and easy joint separation using hydraulic or mechanical force.

Page: 220



#### ATM Flange Alignment Tools

The ATM series provides safe high-precision flange alignment tools that fit most commonly used ANSI, API, BS, and DIN flanges.

Page: 218



◀ Heavily corroded and weathered nuts are quickly split and removed using an NS-Series Nutsplitter.



# Hydraulic Nut Splitters



### Nut Splitter Sets

To provide maximum flexibility, NS-Series Nut Splitters can also be ordered in sets (NS-xxxSy).

Select Nut Splitter size and pump style from the chart below.

To order additional Cutting Heads (NSH-xxxxxx), Cylinders (NSC-xxx) or Replacement Blades (NSB-xxx), see Selection Chart below.

### SET SELECTION:

- 1 Select your Nut Splitter
- 2 Select your pump type

## NS Series




Capacity:  
**103.2-192.5 tons**

Hexagon Nut Range:  
**2.75-5.38 inches**

Maximum Operating Pressure:  
**10,000 psi**

Available Set Model Number	Nut Splitter Model Number	Pump Options			Accessories Included			
		Hand Pump Model No.	Air Pump Model No.	Electric Pump Model No.	Gauge Block Model No.	Gauge Model No.	Hose Model No.	Storage Case Model No.
NS-70105SH	NS-70105	P392	-	-	GA-2	GP-10S	HC-7206	CM-4
NS-70105SA	NS-70105	-	XA-11G	-	-	integrated*	HC-7206	CM-4
NS-70105SE	NS-70105	-	-	PUD-1100B	GA-2	GP-10S	HC-7206	CM-7
NS-110130SH	NS-110130	P802	-	-	GA-2	GP-10S	HC-7206	CM-4
NS-110130SA	NS-110130	-	XA-11G	-	-	integrated*	HC-7206	CM-4
NS-110130SE	NS-110130	-	-	PUD-1100B	GA-2	GP-10S	HC-7206	CM-7

\*XA-11G air pump features an integrated pressure gauge.

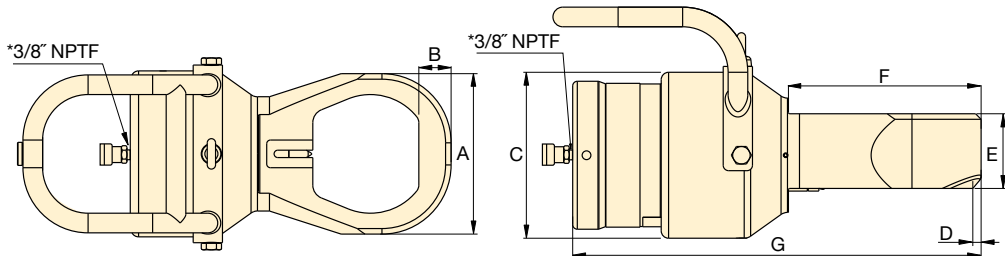

\*Fitted with CR400

### SELECTION CHART

Hexagon Nut Range** (in)	Bolt Range (in)	Cap. (ton)	Oil Cap. (in <sup>3</sup> )	Model Number*	Dimensions (in)							Weight (lbs)	NS Cylinder	NS Cutting Head	Replacement Blade
					A	B	C	D	E	F	G				
2.75-3.13	1.75-2.00	103.2	23.0	NS-7080	5.2	1.1	7.1	0.3	3.2	7.3	16.2	81.4	NSC-70	NSH-7080	NSB-70
2.75-3.50	1.75-2.25	103.2	23.0	NS-7085	5.7	1.2	7.1	0.3	3.2	7.7	16.6	82.7	NSC-70	NSH-7085	NSB-70
2.75-3.88	1.75-2.50	103.2	23.0	NS-7095	6.3	1.3	7.1	0.3	3.2	7.9	17	84.9	NSC-70	NSH-7095	NSB-70
2.75-4.25	1.75-2.75	103.2	23.0	NS-70105	6.9	1.4	7.1	0.4	3.2	8.2	17.5	87.1	NSC-70	NSH-70105	NSB-70
4.25-4.63	2.75-3.00	192.5	50.0	NS-110115	7.4	1.4	9.2	0.1	4.4	9.2	18.6	151.6	NSC-110	NSH-110115	NSB-110
4.25-5.38	2.75-3.50	192.5	50.0	NS-110130	8.6	1.6	9.2	0.1	4.4	9.5	19.4	158.3	NSC-110	NSH-110130	NSB-110

\* NS-Series Nut Splitters ship in two cases: One containing the NSC Cylinder and one containing the NSH Cutting Head. Assembly required.


\*\* Maximum allowable hardness to split is HRC-44.

With more than 50 years supporting industrial markets, Enerpac has gained the unique and in-depth expertise that is respected by industrial professionals around the world. Across every continent, Enerpac's network of application engineers, authorized distributors and technical service centers can reach any location, and deliver innovative solutions, technical assistance and quality products.






Enerpac's complete line of standard and customized products and a unique systems approach offers the benefits of safety and efficiency to applications where high forces are required. Whether constructing a signature bridge across a deep valley, lifting a national landmark for seismic retrofit or simultaneously testing hundreds of foundation pilings to support a new building, Enerpac will supply the high-force solutions to get the job done.

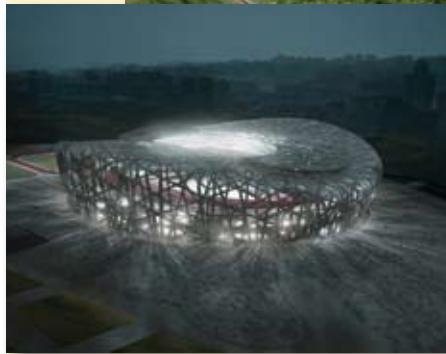

Courtesy of Calltrans




# Integrated Solutions Section Overview

Capacity (tons)	Capabilities	Series	Page
N/A	Synchronous Lift Systems	SLCG8 ESS	226 
42-1109	Strand Jacking Systems	TT	230 
50-200	Stage Lifting Systems	BLS	234 
70-125	Synchronous Hoist Systems	SHS	236 
.025-250	Uni-Lift® Actuators	M, B	238 



## Contact Enerpac!

Contact the Enerpac office nearest to you for advice and technical assistance in the layout of your ideal Lift System or visit us on the web: [www.enerpac.com](http://www.enerpac.com). You can also ask Enerpac for assistance by e-mail at [integratedsolutions@enerpac.com](mailto:integratedsolutions@enerpac.com).

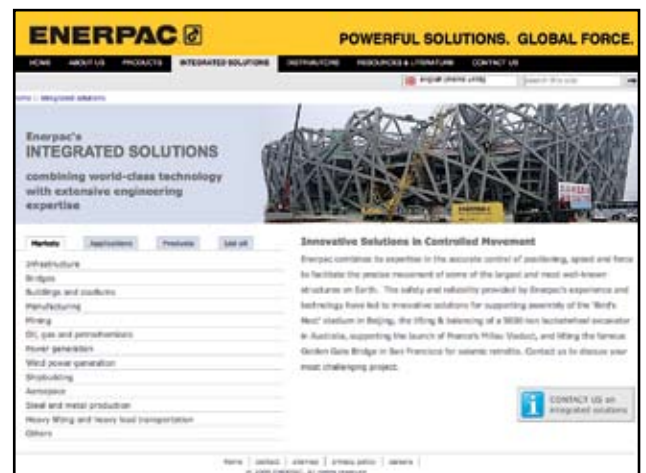

▼ Shown: SLCG-8, control valves, sensors and cylinders



## The Economical Solution for Up to 8 Point Synchronous Lifting

- Control up to 8 lifting points
- Stroke controlled movement for precise positioning
- Accuracy of 0.040" between leading and lagging cylinders
- Uses latest Programmable Logic Control (PLC) technology
- User friendly color touch screen
- Stroke alarms for optimal safety
- For use with standard single- or double-acting cylinders
- Uses standard 10,000 psi Enerpac pumps with electric directional control valve



### Heavy Lifting Cylinders

For a complete line of Enerpac cylinders, see the Cylinder Section of this catalog.

Page: **5**



### Accessory Valves

Controls for pressure and flow for optimum accuracy and safety.

Page: **132**



### Extension Cables (optional)

Used to extend cable lengths for valves and sensors.



### Pump Selection

The pump selection charts in the "Yellow Pages" section of the latest Industrial Tools Catalog will help you to determine the optimum hydraulic power source for your application.

Page: **242**



◀ Enerpac's PLC based Synchronous Lift Systems provide a solution for precise control of multiple lift points, for safe and efficient load movement.

# Basic 2 to 8 Point Lift System



## Synchronous Lifting Applications

The Synchronous Lift system uses feedback from multiple sensors to control the lifting, lowering and positioning of any large, heavy or complex structure, regardless of weight distribution. Synchronous lifting reduces the risk of bending, twisting or tilting, due to uneven weight distribution or load-shifts between the lift points.

A PLC controller monitors each lift position stroke and optional load transducers located at each lift point. By varying the oil flow to each lift point, the system maintains very accurate positional control. This control maintains structural integrity and can increase the productivity and safety of the lift, by eliminating manual intervention in the event of a load-shift or other problem.

Programmable, failsafe monitoring and safety alarms include operating parameters and hydraulic conditions, such as oil-level and over-temperature. Programmable data recording and “differential-lift” options allow a load to be manipulated into a pre-set position.

## SLCG-8 Series



Number of Lift Points:

**2 to 8**


Maximum System Operating Pressure:

**10,000 psi**

Accuracy Over Full Stroke:

**Up to 0.040 inch**


Digital Controlled Synchronous Components – typical 4-point layout for single-acting cylinders

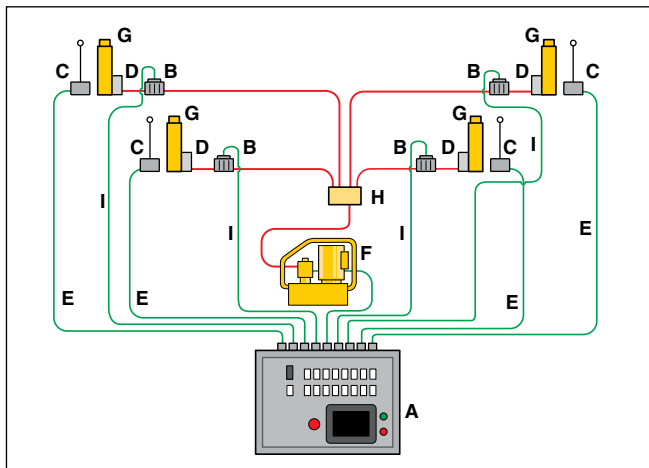

### System Components

- Controller
- Cylinder Control Valve
- Stroke Sensor
- Velocity Fuse/Check Valve
- Sensor Cable
- Hydraulic Pump
- Hydraulic Cylinder
- Manifold Block
- Control Valve Cable

Touch screen display for SLCG-8 Synchronous Lift Controller

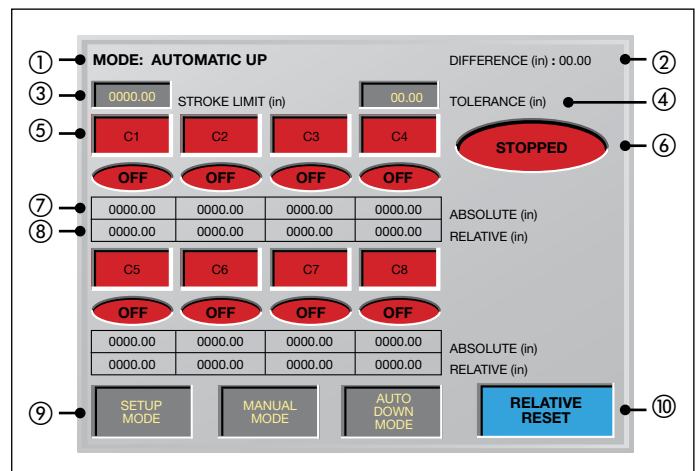

- ① Current Lifting Mode
- ② Cylinder Stroke Difference
- ③ Cylinder Stroke Limit
- ④ Cylinder Stroke Tolerance
- ⑤ Cylinder On/Off
- ⑥ System Status
- ⑦ Absolute Sensor Position
- ⑧ Relative Sensor Position
- ⑨ Operating Modes
- ⑩ Relative Position Reset

▼ Shown: 4-point ESS Standard Synchronous Lift System



## The Solution For Up to 12 Lifting Points With Load Control



### Typical Synchronous Lifting Applications

- Bridge lifting and repositioning
- Bridge launching
- Lifting and lowering of heavy equipment
- Leveling of existing structures and buildings
- Structural testing
- Lifting and weighing of oil platforms
- Tunnel jacking and pushing



### Contact Enerpac!

Contact the Enerpac office nearest to you for advice and technical assistance in the layout of your ideal Lift System. You can also ask Enerpac for assistance by e-mail at [integratedsolutions@enerpac.com](mailto:integratedsolutions@enerpac.com).



### Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 118



### Increase Control Capabilities

For increased control capabilities and options contact the Enerpac office nearest to you for advice.

- Control up to 12 lifting points
- Stroke and load controlled movement for positioning and weighing
- Accuracy of 0.040" between leading and lagging cylinders
- Data storage and recording capabilities
- Load and stroke alarms for optimal safety
- For use with standard single- or double-acting cylinders
- Integrated 10,000 psi hydraulic pump and controls

▼ Lifting a 3500 ton dragline was successfully done with an Enerpac synchronous lifting system. This operation provided for exact alignment of the bearing on the rail.



# Standard 2 to 12 Point Lift Systems



## Synchronous Lifting Applications

The Synchronous Lift system uses feedback from multiple sensors to control the lifting, lowering and positioning of any large, heavy or complex structure, regardless of weight distribution. Synchronous lifting reduces the risk of bending, twisting or tilting, due to uneven weight distribution or load-shifts between the lift points.

A PLC controller monitors each lift position stroke and optional load transducers located at each lift point. By varying the oil flow to each lift point, the system maintains very accurate positional control. This control maintains structural integrity and can increase the productivity and safety of the lift, by eliminating manual intervention in the event of a load-shift or other problem.

Programmable and failsafe monitoring and safety alarms include operating parameters and hydraulic conditions, such as oil-level and over-temperature. Programmable data recording and “differential-lift” options allow a load to be manipulated into a pre-set position.

## ESS Series



Number of Lift Points:

**2 to 12**


Maximum System Operating Pressure:

**10,000 psi**

Accuracy Over Full Stroke:


**Up to 0.040"**

Touch screen display for ESS Synchronous Lift Controller

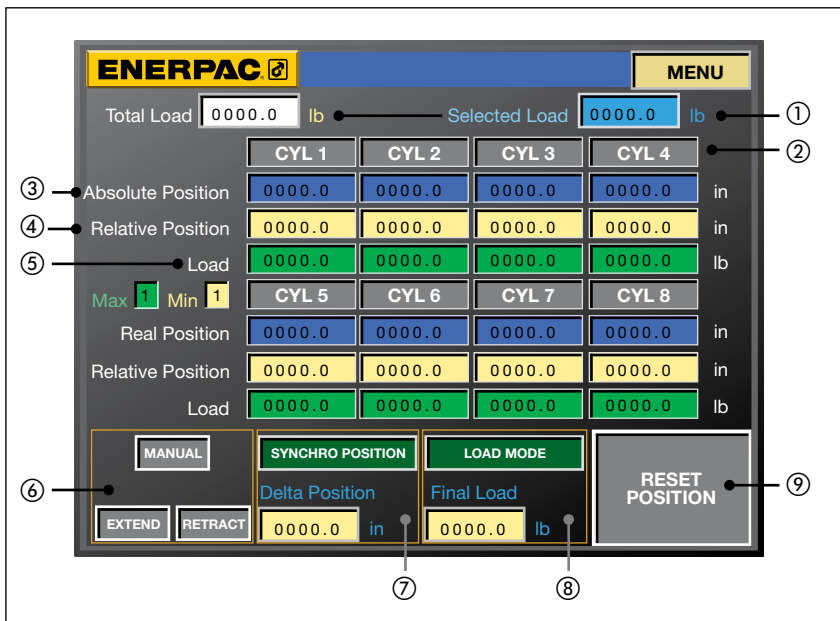

- ① Load Readings
- ② Cylinder On/Off
- ③ Absolute Sensor Position
- ④ Relative Sensor Position
- ⑤ Individual Load Readings
- ⑥ Manual Controls
- ⑦ Stroke Controls
- ⑧ Load Controls
- ⑨ Relative Position Reset

Typical layout for a 4-point synchronous lifting system

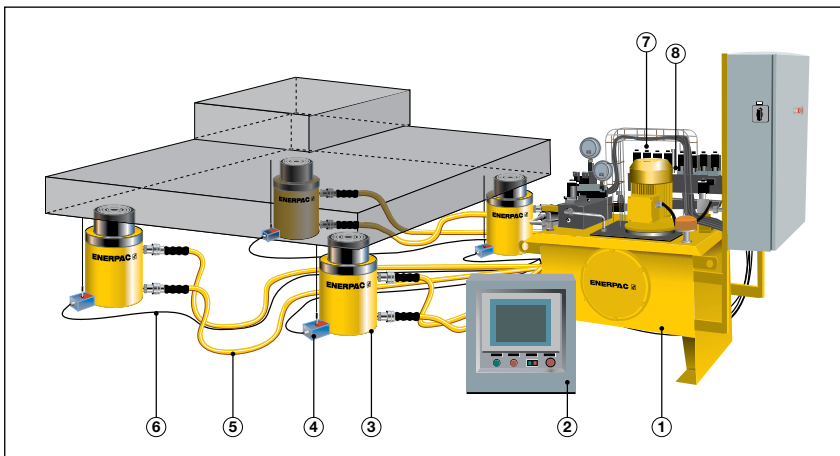

- ① Hydraulic Pump
- ② PLC-Control with Touch Screen
- ③ Hydraulic Cylinders
- ④ Stroke Sensors
- ⑤ Hydraulic Hoses
- ⑥ Sensor Cables
- ⑦ Solenoid Control Valves
- ⑧ Pressure Transducer

▼ Shown: 96-ton jack



## From the Leader in Heavy Lifting Technology



### Lifting in Unusual Situations

When loads need to be lifted or lowered in tight areas or in situations where overhead clearance is limited, Enerpac offers this economical alternative to traditional rigging equipment.

- Hydraulic wedge setting and wedge release for positive load control
- Individual strand guidance through jack for strand control
- Multi functional coating for corrosion protection, and trouble-free wedge release
- Jacks designed to be operative in all positions: vertical, horizontal or angled
- Strand jack designed according to the highest safety standards with a minimum of 2.5:1 of strand breaking load
- Built-in sensors for closed-loop control
- High Alloy CrMo steel for maximum durability



### Pre-stress Cap

Included with all strand jacks. Used for tensioning strand prior to operation.



### Strand Wedges

Specially designed wedges for use with Enerpac strand jacks are included and available to purchase separately.




### Lifting Attachments

A variety of lifting attachments are available for connecting strand to the load.

▼ Lifting bridge deck sections 100 feet was problematic and time consuming using traditional lifting methods. Eighty-five ton strand jacks were used to lift efficiently and safely.






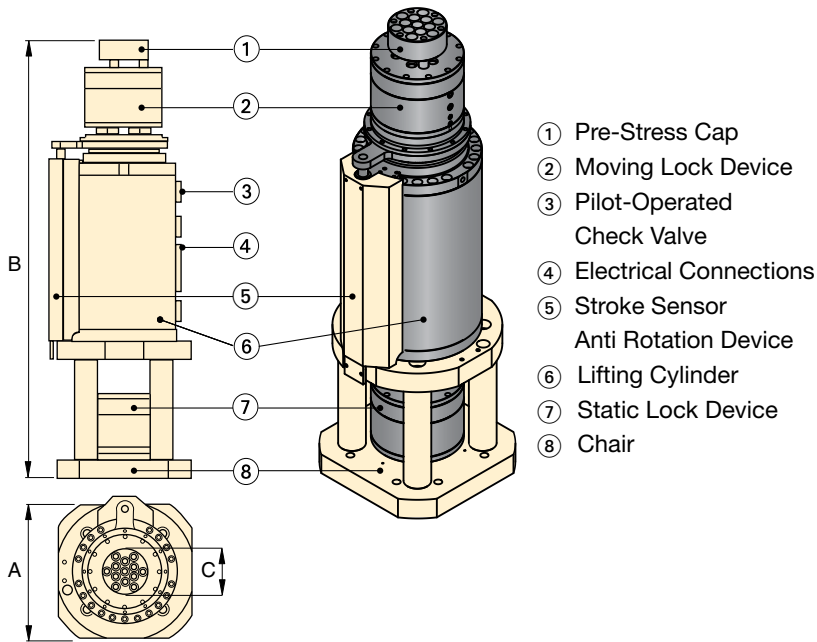

- ① Pre-Stress Cap
- ② Moving Lock Device
- ③ Pilot-Operated Check Valve
- ④ Electrical Connections
- ⑤ Stroke Sensor
- ⑥ Anti Rotation Device
- ⑦ Lifting Cylinder
- ⑧ Static Lock Device
- ⑧ Chair

## Strand Jacking Lifting Sequence

The sequence of operation is illustrated with the lock devices shown in *red* when the wedges are closed. The lock devices are shown in *blue* when the wedges are open.

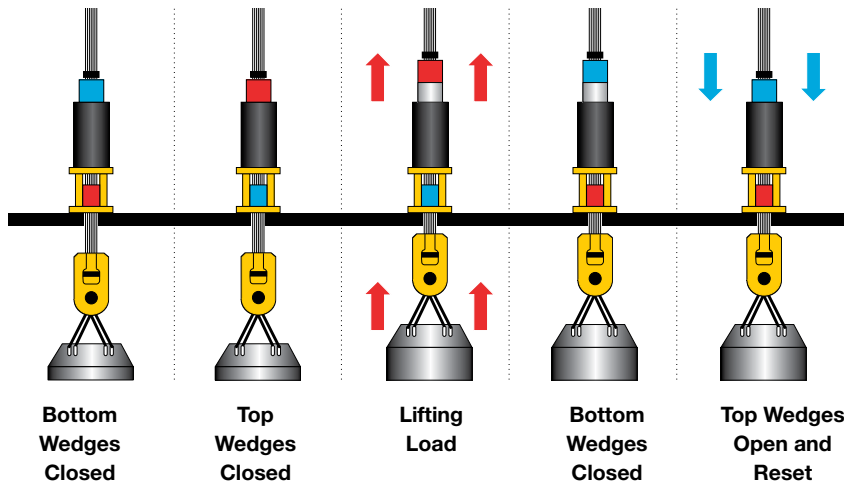

Strand Jack Capacity	Strand Diameter	Number of Strands	Effective Area	Square Base	Retracted Height	Strand Circle Diameter
(ton <sup>1)</sup> )	(in)		(in <sup>2</sup> )	A (in)	B (in)	C (in)
42	0.6	3	19.1	11.8	68.1	2.4
96	0.6	7	44.5	16.9	69.5	3.7
157	0.6	12	72.2	19.3	69.5	5.2
254	0.6	19	116.9	23.6	70.5	6.7
367	0.6	27	168.8	25.6	70.5	8.2
500	0.6	37	230.3	27.6	80.3	9.7
628	0.6	48	289.1	29.9	81.5	11.2
741	0.6	55	340.8	35.4	81.5	11.5
1109	0.7	61	510.1	40.9	89.0	15.9

<sup>1)</sup> All strand jack models are also available to operate with 0.7 inch (18 mm) strands upon request.

<sup>2)</sup> Detailed strand jack data sheets are available upon request.

\* If used with compact strand.

## TT Series



Rated Capacity per Jack:

**42-1109 ton**

Effective Stroke:

**19.7 inches**

Working Pressure:

**4350 psi**



### Strand

Strand Jacks are designed for use with 0.60 or 0.70 inch diameter heavy lifting strand (sold separately).



### ST120M06 Strand Lifting Jack

For heavy-lifting applications where a crane or hoist will not fit, the **ST120M06** may be the only solution. Contact Enerpac Integrated-Solutions for more details on this unique lifting solution.



### PLC Control Unit

Using a network cable to interconnect each strand jack pump to the master control enables the use of an unlimited number of jacks.



### Contact Enerpac!

Contact the Enerpac office nearest to you for advice and technical assistance in the layout of your ideal Lift System. You can also ask Enerpac for assistance by e-mail at [integratedsolutions@enerpac.com](mailto:integratedsolutions@enerpac.com).

▼ Shown: Hydraulic Strand Jack Pump



## Hydraulic Power for Demanding Strand Jacking Applications

Motor Size:

**2-100 hp**

Lifting Speed:

**6-80 ft/hr**

Working Pressure:

**4350 psi**

- Multiple pump sizes to achieve desired Jack-Pump performance
- PLC-controlled operation
- Fully enclosed cabinet
- One pump per strand jack allows for short connections
- Includes electrical oil level and temperature switch
- Includes return-line filter with electrical clog indicator

### Premium Options:

- Variable frequency drive for flow control and accurate synchronization between multiple lifting points
- Oil cooler for operation in high temperature environments or continuous operation
- Reinforced cabinet with steel frame and lifting lugs
- Different reservoir sizes
- Sound isolation
- Oil pre-heater in low temperature applications
- Biodegradable oil



### Hand Pendant

Allows individual control of strand jacks for set-up and manual operation. Included with each pump unit.



### Contact Enerpac!

Contact the Enerpac office nearest to you for advice and technical assistance in the layout of your ideal Lift System. You can also ask Enerpac for assistance by e-mail at [integratedsolutions@enerpac.com](mailto:integratedsolutions@enerpac.com).

Two concrete arches of this viaduct in Silleda, Spain are moved towards each other by Enerpac Heavy Lifting Strand Jacking Systems. ▶



▼ Shown: Master PLC Control Unit



## Control Multiple Strand Jacks from One Master Controller




### Controlling Network

By using a network cable to interconnect each strand jack pump, multiple strand jacks can be operated from one master controller.

- Modular based system
- Control up to 32-points with one controller
- Multiple controllers can be networked
- Synchronous stroke control maintains .040 inch accuracy between leading and lagging jacks
- Individual stroke and load readouts
- Stroke and load alarms for safety
- Data logging capabilities
- Alarm button monitors many types of system failures

▼ Illustration of how multiple units are networked together and controlled from a single location

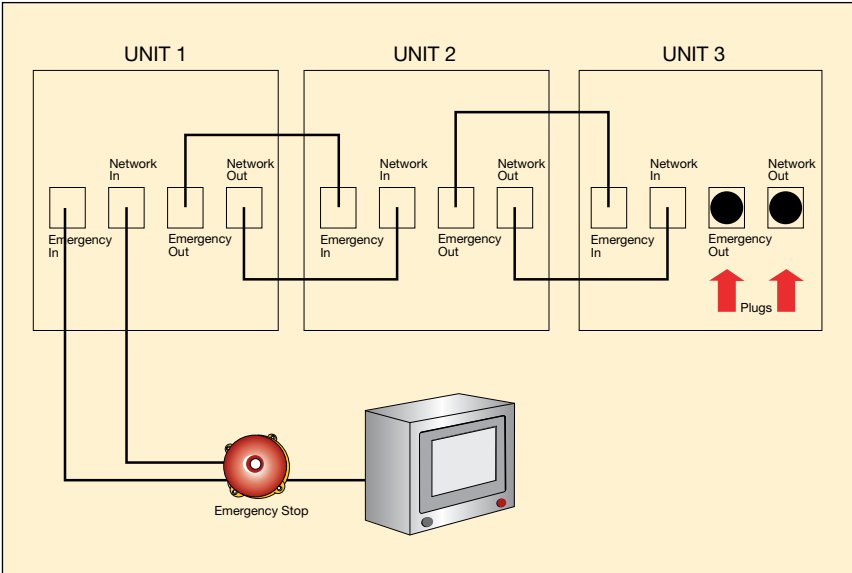

▼ Two 96-ton strand jacks used for bridge construction.




▼ Shown: BLS-506 in three lifting positions.



- Double-acting cylinder with solid plunger design
- Simple three-stage operation
- Swivel saddle and large support attachments for stability
- Anti-rotation device
- Built-in overload protection

▼ Typical stage-lift application using a custom built Enerpac system to lift the 396-ton Akkerwinde wooden bridge in the Netherlands.

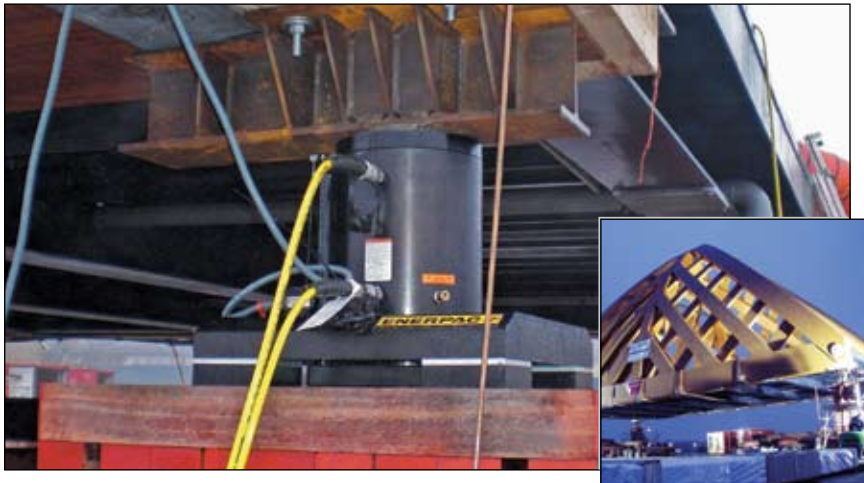

## A Simple Solution to Higher Lifting Jobs



### Lifting Height

Stage-lift cylinders overcome the usual limitation of lift height imposed by the cylinder's plunger stroke length.

Large objects, such as oil tanks, can be lifted, held and lowered for maintenance without sending for a crane.



### Synchronous Lift System

Multi-cylinder arrangements can be powered and fully synchronized by Enerpac's Synchronous Lift System.

Page: **228**

# Double Acting, Stage-Lift Cylinders



## Stage Lifting Application

For many lifting applications, the cylinder stroke can not be made long enough to lift the load to the required height. There is a direct relationship between the stroke length and the collapsed height of a cylinder. This relationship many times prevents a cylinder with the proper stroke length from also fitting in the required position to lift the load correctly. When these limitations are experienced, sometimes Stage-Lifting is the only solution.

Stage-Lifting is the process of lifting the load to the maximum stroke of the cylinder and then “cribbing” or holding, the load at this point. Once this is done and the load is secure, the cylinder is retracted, cribbing is then placed under the cylinder and then the cycle is repeated. This stage-lifting cycle allows the load to be lifted many times the stroke of the cylinder and total height is only limited by the strength and stability of the cribbing system.

The BLS-Series of cylinders feature attachments that facilitate the cribbing application, by providing reaction points for both the load and the piston cribbing reaction points.

## BLS Series



Capacity per lift point:


**50-200 tons**

Stroke per stage:


**6 inch**

Maximum Operating Pressure:


**10,000 psi**

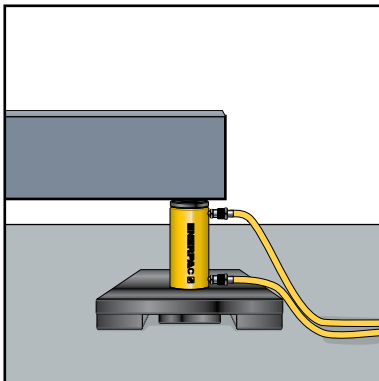


**1** The Stage Lift cylinder is placed on a solid support under the load (retracted plunger).

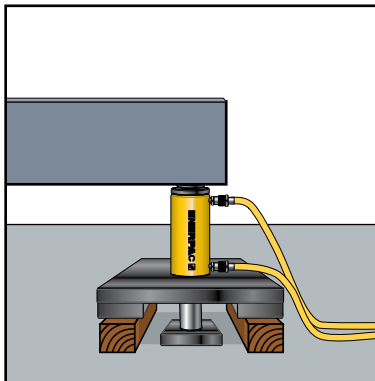

**2** Plunger extends, lifting the load and giving clearance to insert two outer blocks under the spreading plate.

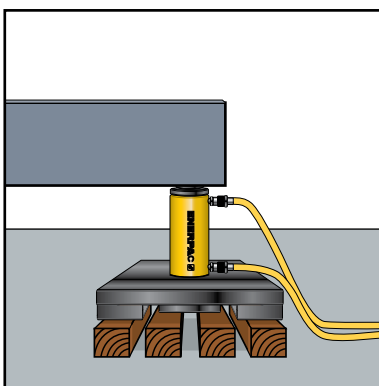

**3** Plunger retracts, giving clearance to position the central blocks which will support the plunger plate for the next extension.

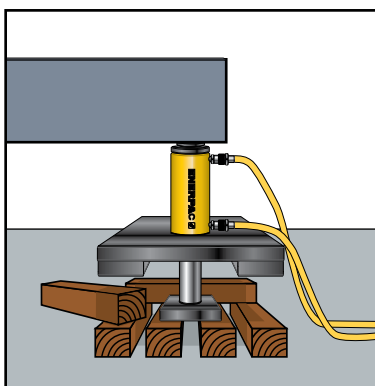

**4** Plunger extends, lifting the load and giving clearance to insert two new blocks, placed crosswise under the spreading plate.



### Think Safety

Manufacturer's rating of load and stroke are maximum safe limits.

Good practice encourages using only 80% of these ratings!

▼ 8 Point SyncHoist System featuring premium control package



- High precision vertical load maneuvering, with the use of one crane
- Reduces the risk of damage from oscillations due to sudden crane starts/stops
- Improves operating speed and worker safety
- Optional PLC controls for high accuracy hoisting and load positioning system
- 10,000 psi double-acting push/pull cylinders equipped with safety valve for protection in event of hose rupture or coupler damage

▼ An Enerpac SyncHoist system is used to place a 660 ton ship module, allowing the positioning to be done with only one crane.



## Accurate Hoisting and Load Positioning with a Crane



### Typical SyncHoist Functions and Applications

#### Functions

- High precision load positioning
- Pre-programmed positioning, tilting and aligning
- Counterweighing – determining center of gravity

#### Applications

- Positioning of roof sections, concrete elements, steel structures
- Positioning of turbines, transformers, fuel rods
- Precise machinery loading, mill rod changes, bearing changes
- Precise positioning of pipe lines, blow out valves
- Positioning and aligning of ship segments prior to assembly

See [www.enerpac.com](http://www.enerpac.com) and Enerpac in Action for more application information.



### Contact Enerpac!

Contact the Enerpac office nearest to you for advice and technical assistance in the layout of your ideal Lift System. You can also ask Enerpac for assistance by e-mail at [integratedsolutions@enerpac.com](mailto:integratedsolutions@enerpac.com).

# Synchronous Hoist High Precision Load Positioning

## Enerpac SyncHoist Systems

Cylinder Load Capacity: <sup>1)</sup>	70 ton	93 ton	125 ton
Stroke:	59 in.	59 in.	59 in.
Push force @ 1300 psi	15 ton	20 ton	28 ton
Pull force @ 10,000 psi	70 ton	93 ton	125 ton

## Pump Single-Stage

Oil flow at 10,000 psi:	240 in <sup>3</sup> /min	240 in <sup>3</sup> /min	240 in <sup>3</sup> /min
-------------------------	--------------------------	--------------------------	--------------------------

## Control Options and System Management <sup>2) 3)</sup>

Manual:	Joystick controls
Extended manual:	Joystick controls with position display
PLC-control:	Fully closed-loop control system

- 1) Total system capacity subject to angle and position of lifting cylinders.
- 2) Each cylinder equipped with safety valve for protection in event of hose/coupler damage.

Note: Enerpac SyncHoist comes standard with 4 lifting points. In the event more or fewer lifting points are required, contact your local Enerpac representative.

- 3) See chart below for detailed control features.

## SHS Series



Capacity per Lifting Point:

**70-125 tons**

Maximum Stroke:

**59 inches**

Accuracy Over Full Stroke:

**.040 in**

Maximum Operating Pressure:

**10,000 psi**



## Three Options for System Management and Control

Contact Enerpac for the following options.

### 1. Manual Control

- Plunger stroke control
- System warnings for
  - oil level, filter indication, thermal motor protection

### 2. Extended Manual Control

- Plunger stroke control
- Load & stroke display
- System warnings for
  - maximum cylinder load control setting
  - oil level, filter indication, thermal motor protection

### 3. PLC-control

- Touch screen control input
- Remote wireless radio control
- Load and stroke monitoring
- Load calculations (center of gravity)
- Pre-programmable motions and data recording
- System warnings for
  - maximum cylinder load control setting
  - stroke and position control
  - oil level, filter indication, thermal motor protection

▼ Roof lifting for the Auditorium at Tenerife in the Canary Islands – Spain. A 4-point Enerpac hydraulic SyncHoist system is used for accurate roof positioning.



▼ Shown: Mechanical Actuators



## Precision Positioning and Control in a Mechanical Package

- Machine screw versions up to 250 tons for low-cycle, high-load applications and positive load holding
- Ball-Screw versions up to 50 tons for high-cycle, high-speed applications
- Electro-Mechanical Drive System can be interlinked and easily synchronized
- Precision rolled load screws Class 3 fit for additional strength
- Preloaded tapered roller bearings tolerate high thrust loads and minimize side loading
- Precision machine gear sets provide minimum backlash while reducing wear
- Wide variety of base mounting and screw end configurations



### Maximize Your System Control

Custom control boxes designed to meet your specific application requirements.



### System Accessories


Enerpac offers a large array of motors, drive components, and boots to meet any demanding project.




◀ *Uni-Lift® Actuators were the ideal choice to position and adjust the complex scaffolding for aircraft maintenance. Precision movement and flexibility was an asset in getting the job done efficiently and safely.*



# Uni-Lift® Mechanical Actuators



**Ball Screw Cutaway**



**Machine Screw Cutaway**


## Design Features:

- Available with translating, rotating and keyed load screw designs
- High-strength rolled load screws provides maximum durability
- Rugged aluminum alloy and ductile iron housings for demanding or rigorous environment
- Corrosion resistant zinc plating is standard on most units
- The widest range options gear ratios are available to meet all application requirements
- Speeds up to 400 inches per minute

## Actuator Accessories:

- High-quality bellow boots for added loadscrew protection
- Easy mounting of optional screw ends are available in plain, top plate and clevis design
- Wide selection of motors and C-face adaptors
- Limit switches and encoders for complete system control
- Couplers and shafting available for individual system requirements
- A large choice of mitre gear boxes and reducers provide maximum system design flexibility
- Custom built control boxes to meet your specific need

## Typical Mechanical Actuator Set-Up

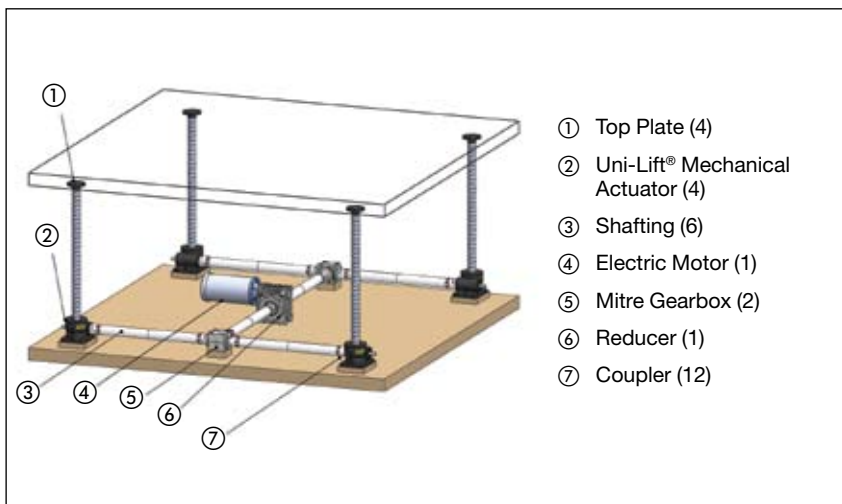

## B, M Series



Capacity:

**.25-250 tons**

Maximum Stroke:

**15-240 inches**

Types:

**Machine & Ball Screw**



Over-travel Stop Nuts provide a mechanical stop and are used to prevent the ejection of the power screw from the actuator.




### Contact Enerpac!

Contact the Enerpac office nearest to you for advice and technical assistance in the layout of your ideal Lift System. You can also ask Enerpac for assistance by e-mail at [integratedsolutions@enerpac.com](mailto:integratedsolutions@enerpac.com).



### CAD Modeling Software

Our experienced sales team and application engineers will deliver the precise support you need to meet the most demanding and unique requirements. State-of-the art CAD modeling software offers the needed flexibility to design custom built "special" screw jacks to suit all customer needs.



Engineers utilized two (2) Uni-Lift® 100-ton actuators with 15' of travel to raise and lower the ramp on each ferry dock along the Mississippi River, USA. The Department of Transportation engineers needed a way of lifting and lowering ramps during high and low tide conditions, while holding up to the harsh environmental conditions of the gulf coast.



When engineers needed a quick and compact way of opening the large doors of these large plating tanks, they contacted Uni-Lift® for help. This application utilizes two 5-ton double-clevis actuators, with a motor and a limit switch box mounted on each actuator. The operator just pushes a button to open the doors, and pushes another button to close them. This method greatly enhances operator safety and helps prevent cross contamination between tanks.

Uni-Lift® screw jacks are used extensively in a variety of material handling applications. Whether used in positioning conveyer belts, placing tension on overhead beams or moving heavy-duty equipment, Uni-Lift® actuators are the ideal solution for many jackings, tensionings, and positioning applications. Whether you have one lifting point or multiple lifting points, Uni-Lift® actuators are the perfect solution for many different OEM motion control applications.





## Enerpac “Yellow Pages” stand for Hydraulic Information!

If selecting hydraulic equipment is not your daily routine then you will appreciate these pages. The “Yellow Pages” are designed to help you work with hydraulics. They will help you to better understand the basics of hydraulics, of system set-ups and of the most commonly used hydraulic techniques. The better your choice of equipment, the better you will appreciate hydraulics. Take the time to go through these “Yellow Pages” and you will benefit even more from Enerpac High Pressure Hydraulics.

Section		Page
<b>Safety Instructions</b>		<b>242-243</b> ▶
<b>Product Selection Worksheet</b>		<b>245</b> ▶
<b>Basic System Set-ups</b>		<b>246-247</b> ▶
<b>Basic Hydraulics</b>		<b>248-249</b> ▶
<b>Conversion Tables and Speed Charts</b>		<b>250-251</b> ▶
<b>Valve Information</b>		<b>252</b> ▶
<b>Torque Tightening</b>		<b>253-254</b> ▶

### GLOBAL LIFETIME WARRANTY STATEMENT



[www.enerpac.com](http://www.enerpac.com)

Visit our web site for the complete Global Lifetime Warranty or call your Authorized Service Center.

Enerpac products are warranted to be free of defects in materials and workmanship. Any product that does not conform to specification will be repaired or replaced at Enerpac’s expense, anywhere in the world; simple as that!

This warranty does not cover ordinary wear and tear, abuse, misuse, alterations, or the use of improper fluids. Determination of the authenticity of a warranty claim will be made only by Enerpac or its Authorized Service Centers.

Enerpac is certified for several quality standards. These standards require compliance with standards for management, administration, product development and manufacturing.



Enerpac works hard to maintain the ISO 9001 quality rating, in its ongoing pursuit of excellence.

### CE Marking & Conformity

Enerpac provides Enerpac provides Declarations of Conformity, Declarations of Incorporation, and CE marking for products that conform to the European Community Directives.



Where specified, Enerpac electric power units meet the design, assembly and test requirements of The Standards Council of Canada (CAN C22.2 No. 68-92), and UL73 for the United States. Units were tested and certified for both USA and Canada by TUV, a nationally recognized testing laboratory.

### EMC Directive 2004/108/EC

Where specified, Enerpac electric power pumps meet the requirements for Electromagnetic Compatibility per EMC Directive 2004/108/EC.



The ZA-series pumps are tested and certified according to the Directive 94 / 9 / EC “ATEX Directive”. The explosion protection is for equipment group II, equipment category 2 (hazardous area zone 1), in gas and/or dust atmospheres. The ZA-series pumps are marked with: Ex II 2 GD ck T4.

### ASME B30.1–2004

Our cylinders fully comply with the criteria set forth by the American Society of Mechanical Engineers (except RD series).

### DIN 20024

Enerpac thermoplastic hoses are related to the criteria set forth in Deutsche Industrie Norm 20024.

### Product Design Criteria

All hydraulic components are designed and tested to be safe for use at maximum 10,000 psi unless otherwise specifically noted.



# Safety Instructions



- Lift slowly and check often
- Avoid standing in the line of force
- Anticipate possible problems and take steps to avoid them

When used correctly, hydraulic power is one of the safest methods of applying force to your work. To that end we offer some DO's and DON'Ts, simple common sense points which apply to practically all Enerpac hydraulic products.



The illustrations and application photos of Enerpac products throughout this catalog are used to portray how some

of our customers have used hydraulics in industry. In designing similar systems, care must be taken to select the proper components that provide safe operation and fit your needs. Check to see if all safety measures have been taken to avoid the risk of injury and property damage from your application or system. Enerpac cannot be held responsible for damage or injury caused by unsafe use, maintenance or application of its products.



Please contact the Enerpac office or a representative for guidance when you are in doubt as to the proper safety precautions to be taken in designing and setting up your particular system.

In addition to these tips, every Enerpac product comes with specific safety information and instructions. Please read them carefully.

## Jacks





◀ Provide a level and solid support for the entire jack base area.



◀ The entire jack saddle must be in contact with the load. Movement of the load must be in the same direction as jack plunger.





◀ Never place any part of your body under the load. Ensure the load is on a solid support before venturing under.





◀ Remove the jack handle when it is not being used.



## Cylinders




◀ Provide a solid support for the entire cylinder base area. Use cylinder base attachment for more stability.



◀ The entire cylinder saddle must be in contact with the load. Movement of the cylinder must be parallel with the movement of the load.





◀ Do not use cylinder without saddle. This will cause plunger to "mushroom". Saddles distribute load evenly on the plunger.



◀ As with jacks, never place any part of your body under the load. Load must be on cribbing before venturing under.



◀ Always protect cylinder threads for use with attachments.




◀ Keep hydraulic equipment away from open fire and temperatures above 150 °F (65 °C).





## General

**80%** Manufacturer's rating of load and stroke are maximum safe limits. **80%**  
**Good practice encourages using only 80% of these ratings!**


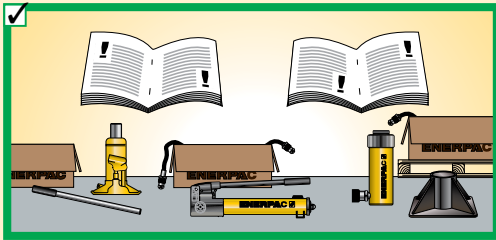


Always read instructions and safety warnings that come with your Enerpac hydraulic equipment.





Don't override the factory setting of relief valves. Always use a gauge to check system pressure.



## Pumps





Don't use handle extenders. Hand pumps should be easy to operate when used correctly.



Close release valve finger tight. Using force will ruin the valve.





Fill pump only to recommended level. Fill only when connected cylinder is fully retracted.





Use only genuine Enerpac hydraulic oil. The wrong fluid can destroy your seals and pump and will render your warranty null and void.



## Hoses and couplers





Clean both coupler parts before connecting. Use dust caps when coupler parts are not connected.





Detach cylinder only when fully retracted or use shut-off valves or safety valves to lock-in cylinder pressure.





Keep hoses away from the area beneath loads.



Don't kink hoses. Bending radius should be at least 4 1/2 inch. Don't drive over or drop heavy objects on hoses.







Don't lift hydraulic equipment by the hoses.



Never allow the cylinder to be lifted off of the ground through the couplers.








## ▼ HAND PUMP AND SINGLE-ACTING CYLINDER MATCHING CHART

Capacity (tons) ▶ ▼ Stroke (inches)	5	10	15	25	30	50	60	75	100	150
< 1.00										
1.00										
2.00										
3.00										
4.00										
5.00										
6.00										
7.00										
8.00										
9.00										
10.00										
12.00										
13.00										
14.00										
		<b>P-392</b>				<b>P-80</b>		<b>P-462</b>		
		Page: 62				Page: 64		Page: 64		

Note: Selection based on oil capacity requirements of cylinders.

## ▼ POWER PUMP SELECTION CHART

Flow*	Low (20 in <sup>3</sup> /min)		Medium (60 to 200 in <sup>3</sup> /min)		High (463 in <sup>3</sup> /min)
Reservoir Oil Capacity	0.5-1 gal.	1.5 gal.	1.0-10 gal.	1.0-10 gal.	25 gal.
Duty Cycle**	Intermittent	Extended	Intermittent	Extended	Extended
Portable/Stationary***	Portable	Stationary	Portable	Stationary	Stationary
Recommended Series	<b>Economy</b>	<b>Submerged</b>	<b>ZU4</b>	<b>ZE3-6</b>	<b>8000 Series</b>
					
	Page: 74	Page: 76	Page: 82	Page: 88	Page: 94

\* Flow

- Determined by motor size
- Directly affects electrical power requirements
- Determines cylinder or tool speed

\*\* Duty Cycle

- Extended applications require more than one hour of uninterrupted pump use
- Intermittent use – from 20 minutes to one hour, depending on reservoir capacity (contact Enerpac for details)

\*\*\* Portability

- |                               |                                  |
|-------------------------------|----------------------------------|
| <b>Portable</b>               | <b>Stationary</b>                |
| • Ergonomic handles           | • Mounting options               |
| • Flexible power requirements | • Normally requires stable power |

# Product Selection Worksheet



▼ Complete the following information to select the right products:

Cylinder Selection	Question:	Tips/help	Data	Model Number
	Total force required in tons:	Total load	<input type="text"/>	
	Number of cylinders required:	Number of lifting points	<input type="text"/>	
	Force per cylinder in tons:	Should be 80% of total cylinder cap.	<input type="text"/>	
	Stroke required:	Plunger travel	<input type="text"/>	
	Single or double acting (D/A):	D/A used when pull force is required, or retract speed is critical	<input type="text"/>	
	Type of plunger required:	Hollow or solid	<input type="text"/>	
	Collapsed height required:	Height with plunger fully retracted	<input type="text"/>	
	Optional saddle required:	Tilt, Grooved, Flat	<input type="text"/>	
	Cylinder base:	Improves stability	<input type="text"/>	
	Cylinder attachments: (RC-series)	Expanded functions	<input type="text"/>	
	Selected cylinder model:			<input type="text"/>
	Including coupler model:			<input type="text"/>

Pump Selection	Available power source:			
	<input type="checkbox"/> Manual	<input type="checkbox"/> Electric	<input type="checkbox"/> Compressed Air	<input type="checkbox"/> Gasoline
The three most commonly selected pumps are hand pumps, electric pumps and air-driven pumps. Gas powered pumps, however can be selected in the same way.	<u>Hand pump</u>	Not for high-cycle applications	<input type="text"/>	
	Single- or double-acting operation	Use 4-way valve for D/A applications	<input type="text"/>	
	Check speed chart on page 251 for number of strokes per inch)			
	Selected hand pump:			<input type="text"/>
	<u>Electric or compressed air pump</u>	Need for portability:	Weight and power requirements	<input type="text"/>
	Duty cycle:		Intermittent or extended	<input type="text"/>
	Required usable oil capacity:		Intermittent = 1.2 x cylinder oil capacity high cycle = 2 x cylinder oil capacity	<input type="text"/>
	Available voltage:		Single phase or Three phase	<input type="text"/>
	Lifting speed (Important/not important):	Use speed chart on page 251		
	Type of control:		Manual/remote pendant	<input type="text"/>
Type of actuation/function:		Advance/hold/retract	<input type="text"/>	
Accessories:		Roll bar, Oil Filter kit, ...	<input type="text"/>	
Selected pump:			<input type="text"/>	
To suit hose:		Oil connection	<input type="text"/>	


System Components	Number of hoses and length required:		
	Selected hoses:	<input type="text"/>	<input type="text"/>
	Manifold or tee:		<input type="text"/>
	Extra hose per manifold (2):		<input type="text"/>
	Gauge (psi, lbs or tons scale):	Glycerine for high cycle	<input type="text"/>
	Gauge adaptor:		<input type="text"/>
	Fittings:		<input type="text"/>
	Pressure relief safety valve:		<input type="text"/>
	Load-holding valve(s):		<input type="text"/>
	Hydraulic oil:		<input type="text"/>




- 1 Cylinder**  
Applies hydraulic force.  
Page 5
- 2 Cylinder Base Plate**  
For applications such as lifting where additional cylinder stability is required.  
Page 10
- 3 Pump**  
Provides hydraulic flow.  
Page 61
- 4 Hose**  
Transports hydraulic fluid.  
Page 118-119
- 5 Male Coupler**  
For quick connection of the hose to system components.  
Page 120-121
- 6 Female Coupler**  
For quick connection of the hose end to the system components.  
Page 120-121
- 7 Gauge**  
To monitor pressure of the hydraulic circuit.  
Page 124-127
- 8 Gauge Adaptor**  
For quick and easy gauge installation.  
Page 130
- 9 Swivel Connector**  
Allows proper alignment of valves and/or gauges. Used when units being connected cannot be rotated.  
Page 130
- 10 Auto-damper Valve V-10**  
Used to protect gauge from damage due to sudden pulses in the system. Needs no adjustment and allows correct positioning of gauge, prior to tightening.  
Page 133

**Single-acting push application, such as in a press.**  
The hand pump offers controlled cylinder advance, but may require many hand pump strokes in longer stroke applications when the cylinder capacity is 25 ton or above.


Examples of pump, hose and cylinder sets can be found on page 59.

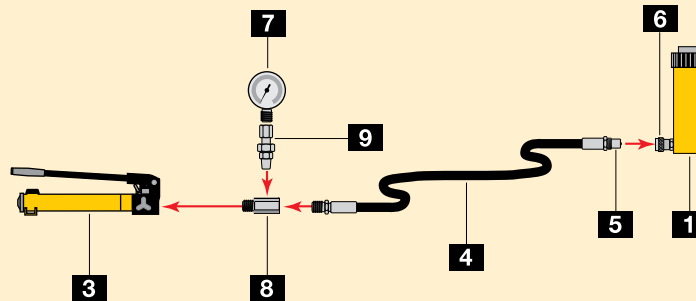

**Single-acting cylinder with longer stroke used for lifting applications.**

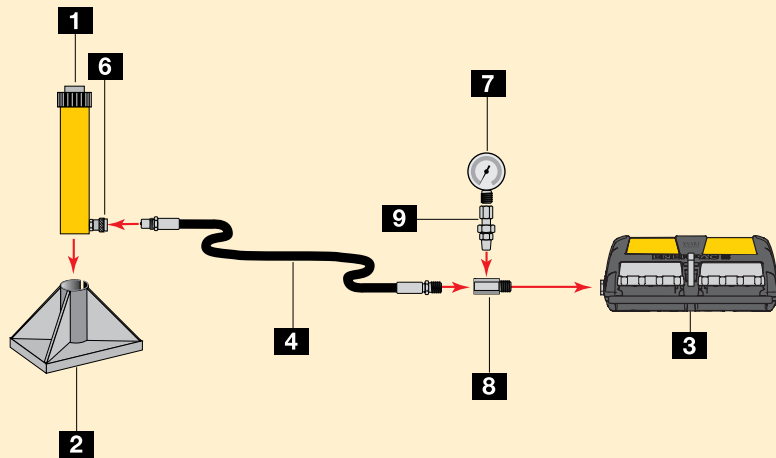


**Double-acting cylinder set-up used for lifting applications where a slow controlled descent of the load must be maintained.**

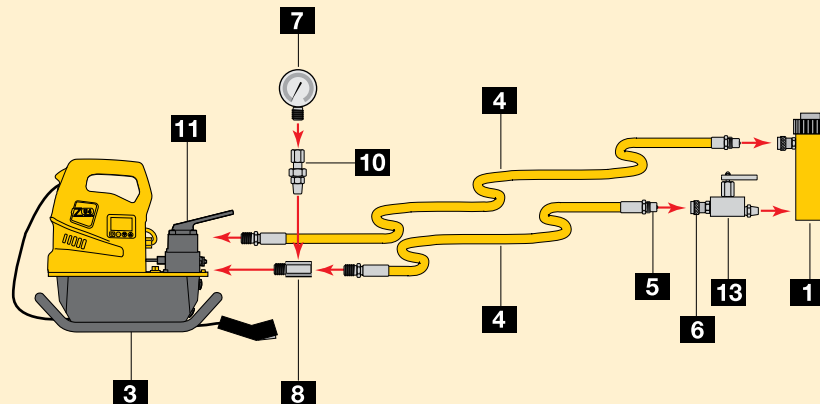





Double-acting cylinder set-up used in a push/pull application.

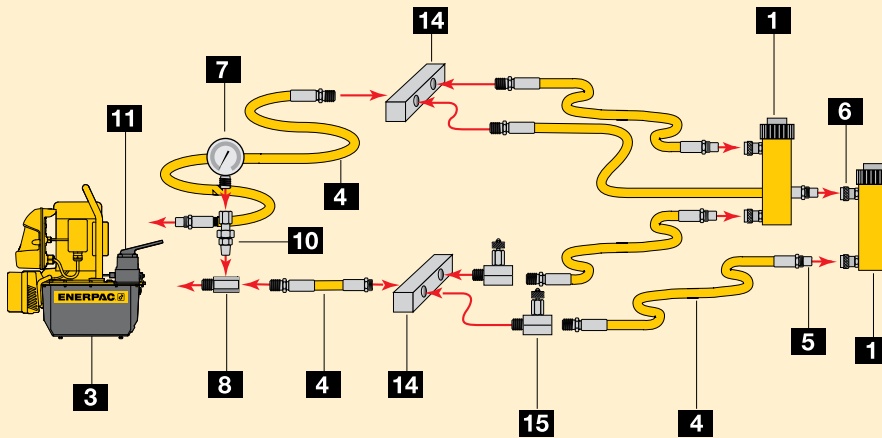

**11 4-Way Directional Control Valve**  
Controls the direction of hydraulic fluid in a double-acting system.  
Page 110


**12 3-Way Directional Control Valve**  
Controls the direction of hydraulic fluid in a single-acting system.  
Page 110


**13 Safety Holding Valve**  
Controls load descent in lifting applications.  
Page 133

**14 Manifold**  
Allows distribution of hydraulic fluid from one power source to several cylinders  
Page 122

**15 Needle Valve**  
Regulates the flow of hydraulic fluid to or from the cylinders.  
Page 133


Two point lifting set-up using single-acting cylinders.

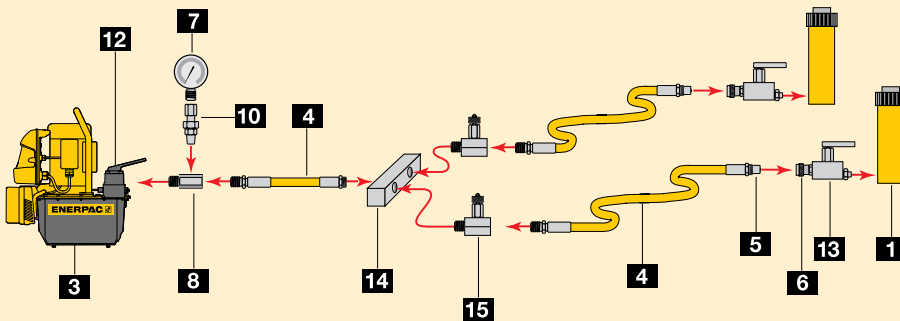



**www.enerpac.com**  
Visit our web site to learn more about hydraulics and system set-ups.


Four point lifting set-up, using single-acting cylinders, flow control valves and safety valves.

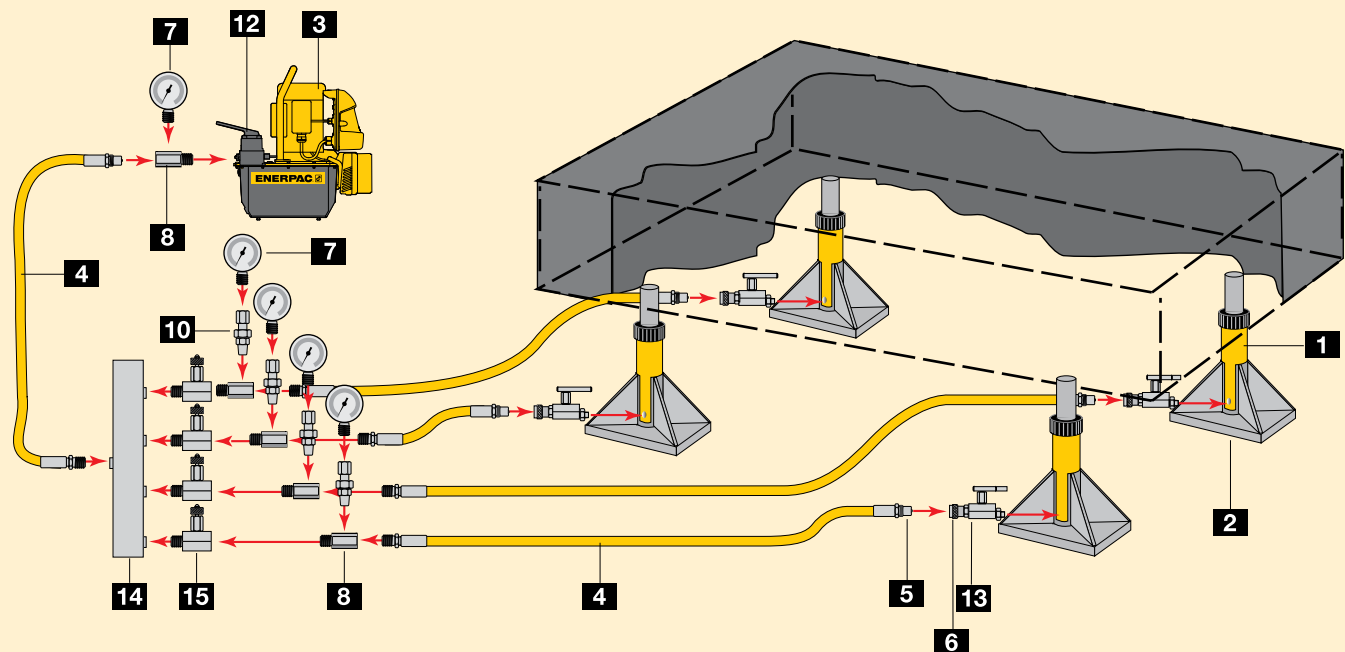




## Flow

A hydraulic pump produces flow



## Pressure

Pressure occurs when there is resistance to flow

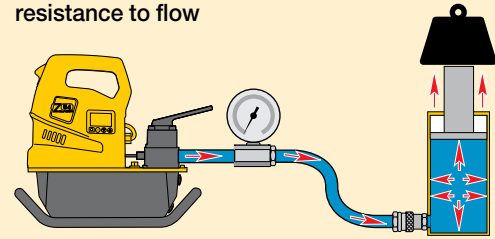

## Pascal's Law

Pressure applied at any point upon a confined liquid is transmitted undiminished in all directions (Fig.1). This means that when more than one hydraulic cylinder is being used, each cylinder will lift at its own rate, depending on the force required to move the load at that point (Fig. 2). Cylinders with the lightest load will move first, and cylinders with the heaviest load will move last (Load A), as long as the cylinders have the same capacity.





Figure 1

To have all cylinders operate uniformly so that the load is being lifted at the same rate at each point, either control valves (see Valve section) or Synchronous Lift System components (see Cylinder section) must be added to the system (Load B).

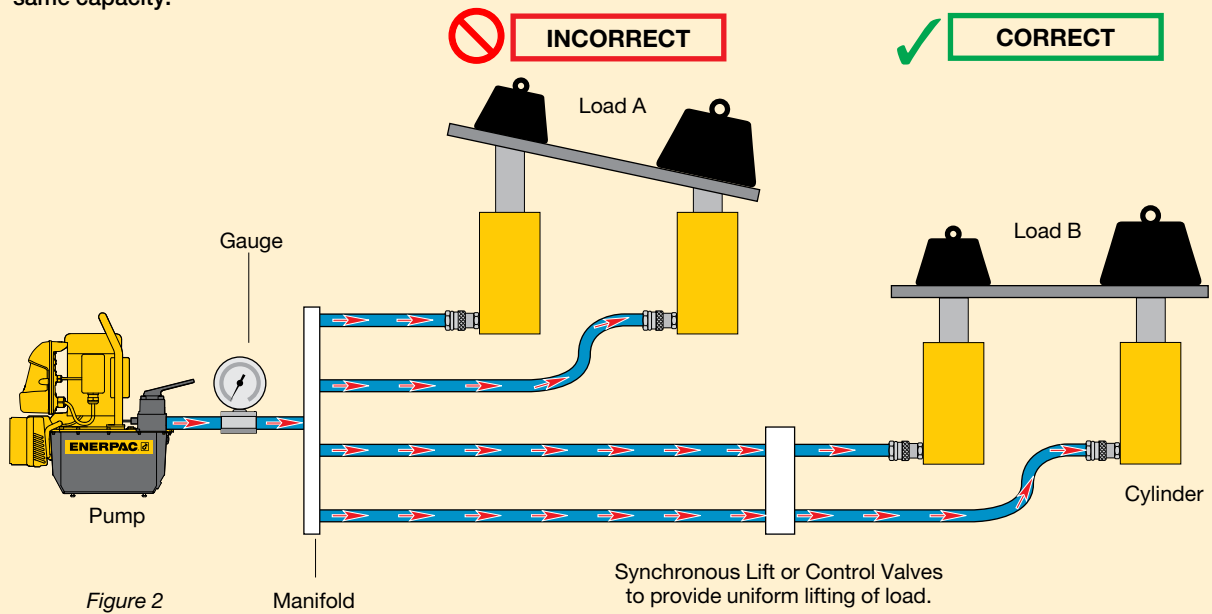

### CAUTION!

**When lifting or pressing, always use a gauge.**

A gauge is your "window" to the system. It lets you see what's going on. You will find the gauges in the System Components section.

Page: 117




**Learn more about hydraulics**

Visit [www.enerpac.com](http://www.enerpac.com) to learn more about hydraulics and system set-ups.



## Force

The amount of force a hydraulic cylinder can generate is equal to the hydraulic pressure times the “effective area” of the cylinder (see cylinder selection charts).



Force	=	Hydraulic Working Pressure	x	Cylinder Effective Area
F	=	P	x	A

Use this formula to determine either force, pressure or effective area if two of the variables are known.

### Example 1

An RC-106 cylinder with 2.24 in<sup>2</sup> effective area operating at 8,000 psi will generate what force?

$$\text{Force} = 8,000 \text{ psi} \times 2.24 \text{ in}^2 = 17,920 \text{ lbs.}$$

### Example 2

An RC-106 cylinder lifting 14,000 lbs will require what pressure?

$$\text{Pressure} = 14,000 \text{ lbs} \div 2.24 \text{ in}^2 = 6,250 \text{ psi.}$$

### Example 3

An RC-256 cylinder with 5.15 in<sup>2</sup> effective area is required to produce a force of 41,000 lbs. What pressure is required?

$$\text{Pressure} = 41,000 \text{ lbs.} \div 5.15 \text{ in}^2 = 7961 \text{ psi.}$$

### Example 4

Four RC-308 cylinders each with 6.49 in<sup>2</sup> effective area are required to produce a force of 180,000 lbs. What pressure is required?

$$\text{Pressure} = 180,000 \text{ lbs} \div (4 \times 6.49 \text{ in}^2) = 6933 \text{ psi.}$$

Remember, since four cylinders are used together, the area for one cylinder must be multiplied by the number of cylinders used.

### Example 5

A CLL-2506 cylinder with 56.79 in<sup>2</sup> effective area is going to be used with a power source that is capable of 7,500 psi. What is the theoretical force available from that cylinder?

$$\text{Force} = 7,500 \text{ psi} \times 56.79 \text{ in}^2 = 425,925 \text{ lbs.}$$

## Cylinder Oil Capacity


The volume of oil required for a cylinder (cylinder oil capacity) is equal to the effective area of the cylinder times the stroke\*.

Cylinder Oil Capacity	=	Cylinder Effective Area	x	Cylinder Stroke
-----------------------	---	-------------------------	---	-----------------

### Example 1

An RC-158 cylinder with 3.14 in<sup>2</sup> effective area and an 8 in. stroke will require what volume of oil?

$$\text{Oil Capacity} = 3.14 \text{ in}^2 \times 8 \text{ in} = 25.12 \text{ in}^3$$



### Example 2

An RC-5013 cylinder has an effective area of 11.05 in<sup>2</sup> and a stroke of 13.25 in. How much oil will be required?

$$\text{Oil Capacity} = 11.05 \text{ in}^2 \times 13.25 \text{ in} = 146.41 \text{ in}^3$$

### Example 3

An RC-10010 cylinder has an effective area of 20.63 in<sup>2</sup> and a stroke of 10.25 in. How much oil will it require?

$$\text{Oil Capacity} = 20.63 \text{ in}^2 \times 10.25 \text{ in} = 211.46 \text{ in}^3$$

### Example 4

Four RC-308 cylinders are being used, each with an effective area of 6.49 in<sup>2</sup> and stroke of 8.25 in. How much oil will be required?

$$\text{Oil Capacity} = 6.49 \text{ in}^2 \times 8.25 \text{ in} = 53.54 \text{ in}^3 \text{ for one cylinder}$$

Multiply by four to obtain the required capacity: 214.17 in<sup>3</sup>

\* Note: these are theoretical examples and do not take into account the compressibility of oil under high pressure.




**Enerpac oil will compress 2.28% at 5,000 psi and 4.1% at 10,000 psi.**



## Key to cylinder dimensions

Dimensions shown in the Selection Charts of the cylinder section are identified on the relevant drawings by the capital letter references listed here: A for collapsed height through Z for depth of internal base thread.

- A = Collapsed height
- B = Extended height
- C = Cylinder body length
- D = Cylinder outside diameter
- D1 = Cylinder width
- E = Cylinder inside diameter (bore)
- F = Plunger rod diameter
- G = Oil inlet thread
- H = Cylinder bottom to advance port
- I = Cylinder top to retract port
- J = Saddle outside diameter
- K = Cylinder rod protrusion at collapsed height
- L = Plunger center to side of base
- M = Mounting holes to plunger center
- N = Length of smaller cylinder part
- O = Plunger hole or thread of saddle
- P = Plunger thread length
- Q = Plunger outside thread (pull cylinders only)
- U = Bolt circle diameter of mounting holes
- V = Thread of cylinder mounting holes
- W = Collar thread
- X = Collar thread length
- Y = Center hole diameter (hollow cylinders only)
- Z = Depth of internal base thread

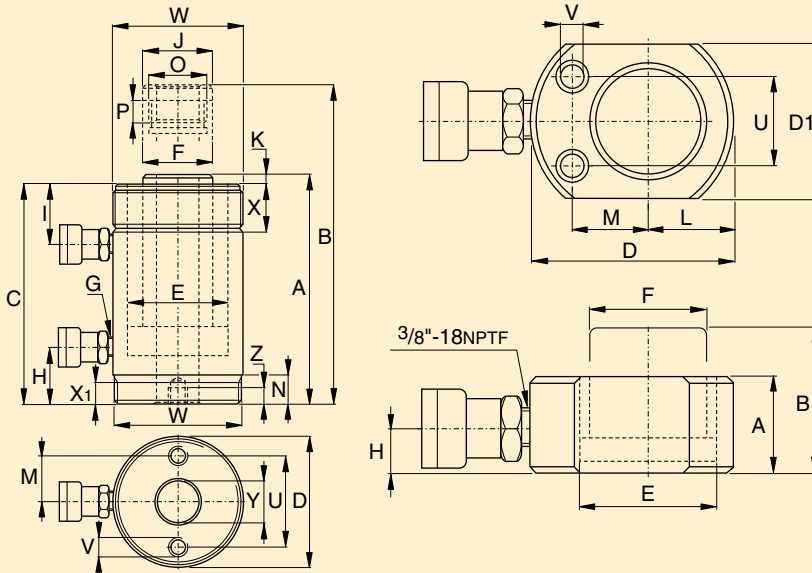

## Key to measurements

All capacities and measurements in the catalog are expressed in uniform values.

The conversion chart provides helpful information for their translation into equivalent systems.

You can also visit our website at [www.enerpac.com](http://www.enerpac.com) to download **Conpaq**, a FREE conversion calculator.

### Pressure:

- 1 psi = .069 bar
- 1 bar = 14.50 psi
- 1 kPa = .145 psi

### Volume:

- 1 in<sup>3</sup> = 16.387 cm<sup>3</sup>
- 1 cm<sup>3</sup> = .061 in<sup>3</sup>
- 1 liter = 61.02 in<sup>3</sup>
- 1 liter = .264 gal
- 1 US gal = 3,785 cm<sup>3</sup>
- = 3.785 l
- = 231 in<sup>3</sup>

### Weight:

- 1 pound (lb) = .4536 kg
- 1 kg = 2.205 lbs
- 1 metric ton = 2,205 lbs
- 1 ton (short) = 2,000 lbs
- 1 ton (short) = 907.18 kg

### Temperature:

- To convert °F to °C:  
 $T_{°C} = (T_{°F} - 32) \div 1.8$
- To convert °C to °F:  
 $T_{°F} = (T_{°C} \times 1.8) + 32$

### Other measurements:

- 1 in = 25.4 mm
- 1 mm = .039 in
- 1 in<sup>2</sup> = 6.452 cm<sup>2</sup>
- 1 cm<sup>2</sup> = .155 in<sup>2</sup>
- 1 hp = .735 kW
- 1 kW = 1.359 hp
- 1 Nm = .73756 Ft.lbs
- 1 Ft.lbs = 1.355818 Nm

### Imperial to metric

Inches	Decimal	mm
1/16	.06	1.59
1/8	.13	3.18
3/16	.19	4.76
1/4	.25	6.35
5/16	.31	7.94
3/8	.38	9.53
7/16	.44	11.11
1/2	.50	12.70
9/16	.56	14.29
5/8	.63	15.88
11/16	.69	17.46
3/4	.75	19.05
13/16	.81	20.64
7/8	.88	22.23
15/16	.94	23.81
1	1.00	25.40

# Cylinder Speed Charts



## Cylinder Speed

This chart will help you calculate the time required for an Enerpac cylinder to lift a load when powered by a 10,000 psi Enerpac hydraulic pump.

The Cylinder Speed Chart can also be used to determine the pump type and model best suited for an application when you know the plunger speed required.

## To determine:

### Cylinder plunger speed

An RC-308 cylinder (30 ton) is powered by a ZE-5 pump. While lifting the load, the cylinder plunger will require 3.2 seconds to travel 1 inch.

25 ton		30 ton		50 ton		75 ton		100 ton		Pump Type
No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	
1.5	15.5	1.9	19.5	3.3	33.2	4.8	47.7	6.2	61.9	0.5 hp Economy
.44	5.2	.65	6.5	.95	11.1	1.4	15.9	1.8	20.7	ZU4 Series
2.1	15.5	2.6	16.5	4.4	33.2	6.4	47.7	8.3	61.9	0.5 hp Submerged
.69	7.7	.87	8.7	1.5	16.6	2.1	23.9	2.8	30.9	ZE3 Series
.48	5.2	.69	6.9	1.0	11.1	1.5	15.9	1.9	20.6	ZE4 Series
.38	2.8	.48	3.2	.66	6.6	.95	9.5	1.2	12.2	ZE5 Series
.34	1.5	.43	1.9	.74	3.3	1.1	4.8	1.4	6.2	ZE6 Series
.30	.67	.38	.84	.65	1.4	.94	2.1	1.2	2.7	8000-Series
2.6	20.6	3.2	26.0	5.5	44.2	8.0	63.6	10.3	82.5	XA Series
5.2	30.9	6.5	39.0	11.0	66.3	15.9	95.5	20.6	123.9	Turbo II Pump
6.2	38.6	7.8	48.7	13.3	82.9	19.1	119.3	24.8	154.7	PA-133
.48	34.3	.60	43.3	1.0	73.7	1.5	106.0	1.9	137.5	PAM 10-Series
.36	3.9	.46	4.8	.78	8.3	1.1	11.9	1.5	15.5	ZA4 Series
1.5	7.7	1.9	9.7	3.3	16.6	4.8	23.9	6.2	30.9	PGM2 Atlas
0.44	3.1	0.56	3.9	0.95	6.6	1.4	9.5	1.8	12.4	ZG5 Series, Briggs
0.77	3.1	0.97	3.9	1.7	6.6	2.4	9.5	3.1	12.4	ZG5 Series, Honda
0.34	1.5	0.43	1.9	0.74	3.3	1.1	4.8	1.4	6.2	ZG6 Series

While extending towards the load, the cylinder plunger travels at .46 sec/in.

## To determine:

### Best matching pump

Your 30 ton cylinder needs a pump type to move a load at a speed of 6.50 sec/in. Simply go down from the top of the chart, to the value of 6.50 sec/in. Then follow the chart to the right to find that

the ZE4 pump or ZU4 is most suitable for your application.

15 ton		25 ton		30 ton		50 ton		75 ton		100 ton		Pump Type
No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	
.94	9.4	1.5	15.5	1.9	19.5	3.3	33.2	4.8	47.7	6.2	61.9	0.5 hp Economy
.27	3.1	.44	5.2	.65	6.5	.95	11.1	1.4	15.9	1.8	20.7	ZU4 Series
1.3	9.4	2.1	15.5	2.6	16.5	4.4	33.2	6.4	47.7	8.3	61.9	0.5 hp Submerged
.42	4.7	.69	7.7	.87	8.7	1.5	16.6	2.1	23.9	2.8	30.9	ZE3 Series
.39	3.1	.48	5.2	.69	6.9	1.0	11.1	1.5	15.9	1.9	20.6	ZE4 Series
.29	1.6	.38	2.8	.48	3.2	.66	6.6	.95	9.5	1.2	12.2	ZE5 Series
.21	.94	.34	1.5	.43	1.9	.74	3.3	1.1	4.8	1.4	6.2	ZE6 Series
.19	.41	.30	.67	.38	.84	.65	1.4	.94	2.1	1.2	2.7	8000-Series
1.8	12.6	2.6	20.6	3.2	26.0	5.5	44.2	8.0	63.6	10.3	82.5	XA Series
3.1	18.8	5.2	39.0	6.5	39.0	11.0	66.3	15.9	95.5	20.6	123.9	Turbo II Pump
3.8	23.6	6.2	38.6	7.8	48.7	13.3	82.9	19.1	119.3	24.8	154.7	PA-133
.39	20.9	.48	34.3	.60	43.3	1.0	73.7	1.5	106.0	1.9	137.5	PAM 10-Series
.22	2.4	.36	3.9	.46	4.8	.78	8.3	1.1	11.9	1.5	15.5	ZA4 Series
0.9	4.7	1.2	7.7	1.9	9.7	3.3	16.6	4.8	23.9	6.2	30.9	PGM2 Atlas
0.27	1.9	0.44	3.1	0.56	3.9	0.95	6.6	1.4	9.5	1.8	12.4	ZG5 Series, Briggs
0.47	1.9	0.77	3.1	0.97	3.9	1.7	6.6	2.4	9.5	3.1	12.4	ZG5 Series, Honda
0.21	0.94	0.34	1.5	0.43	1.9	0.74	3.3	1.1	4.8	1.4	6.2	ZG6 Series

## Number of Pump Handle Strokes per Inch of Cylinder Plunger Travel

Cyl. Capacity ▶	5 ton		10 ton		15 ton		25 ton		30 ton		50 ton		75 ton		100 ton		Pump Type	Page
	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load		
▼ Power Source <b>Manual</b>	7	7	15	15	21	21	34	34	43	43	73	73	105	105	137	137	<b>P-391</b>	<b>62</b>
	2	7	4	15	5	21	8	34	10	43	16	73	24	105	30	137	<b>P-392</b>	<b>62</b>
	1	7	2	15	3	21	5	34	7	43	11	73	16	105	21	137	<b>P-80/84/801</b>	<b>64</b>
	1	7	1	15	1	21	2	34	3	43	5	73	7	105	9	137	<b>P-802/842</b>	<b>62</b>
	1	3	1	8	1	11	1	18	1	23	2	38	2	55	3	71	<b>P-462/464</b>	<b>64</b>

## Seconds per Inch of Cylinder Plunger Travel

Cyl. Capacity ▶	5 ton		10 ton		15 ton		25 ton		30 ton		50 ton		75 ton		100 ton		Pump Type	Page
	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load	No Load	Load		
▼ Power Source <b>Electric</b> (speed based on 60 Hz)	.30	3.0	.67	6.7	.94	9.4	1.5	15.5	1.9	19.5	3.3	33.2	4.8	47.7	6.2	61.9	<b>0.5 hp Economy</b>	<b>74</b>
	.08	1.0	.19	2.2	.27	3.1	.44	5.2	5.6	6.5	.95	11.1	1.4	15.9	1.8	20.7	<b>ZU4 Series</b>	<b>82</b>
	.40	3.0	.90	6.7	1.3	9.4	2.1	15.5	2.6	19.5	4.4	33.2	6.4	47.7	8.3	61.9	<b>0.5 hp Submerged</b>	<b>76</b>
	.13	1.5	.30	3.4	.42	4.7	.69	7.7	.87	9.7	1.5	16.6	2.1	23.9	2.8	30.9	<b>ZE3 Series</b>	<b>88</b>
	.09	1.0	.21	2.2	.29	3.1	.48	5.2	.60	6.5	1.0	11.1	1.5	15.9	1.9	20.6	<b>ZE4 Series</b>	<b>88</b>
	.07	.50	.16	1.12	.22	1.6	.36	2.6	.46	3.2	.78	5.5	1.1	8.0	1.5	10.3	<b>ZE5 Series</b>	<b>88</b>
	.07	.30	.15	.67	.21	.94	.34	1.5	.43	1.9	.74	3.3	1.1	4.8	1.4	6.20	<b>ZE6 Series</b>	<b>88</b>
▼ Power Source <b>Air</b> (speed based on 100 psi air pressure)	.06	.13	.13	.29	.19	.41	.30	.67	.38	.84	.65	1.4	.94	2.1	1.2	2.7	<b>8000-Series</b>	<b>94</b>
	.05	4.0	1.1	9.0	1.6	12.6	2.6	20.6	3.2	26.0	5.5	44.2	8.0	63.6	10.3	82.5	<b>XA Series</b>	<b>96</b>
	1.0	5.9	2.2	13.4	3.1	18.8	5.2	30.9	6.5	39.0	11.0	66.3	15.9	95.5	20.6	123.9	<b>Turbo II Pump</b>	<b>98</b>
	1.2	7.4	2.7	16.8	3.8	23.6	6.2	38.6	7.8	48.7	13.3	82.9	19.1	119.3	24.8	154.7	<b>PA-133</b>	<b>100</b>
	.09	6.6	.21	14.9	.29	20.9	.48	34.3	.60	43.3	1.0	73.7	1.5	106.0	1.9	137.5	<b>PAM 10-Series</b>	<b>101</b>
▼ Power Source <b>Gasoline</b>	.07	.74	.16	1.7	.22	2.4	.36	3.9	.46	4.9	.78	8.3	1.1	11.9	1.5	15.5	<b>ZA4 Series</b>	<b>102</b>
	0.3	1.5	0.7	3.4	0.9	4.7	1.5	7.7	1.9	9.7	3.3	16.6	4.8	23.9	6.2	30.9	<b>PGM2 Atlas</b>	<b>105</b>
	0.08	0.59	0.19	1.3	0.27	1.9	0.44	3.1	0.56	3.9	0.95	6.6	1.4	9.5	1.8	12.4	<b>ZG5 Series, Briggs</b>	<b>106</b>
	0.15	0.59	0.34	1.3	0.47	1.9	0.77	3.1	0.97	3.9	1.7	6.6	2.4	9.5	3.1	12.4	<b>ZG5 Series, Honda</b>	<b>106</b>
0.07	0.30	0.15	0.67	0.21	0.94	0.34	1.5	0.43	1.9	0.74	3.3	1.1	4.8	1.4	6.2	<b>ZG6 Series</b>	<b>106</b>	

**No Load** indicates the plunger speed as the plunger extends toward the load (1st stage).  
**Load** indicates the plunger speed as the load is lifted at a system pressure of 10,000 psi (2nd stage).

### Formula V = A ÷ Q

$$V \text{ (sec/in)} = A \text{ (in}^2\text{)} \div Q \text{ (in}^3\text{/min)}$$

V = Cylinder plunger speed in seconds per inch

A = Cylinder effective area in square inches

Q = Pump oil flow in cubic inches

### Example

At what speed (V) will the RC-308 (30 ton) cylinder move when powered by a ZE3 electric driven pump?

ZE3 pump:  
Oil flow Q, (no load) is 450 in<sup>3</sup>/min

RC-308 cylinder:  
Effective area A is 6.50 in<sup>2</sup>

$$V = 6.50 \text{ in}^2 \div 450 \text{ in}^3\text{/min} \times 60 = .87 \text{ sec/in}$$

$$\text{Cylinder Plunger Speed (sec/in)} = \frac{\text{Cylinder Effective Area (in}^2\text{)}}{\text{Pump Flow Rate (in}^3\text{/min)}} \times \frac{60 \text{ sec}}{1}$$



## Ways

The (oil) ports on a valve.

A 3-way valve has 3 ports: pressure (P), tank (T), and cylinder (A).

A 4-way valve has 4 ports: pressure (P), tank (T), advance (A) and retract (B).

**Single-acting** cylinders require at least a 3-way valve, and can, under certain instances, be operated with a 4-way valve.


**Double-acting** cylinders require a 4-way valve, providing control of the flow to each cylinder port.

## Positions


The number of control points a valve can provide. A 2-position valve has the ability to control only the advance or retraction of the cylinder. To be able to control the cylinder with a hold position, the valve requires a 3rd position.

## Center Configuration

The center position of a valve is the position at which there is no movement required of the hydraulic component, whether a tool or cylinder.



The most common is the **Tandem Center**. This configuration provides for little to no movement of the cylinder and the unloading of the pump. This provides for minimum heat build-up.




The next most common is the **Closed Center** configuration, which is used mostly for independent control of multi-cylinder applications. This configuration again provides for little to no movement of the cylinder, but also dead-heads the pump, isolating it from the circuit. Use of this type of valve may require some means of unloading the pump to prevent heat build-up.

There are many more types of valves, such as Open Center and Float Center. These valves are used mostly in complex hydraulic circuits and require other special considerations.



Open Center




Float Center

## Directional Control Valves


### 3-Way Valves

are used with single-acting cylinders



### 4-Way Valves

are used with double-acting cylinders




Valves may be either pump mounted or remote mounted.	<b>Pump Mounted</b>	<b>Remote Mounted</b>
	<b>Manually Operated</b>	<b>Solenoid Operated</b>

## Advance Hold Retract


### Single-acting cylinder

Controlled by a 3-way, 3-position valve.




#### Advance

The oil flows from the pump pressure port P to the cylinder port A: the cylinder plunger will extend.



#### Hold

The oil flows from the pump pressure port P to the tank T. The cylinder port A is closed: the cylinder plunger will maintain its position.




#### Retract

The oil flows from the pump port P and cylinder port A to the tank T: the cylinder plunger will retract.


### Double-acting cylinder

Controlled by a 4-way, 3-position valve.




#### Advance

The oil flows from the pump pressure port P to the cylinder port A, and from cylinder port B to tank T: the cylinder plunger will extend.



#### Hold

The oil flows from the pump pressure port P to the tank T. The cylinder ports A and B are closed: the cylinder plunger will maintain position.



#### Retract

The oil flows from the pump pressure port P to cylinder port B, and from cylinder port A to tank T: the cylinder plunger will retract.



## Tightening Methods

Principally there are two modes of tightening: "Uncontrolled" and "Controlled".

### **Uncontrolled tightening**

Uses equipment and/or procedures that cannot be measured. Preload is applied to a bolt and nut assembly using a hammer and spanner or other types of impact tools.

### **Controlled tightening**

Employs calibrated and measurable equipment, follows prescribed procedures and is carried out by trained personnel.



For further information on Torque Tightening or other controlled tightening methods, please visit [www.enerpac.com](http://www.enerpac.com).

## Advantages of Controlled Tightening

### Known, controllable and accurate bolt loads

Employs tooling with controllable outputs and adopts calculation to determine the required tool settings.

### Uniformity of bolt loading

Especially important on gasketed joints as an even and consistent compression is required for the gasket to be effective.

### Safe operation following prescribed procedures

Eliminates the dangerous activities of manual uncontrolled tightening and requires that the operators be skilled and follow procedures.

### Reduces operational time resulting in increased productivity

Reduces tightening time and operator fatigue by replacing manual effort with the use of controlled tooling.

### Reliable and repeatable results

Using calibrated, tested equipment, following procedures and employing skilled operators achieves known results consistently.

### The right results first time

Many of the uncertainties surrounding in-service joint failures are removed by ensuring the correct assembly and tightening of the joint are carried out the first time.

## What is Torque?

It is a measure of how much force acting on an object which causes that object to rotate.

### **What is Torque Tightening?**

The application of preload to a fastener by the turning of the fastener's nut.


## Torque Tightening and Preload

The amount of preload created when torqueing is largely dependant on the effects of friction.


Principally there are three different "torque components":

- torque to stretch the bolt
- torque to overcome the friction in bolt and nut threads
- torque to overcome friction at the nut spot face (bearing contact surface).

## Torque Tightening

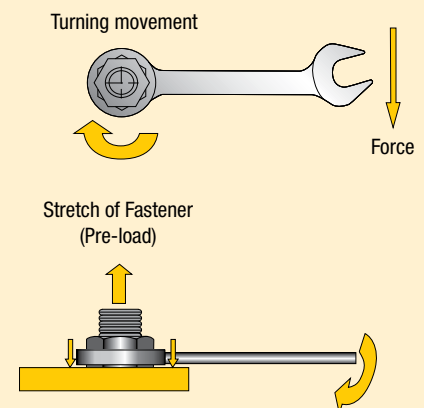

Visit [www.enerpac.com](http://www.enerpac.com) to access our free on-line bolting software application and obtain information on tool selection, bolt load calculations and tool pressure settings. A combined application data sheet and joint completion report is also available.

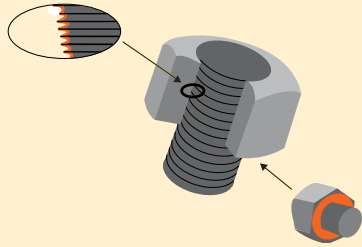

*Friction points should always be lubricated when using the torque tightening method.*




**Preload (residual load) = Applied Torque *minus* Frictional Losses**

### Lubrication Reduces Friction

Lubrication reduces the friction during tightening, decreases bolt failure during installation and increases bolt service life. Variation in friction coefficients affect the amount of preload achieved at a specified torque. Higher friction results in less conversion of torque to preload. The value for the friction coefficient provided by the lubricant manufacturer must be known to accurately establish the required torque value.

Lubricant or anti-seize compounds should be applied to both the nut bearing surface and the male threads.

### Frictional Losses




**Frictional Losses (dry steel bolt)**

### Torque Procedure

When torquing it is common to tighten only one bolt at a time, this can result in Point Loading and Load Scatter. To avoid this, torque is applied in stages following a prescribed pattern:

#### Torque Sequence

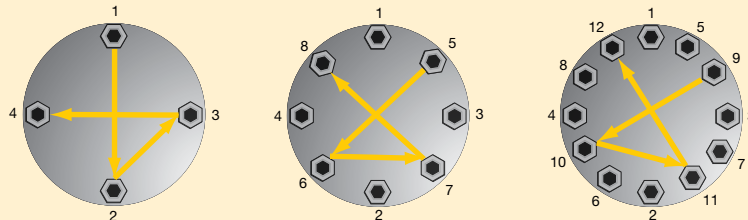

- Step 1** Spanner tight ensuring that 2 - 3 threads extend above nut
- Step 2** Tighten each bolt to **one-third** of the final required torque following the pattern as shown above.
- Step 3** Increase the torque to **two-thirds** following the pattern shown above.

- Step 4** Increase the torque to **full torque** following the pattern shown above.
- Step 5** Perform one final pass on each bolt working clockwise from bolt 1, at the full final torque.

### Breakout Torque

When loosening bolts a torque value higher than the tightening torque is normally required. This is mainly due to corrosion and deformations in the bolt and nut threads.

Breakout torque cannot be accurately calculated, however, depending on conditions it can take up to 2½ times the input torque to breakout.

The use of penetrating oils or anti-seize products is always recommended when performing breakout operations.



#### Select the Right Wrench

Choose your Enerpac torque wrench using the untightening rule of thumb:

- When loosening a nut or bolt more torque is usually required than when tightening.
- For general conditions it can take up to 2½ times the input torque to breakout.
- Do not apply more than 75% of the maximum torque output of the tool when loosening nuts or bolts.

#### Conditions of bolted joints

- Humidity corrosion (rust) requires up to twice the torque required for tightening.
- Sea water and chemical corrosion requires up to 2½ times the torque required for tightening.
- Heat corrosion requires up to 3 times the torque required for tightening.





**E**NERPAC manufactures high-force hydraulics (cylinders, pumps, valves, presses, pullers, tools, accessories and system components) for industry and construction and provides hydraulic workholding and OEM solutions to industries worldwide.

With an 80-year history of quality and innovation, the broadest line in the business, and more than 4,000 distributors and factory-trained service centers around the world, Enerpac leads the industry by setting new standards in design, strength, durability and local support. Strict quality programs, zero tolerance for defects, and ISO-9001 certification are your assurance of safe, trouble-free operation.

Enerpac is ready to tackle your toughest challenge and provide the hydraulic advantage you need to increase productivity, labor efficiency and speed of operation.



### www.enerpac.com for latest Enerpac information

Visit the Enerpac Web Site and find out about:

- Learn more about hydraulics
- Promotions
- New products
- Electronic Catalogs
- Trade shows
- Manuals (instruction and repair sheets)
- Nearest Distributors & Service Centers
- Enerpac products in action
- Integrated Solutions

### Ordering Products and Catalogs

To find the name of the closest Enerpac distributor or service center, to request literature or technical application assistance, contact Enerpac at one of the addresses on the next page or pose your question through E-mail: [info@enerpac.com](mailto:info@enerpac.com)

### Enerpac catalogs/brochures to meet your needs:

To obtain your copy just give us a call, or visit our Internet site [www.enerpac.com](http://www.enerpac.com)

**E410, Bolting Solutions Catalog:** Caters to the complete bolting workflow, ensuring joint integrity in a variety of applications throughout industry, including: joint assembly, controlled tightening and joint separation.



**Workholding Catalog:** Offers innovative products and solutions to provide powerful clamping and positioning force to every type of manufacturing process. Enerpac Workholding solutions increase product quality and production output.



**Concrete Stressing Products:** Trusted solutions designed for the challenging demands of concrete stressing. From wedge anchoring products to tensioning jacks, Enerpac offers high quality, durability and reliability.



While every care has been taken in the preparation of this catalog and all data contained within is deemed accurate at the time of printing, Enerpac does reserve the right to make changes to the specifications of any product, or discontinue any product, contained within this catalog without prior notice.

All illustrations, performance specifications, weights and dimensions reflect the nominal values and slight variations may occur due to manufacturing tolerances. Please consult Enerpac if final dimensions are critical. All information in this catalog can be changed due to product improvements without prior notice.

© Copyright 2009, Enerpac.  
All rights reserved. Any copying or other use of material in this catalog (text, illustrations, drawings, photos) without express written consent is prohibited.



## Africa

ENERPAC Middle East FZE  
Office 423, JAFZA 15  
P.O. Box 18004  
Jebel Ali, Dubai  
United Arab Emirates  
Tel: +971 (0)4 8872686  
Fax: +971 (0)4 8872687

## Australia and New Zealand

Actuant Australia Ltd.  
Block V Unit 3  
Regents Park Estate  
391 Park Road  
Regents Park NSW 2143  
(P.O. Box 261) Australia  
Tel: +61 297 438 988  
Fax: +61 297 438 648

## Brazil

Power Packer do Brasil Ltda.  
Rua dos Inocentes, 587  
04764-050 - Sao Paulo (SP)  
Tel: +55 11 5687 2211  
Fax: +55 11 5686 5583  
Toll Free: 0800 891 5770  
vendasbrasil@enerpac.com

## Canada

Actuant Canada Corporation  
6615 Ordan Drive, Unit 14-15  
Mississauga, Ontario L5T 1X2  
Tel: +1 905 564 5749  
Fax: +1 905 564 0305  
Toll Free:  
Tel: +1 800 268 4987  
Fax: +1 800 461 2456  
Technical Inquiries:  
techservices@enerpac.com

## China

Actuant Industries Co. Ltd.  
No.6 Nanjing Road,  
Taicang Economic Dep Zone  
Jiangsu, China  
Tel: +86 0512 5328 7529  
+86 0512 5328 7500 7529  
Fax: +86 0512 5335 9690

## Actuant China Ltd. (Peking)

709B Diyang Building  
Xin No. 2  
Dong San Huan North Rd.  
Beijing City, 100028 China  
Tel: +86 10 845 36166  
Fax: +86 10 845 36220

## France, Switzerland francophone

ENERPAC Une division de ACTUANT  
France S.A.  
ZA de Courtaboeuf  
32, avenue de la Baltique  
91140 VILLEBON /YVETTE  
France  
Tel: +33 1 60 13 68 68  
Fax: +33 1 69 20 37 50

## Germany, Austria, Switzerland, Greece, Baltic States, Central and Eastern Europe

ENERPAC GmbH  
P.O. Box 300113  
D-40401 Düsseldorf  
Willstätterstrasse 13  
D-40549 Düsseldorf Germany  
Tel: +49 211 471 490  
Fax: +49 211 471 49 28

## India

ENERPAC Hydraulics Pvt. Ltd.  
No. 1A, Peenya Industrial Area  
II<sup>nd</sup> Phase, Bangalore, 560 058  
India  
Tel: +91 80 40 792 777  
Fax: +91 80 40 792 792

## Italy

ENERPAC S.p.A.  
Via Canova 4  
20094 Corsico (Milano)  
Tel: +39 02 4861 111  
Fax: +39 02 4860 1288

## Japan

Applied Power Japan LTD KK  
Besshocho 85-7  
Kita-ku, Saitama-shi 331-0821  
Japan  
Tel: +81 48 662 4911  
Fax: +81 48 662 4955

## Middle East, Turkey and Caspian Sea

ENERPAC Middle East FZE  
Office 423, JAFZA 15  
P.O. Box 18004  
Jebel Ali, Dubai  
United Arab Emirates  
Tel: +971 (0)4 8872686  
Fax: +971 (0)4 8872687

## Russia and CIS

(excl. Caspian Sea Countries)  
Actuant LLC  
Admiral Makarov Street 8  
125212 Moscow  
Russia  
Tel: +7-495-9809091  
Fax: +7-495-9809092

## Singapore

Actuant Asia Pte Ltd.  
37C, Benoi Road Pioneer Lot,  
Singapore 627796  
Tel: +65 68 63 0611  
Fax: +65 64 84 5669  
Toll Free:  
Tel: +1800 363 7722  
Technical Inquiries:  
techsupport@enerpac.com.sg

## South Korea

Actuant Korea Ltd.  
3Ba 717,  
Shihwa Industrial Complex  
Jungwang-Dong, Shihung-Shi,  
Kyunggi-Do  
Republic of Korea 429-450  
Tel: +82 31 434 4506  
Fax: +82 31 434 4507

## Spain and Portugal

ENERPAC SPAIN, S.L.  
Avda. Los Frailes, 40 – Nave C & D  
Pol. Ind. Los Frailes  
28814 DAGANZO DE ARRIBA  
(Madrid) Spain  
Tel: +34 91 661 11 25  
Fax: +34 91 661 47 89

## Sweden, Denmark, Norway, Finland and Iceland

Enerpac Scandinavia AB  
Fabriksgatan 7  
412 50 Gothenburg  
Sweden  
Tel: +46 (0) 31 7990281  
Fax: +46 (0) 31 7990010  
Inquiries:  
Scandinavianinquiries@enerpac.com

## The Netherlands, Belgium and Luxembourg

ENERPAC B.V.  
Galvanistraat 115, 6716 AE Ede  
P.O. Box 8097, 6710 AB Ede  
The Netherlands  
Tel: +31 318 535 800  
Fax: +31 318 525 613  
+31 318 535 848  
Inquiries:  
beneluxinquiries@enerpac.com

## United Kingdom and Ireland

ENERPAC Ltd.,  
Bentley Road South  
Darlaston, West Midlands  
WS10 8LQ, England  
Tel: +44 (0)121 50 50 787  
Fax: +44 (0)121 50 50 799

## USA, Latin America and Caribbean

ENERPAC  
P.O. Box 3241  
6100 N. Baker Road  
Milwaukee, WI 53209 USA  
Tel: +1 262 781 6600  
Fax: +1 262 783 9562  
User inquiries:  
+1 800 433 2766  
Distributor inquiries/orders:  
+1 800 558 0530  
Technical Inquiries:  
techservices@enerpac.com

052409

While every care has been taken in the preparation of this catalog and all data contained within is deemed accurate at the time of printing, Enerpac does reserve the right to make changes to the specifications of any product, or discontinue any product, contained within this catalog without prior notice.

All illustrations, performance specifications, weights and dimensions reflect the nominal values and slight variations may occur due to manufacturing tolerances. Please consult Enerpac if final dimensions are critical.



## Cylinders, Lifting Products and Systems

Page 4-59



## Pumps & Directional Control Valves

Page 60-115



## System Components & Control Valves

Page 116-133



## Presses

Page 134-149



## Pullers

Page 150-163



## Tools

Page 164-185



## Bolting Tools

Page 186-223



## Integrated Solutions

Page 224-240

### Africa

ENERPAC Middle East FZE  
Tel: +971 (0)4 8872686 - Fax: +971 (0)4 8872687

### Australia and New Zealand

Actuant Australia Ltd.  
Tel: +61 297 438 988 - Fax: +61 297 438 648

### Brazil

Power Packer do Brasil Ltda.  
Tel: +55 11 5687 2211 - Fax: +55 11 5686 5583  
Toll Free:  
Tel: 0800 891 5770

### Canada

Actuant Canada Corporation  
Tel: +1 905 564 5749 - Fax: +1 905 564 0305  
Toll Free:  
Tel: +1 800 268 4987 - Fax: +1 800 461 2456

### China

Actuant China Ltd.  
Tel: +86 0512 5328 7529 - Fax: +86 0512 5335 9690  
Tel: +86 10 845 36166 - Fax: +86 10 845 36220

### France

ENERPAC  
Une division de ACTUANT France S.A.  
Tel: +33 1 601 368 68 - Fax: +33 1 692 037 50

### Germany, Austria and Switzerland, Greece, Baltic States, Central and Eastern Europe

ENERPAC GmbH  
Tel: +49 211 471 490 - Fax: +49 211 471 49 28

### India

ENERPAC Hydraulics (India) Pvt. Ltd.  
Tel: +91 80 40 792 777 - Fax: +91 80 40 792 792

### Italy

ENERPAC S.p.A.  
Tel: +39 02 4861 111 - Fax: +39 02 4860 1288

### Japan

Applied Power Japan Ltd.  
Tel: +81 48 662 4911 - Fax: +81 48 662 4955

### Middle East, Turkey and Caspian Sea

ENERPAC Middle East FZE  
Tel: +971 (0)4 8872686 - Fax: +971 (0)4 8872687

### Russia and CIS

(excl. Caspian Sea Countries)  
Tel: +7-495-9809091 - Fax: +7-495-9809092

### Singapore

Actuant Asia Pte. Ltd.  
Tel: +65 68 63 0611 - Fax: +65 64 84 5669  
Tel: +65 64 84 3737  
Toll Free:  
Tel: +1800 363 7722

### South Korea

Actuant Korea Ltd.  
Tel: +82 31 434 4506 - Fax: +82 31 434 4507

### Spain and Portugal

ENERPAC SPAIN, S.L.  
Tel: +34 91 661 11 25 - Fax: +34 91 661 47 89

### Sweden, Denmark, Norway, Finland and Iceland

Tel: 46 (0) 31 7990281 - Fax: +46 (0) 31 7990010

### The Netherlands, Belgium, Luxembourg

ENERPAC B.V.  
Tel: +31 318 535 800 - Fax: +31 318 525 613  
+31 318 535 848

### United Kingdom and Ireland

ENERPAC Ltd.  
Tel: +44 (0)121 50 50 787 - Fax: +44 (0)121 50 50 799

### USA, Latin America and Caribbean

ENERPAC  
Tel: +1 262 781 6600 - Fax: +1 262 783 9562

### User inquiries:

+1 800 433 2766

### Distributor inquiries/orders:

+1 800 558 0530

For complete list of addresses: page 256

e-mail: [info@enerpac.com](mailto:info@enerpac.com)  
internet: [www.enerpac.com](http://www.enerpac.com)