

JET



JET[®]



TABLE OF CONTENTS

CHAIN HOISTS 4-9	PNEUMATIC HOIST 23
L100 SERIES	AH SERIES
SMH SERIES	
L90 SERIES	
LEVER HOISTS 10-15	PNEUMATIC TROLLEY 23
JLP SERIES	AT SERIES
MINI-MITE SERIES	
JLH SERIES	
PLAIN TROLLEYS 16	PUSH BUTTON CONTROLS 24
HDT SERIES HEAVY-DUTY	
PT INDUSTRIAL-DUTY	
GEARED TROLLEYS 17	AIR HOIST PENDANT 24
GT	CONTROLS
BEAM CLAMPS 17	CHAIN BUCKETS 24
HBC HD	
JBC INDUSTRIAL-DUTY	
ELECTRIC CHAIN HOISTS 18-21	PULLERS 25
SSC SERIES	JCP SERIES
DSC	JCH LINESMEN
	JG GRIP
ELECTRIC TROLLEYS 22	WEB SLINGS 26
ET SERIES	
	LIFTING ACCESSORIES 27
	RIGGING EQUIPMENT
	AUTHORIZED SERVICE CENTERS 28-31



COUNTDOWN SWEEPSTAKES

WIN BIG! WITH THE ULTIMATE YEAR-LONG GIVEAWAY!

Enter for a chance to win our monthly JET Tools Anniversary Sweepstakes and automatically be entered to win our year ending Ultimate Work Shop Grand Prize.

12 MONTHLY PRIZES!
NEW GIVEAWAYS EVERY MONTH!

+

1 HUGE GRAND PRIZE!
\$10,000 ULTIMATE WORKSHOP!

+

600 INSTANT PRIZES!
GREAT GIFTS JUST FOR ENTERING!

Sweepstakes ends December 31, 2008.

ENTER NOW

GO TO WWW.JETTOOLS.COM/ENTERNOW



STILL INTO HEAVY LIFTING

JET was born in 1958 when the founder of the company took the first Boeing Jet airplane from Seattle, Washington to Japan.



JET began as a small dealer of air hoists and trolleys; sold out of a single hardware store in Seattle, Washington.

From a single store front, to thousands of dealers across the US, JET has grown and evolved with the times.

Our colors have gone from green, to orange, and now to our instantly recognizable trademark JET white. Our product line has grown, and our distribution centers have expanded. Through it all, JET still maintains the same message of quality, service, and innovation that we were founded on.

We pride ourselves on bringing new products to our consumers, and working with world class distributors. Please join us in celebrating this milestone and remember; when you want the best product for the right price, think JET.



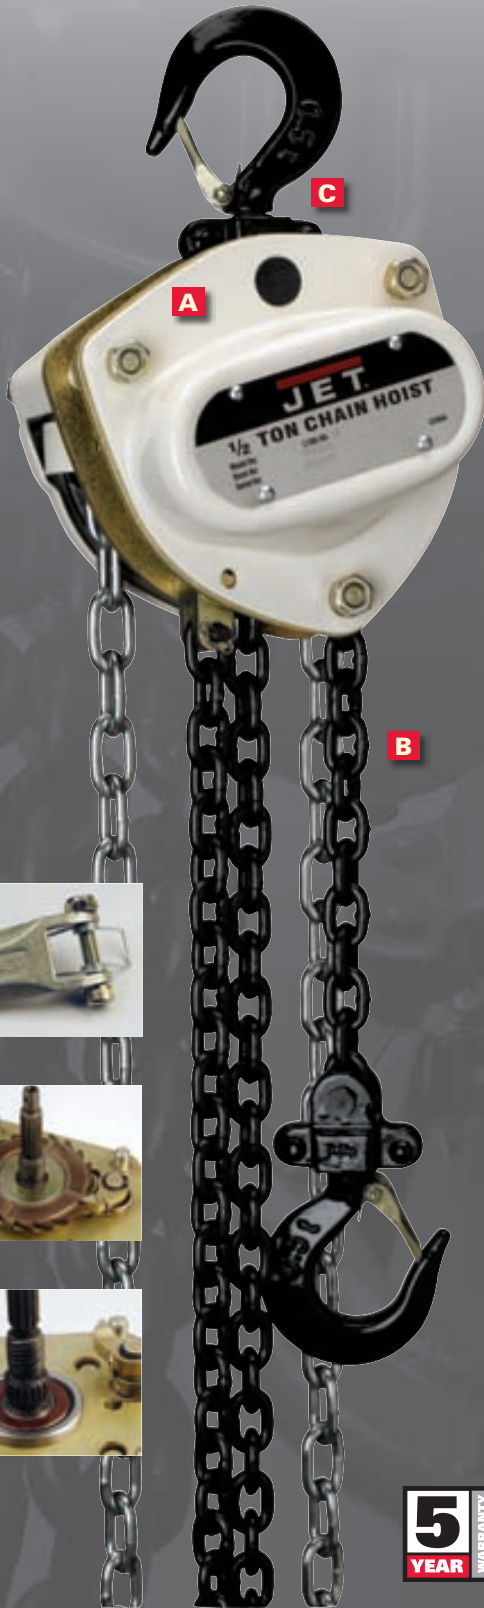


- A. Optional Overload Protection**
- B. 100 Grade Chain**
- C. Hook Swivels 360°**
- D. Cast Safety Latches**
- E. Fused Brake Discs**
- F. Caged Needle Bearing Supported Drive Pinion**

FEATURES

- Full range capacity 1/2 to 10 tons
- All steel construction with a durable powder coat finish
- Patented fused brake discs offer longer life and ease of replacement
- Sealed ball bearing supported load sheave
- Lightweight, compact design for low headroom applications
- Triple-spur gears provide high efficiency with minimum effort
- Heat treated and hardened 100 grade load chain
- Smooth rolled edge on hand chain cover prevents side pull jamming
- Dropped forged alloy steel safety hooks feature wide throats for ease of rigging
- Sealed ball bearing supported load sheave
- Models with slip clutch overload protection available
- Drive pinion supported on both ends with sealed ball bearings
- Cast safety latches
- Complies with OSHA, ANSI/ASME B30.16 and HST-2 standards
- Custom lifts available in all capacities

DIMENSIONS

Model	A	B	C	D	E	F
1/2 T	161	158	53	31	27	35-1/2
1 T	161	162	53	31	29	42-1/2
1-1/2T	182	171	64	36	34	57-1/2
2 T	202	182	64	36	36	50
3 T	235	171	106	44	42-1/2	56
5 T	282	192	133	66	46-1/2	63
10 T	438	192	254	99	72-1/2	85

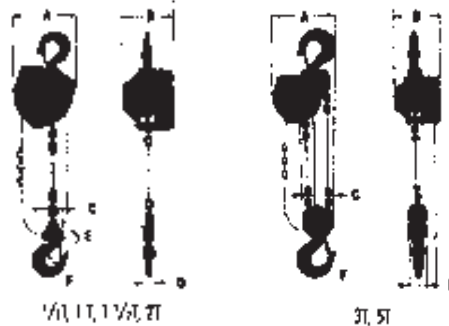

⚠ WARNING

- Always provide an adequate safety factor to handle rated load plus weight of equipment
- Do not use for lifting, supporting, transporting people, or lifting or supporting loads of people
- Before installation read and understand owners manual
- Not for use in an explosive environment

SPECIFICATIONS

Stock Number	Model Number	Capacity (tons)	Capacity (lbs)	Standard Lift (ft)	Headroom (in)	Number of Falls	Load Chain (dia/mm)	Required Hand Chain (ft) to Lift Capacity	Pounds Of Pull To Lift Capacity	Weight (lbs)
1/2-TON*										
106210	L100-50-10	1/2	1100	10	11-1/4	1	5	25	53	24
105215	L100-50-15	1/2	1100	15	11-1/4	1	5	25	53	28-1/2
106220	L100-50-20	1/2	1100	20	11-1/4	1	5	25	53	34
105230	L100-50-30	1/2	1100	30	11-1/4	1	5	25	53	43-1/2
1/2-TON WITH OVERLOAD PROTECTION*										
104100	L100-50WO-10	1/2	1100	10	11-1/4	1	5	25	53	24
1-TON*										
101210	L100-100-10	1	2200	10	11-5/8	1	6.3	43	64	27
101215	L100-100-15	1	2200	15	11-5/8	1	6.3	43	64	33-1/4
104220	L100-100-20	1	2200	20	11-5/8	1	6.3	43	64	39-1/4
101230	L100-100-30	1	2200	30	11-5/8	1	6.3	43	64	51
1-TON WITH OVERLOAD PROTECTION*										
102100	L100-1TWO-10	1	2200	10	11-5/8	1	6.3	43	64	27
1-1/2-TON*										
101610	L100-150-10	1-1/2	3300	10	13-3/4	1	7.1	57	77	34-1/4
101615	L100-150-15	1-1/2	3300	15	13-3/4	1	7.1	57	77	41
101620	L100-150-20	1-1/2	3300	20	13-3/4	1	7.1	57	77	48
101630	L100-150-30	1-1/2	3300	30	13-3/4	1	7.1	57	77	62
1-1/2-TON WITH OVERLOAD PROTECTION*										
101100	L100-150WO-10	1-1/2	3300	10	13-3/4	1	7.1	57	77	34-1/4
2-TON*										
102210	L100-200-10	2	4400	10	14-3/4	1	8	70	79	44
102215	L100-200-15	2	4400	15	14-3/4	1	8	70	79	52
102220	L100-200-20	2	4400	20	14-3/4	1	8	70	79	59
102230	L100-200-30	2	4400	30	14-3/4	1	8	70	79	74-1/2
2-TON WITH OVERLOAD PROTECTION*										
105100	L100-200WO-10	2	4400	10	14-3/4	1	8	70	79	44
3-TON*										
103210	L100-300-10	3	6600	10	20-1/8	2	7.1	114	79	53
103215	L100-300-15	3	6600	15	20-1/8	2	7.1	114	79	63-1/2
103220	L100-300-20	3	6600	20	20-1/8	2	7.1	114	79	74
103230	L100-300-30	3	6600	30	20-1/8	2	7.1	114	79	95-1/4
3-TON WITH OVERLOAD PROTECTION*										
106100	L100-300WO-10	3	6600	10	20-1/8	2	7.1	114	79	53
5-TON*										
105510	L100-500-10	5	11,000	10	23-5/8	2	9	198	75	90
105515	L100-500-15	5	11,000	15	23-5/8	2	9	198	75	105
105520	L100-500-20	5	11,000	20	23-5/8	2	9	198	75	119-1/2
105530	L100-500-30	5	11,000	30	23-5/8	2	9	198	75	149
5-TON WITH OVERLOAD PROTECTION*										
107100	L100-500WO-10	5	11,000	10	23-5/8	2	9	198	75	90
10-TON*										
101010	L100-1000-10	10	22,000	10	29-7/8	4	9	396	79	174
101020	L100-1000-20	10	22,000	20	29-7/8	4	9	396	79	227
101030	L100-1000-30	10	22,000	30	29-7/8	4	9	396	79	279
10-TON WITH OVERLOAD PROTECTION*										
108100	L100-1000WO-10	10	22,000	10	29-7/8	4	9	396	79	174

* Custom lifts available in all capacities in 5 ft increments

ACCESSORIES


Manual Trolleys	See page 16
Geared Trolleys	See page 17
Beam Clamps	See page 17
Web Slings	See page 26



See page 16



See page 17



See page 17



See page 26




FEATURES

- Full range capacity 1/2 to 10 tons
- Economical hand chain hoist designed for years of trouble-free service
- Standard features found only in higher priced models
- 10', 15', 20' and 30' lifts standard, custom length lifts available
- All steel construction with a durable powder coat finish
- Lightweight, compact design for low headroom applications
- Available with slip clutch style overload protection
- Needle bearing supported load sheave for smooth operation
- Completely enclosed Weston type automatic brake system for precise load spotting
- Triple-spur gears provide high efficiency ratio with minimum effort
- Induction hardened grade 80 load chain
- Drop forged hooks with heavy-duty safety latches swivel 360° for easy rigging
- Smooth rolled edge on hand chain cover prevents side pull jamming
- Standard hand chain drop equals lift length
- Proof tested with test certificate
- Complies with OSHA, ANSI/ASME B30.16 and HST-2 standards

DIMENSIONS

Model	A	B	C	D	E	F
1/2-Ton	5-1/2	4-1/2	2	1-1/4	7/8	1-3/8
1-Ton	6-5/8	5-1/5	2-1/8	1-1/4	1-1/8	1-9/16
1-1/2-Ton	7-3/4	5-3/4	2-1/2	1-7/8	1-1/4	1-3/4
2-Ton	8-7/8	5-3/4	2-3/5	1-3/4	1-3/8	2
3-Ton	8-1/2	6	3-5/8	2-3/4	1-3/4	2-1/4
5-Ton	9-1/2	7	4-1/2	3	2	2-5/8
10-Ton	17-1/2	7	12-1/4	4	3	3-1/2

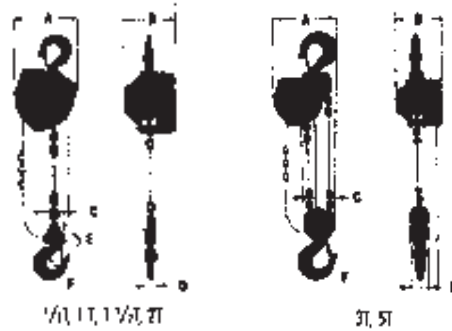

WARNING

- Always provide an adequate safety factor to handle rated load plus weight of equipment
- Do not use for lifting, supporting, transporting people, or lifting or supporting loads of people
- Before installation read and understand owners manual
- Not for use in an explosive environment



SPECIFICATIONS

Stock Number	Model Number	Capacity (tons)	Capacity (lbs)	Standard Lift (ft)	Headroom (in)	Number of Falls	Load Chain (dia/mm)	Required Hand Chain (ft) to Lift Capacity	Pounds Of Pull To Lift Capacity	Weight (lbs)
1/2-TON*										
101700	SMH-1/2T-10	1/2	1100	10	13	1	5	32	49	20
101701	SMH-1/2T-15	1/2	1100	15	13	1	5	32	49	24-1/4
101702	SMH-1/2T-20	1/2	1100	20	13	1	5	32	49	29-3/4
101703	SMH-1/2T-30	1/2	1100	30	13	1	5	32	49	40
1-TON*										
101704	SMH-1T-10	1	2200	10	15	1	6.3	37	80	26-1/2
101705	SMH-1T-15	1	2200	15	15	1	6.3	37	80	33
101706	SMH-1T-20	1	2200	20	15	1	6.3	37	80	38-1/2
101707	SMH-1T-30	1	2200	30	15	1	6.3	37	80	51
1-TON WITH OVERLOAD PROTECTION*										
121704	SMH-1TWO-10	1	2200	10	15	1	6.3	37	80	26
121706	SMH-1TWO-20	1	2200	20	15	1	6.3	37	80	38-1/2
1-1/2-TON*										
101708	SMH-1-1/2T-10	1-1/2	3300	10	17-1/2	1	7	58	82	40-3/4
101709	SMH-1-1/2T-15	1-1/2	3300	15	17-1/2	1	7	58	82	48-1/2
101710	SMH-1-1/2T-20	1-1/2	3300	20	17-1/2	1	7	58	82	55
101711	SMH-1-1/2T-30	1-1/2	3300	30	17-1/2	1	7	58	82	68
2-TON*										
101712	SMH-2T-10	2	4400	10	18-1/2	1	8	70	91	45
101713	SMH-2T-15	2	4400	15	18-1/2	1	8	70	91	53
101714	SMH-2T-20	2	4400	20	18-1/2	1	8	70	91	60-1/2
101715	SMH-2T-30	2	4400	30	18-1/2	1	8	70	91	76
2-TON WITH OVERLOAD PROTECTION*										
121712	SMH-2TWO-10	2	4400	10	18-1/2	1	8	70	91	45
121714	SMH-2TWO-20	2	4400	20	18-1/2	1	8	70	91	60-1/2
3-TON*										
101716	SMH-3T-10	3	6600	10	23-1/2	2	7	116	86	57
101717	SMH-3T-15	3	6600	15	23-1/2	2	7	116	86	68
101718	SMH-3T-20	3	6600	20	23-1/2	2	7	116	86	78-1/4
101719	SMH-3T-30	3	6600	30	23-1/2	2	7	116	86	99
3-TON WITH OVERLOAD PROTECTION*										
121716	SMH-3TWO-10	3	6600	10	23-1/2	2	7	116	86	57
121718	SMH-3TWO-20	3	6600	20	23-1/2	2	7	116	86	78
5-TON*										
101720	SMH-5T-10	5	11,000	10	28	2	9	172	97	84
101721	SMH-5T-15	5	11,000	15	28	2	9	172	97	99
101722	SMH-5T-20	5	11,000	20	28	2	9	172	97	115
101723	SMH-5T-30	5	11,000	30	28	2	9	172	97	145-1/2
5-TON WITH OVERLOAD PROTECTION*										
121720	SMH-5TWO-10	5	11,000	10	28	2	9	172	97	84
121726	SMH-5TWO-20	5	11,000	20	28	2	9	172	97	115
10-TON*										
101724	SMH-10T-10	10	22,000	10	35	4	9	344	104	163
101725	SMH-10T-15	10	22,000	15	35	4	9	344	104	191
101726	SMH-10T-20	10	22,000	20	35	4	9	344	104	218-1/4
101727	SMH-10T-30	10	22,000	30	35	4	9	344	104	271

* Custom lifts available in all capacities in 5ft increments

ACCESSORIES


Manual Trolleys	See page 16
Geared Trolleys	See page 17
Beam Clamps	See page 17
Web Slings	See page 26



See page 16



See page 17



See page 17



See page 26

L-90 SERIES HAND CHAIN HOISTS



CHAIN HOISTS



101520


FEATURES

- Full range capacity 1/2 to 60* tons
- Compact and portable for ease of positioning material
- Engineered for commercial and industrial lifting applications
- 10', 15', 20' and 30' lifts standard, custom length lifts available
- All steel construction with a durable powder coat finish
- Lightweight, compact design for low headroom applications
- Completely enclosed Weston type automatic brake system for positive load spotting
- Triple-spur gears provide high efficiency with minimum effort
- Heat treated and hardened grade 80 load chain
- Smooth rolled edge on hand chain cover prevents side pull jamming
- Wide throat drop forged safety hooks for easier rigging
- Standard hand chain drop equals lift length
- Proof tested with test certificate
- Complies with OSHA, ANSI/ASME B30.16 and HST-2 standards

*15T-60T Special order only

DIMENSIONS

Model	A	B	C	D	E	F
1/2 Ton	5-1/2	6-1/8	2-9/32	1-1/4	1	1-7/16
1 Ton	6-1/4	6-1/4	2-7/16	1-3/8	1-3/16	1-11/16
1-1/2 Ton	7-1/4	6-5/8	2-9/16	1-7/16	1-3/8	1-7/8
2 Ton	8-1/2	7-3/16	2-5/8	1-5/8	1-1/2	2-3/32

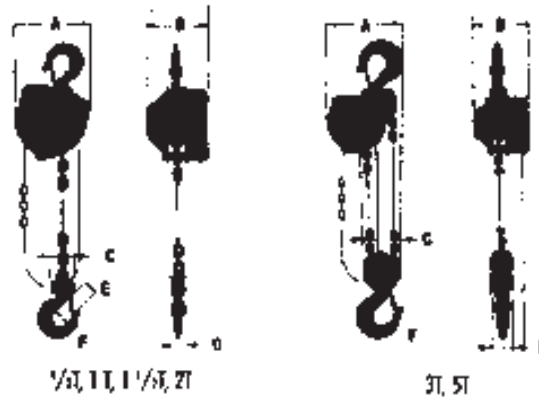

⚠ WARNING

- Always provide an adequate safety factor to handle rated load plus weight of equipment
- Do not use for lifting, supporting, transporting people, or lifting or supporting loads of people
- Before installation read and understand owners manual
- Not for use in an explosive environment





SPECIFICATIONS

Stock Number	Model Number	Capacity (tons)	Capacity (lbs)	Standard Lift (ft)	Headroom (in)	Number of Falls	Load Chain (dia/mm)	Required Hand Chain (ft) to Lift Capacity	Pounds Of Pull To Lift Capacity	Weight (lbs)
1/2-TON*										
101505	L-90-1/2T-10	1/2	1100	10	10-3/4	1	5	29	59	21-1/2
101305	L-90-1/2T-15	1/2	1100	15	10-3/4	1	5	29	59	26-1/2
101306	L-90-1/2T-20	1/2	1100	20	10-3/4	1	5	29	59	31-1/2
101307	L-90-1/2T-30	1/2	1100	30	10-3/4	1	5	29	59	41-1/2
1-TON*										
101510	L-90-1T-10	1	2200	10	11-3/4	1	6.3	50	69	27
101310	L-90-1T-15	1	2200	15	11-3/4	1	6.3	50	69	33
101311	L-90-1T-20	1	2200	20	11-3/4	1	6.3	50	69	39
101312	L-90-1T-30	1	2200	30	11-3/4	1	6.3	50	69	51
1-1/2-TON*										
101515	L-90-1-1/2T-10	1-1/2	3520	10	13-1/4	1	7.1	60	91	34-1/2
101315	L-90-1-1/2T-15	1-1/2	3520	15	13-1/4	1	7.1	60	91	41-1/4
101316	L-90-1-1/2T-20	1-1/2	3520	20	13-1/4	1	7.1	60	91	48
101317	L-90-1-1/2T-30	1-1/2	3520	30	13-1/4	1	7.1	60	91	61
2-TON*										
101520	L-90-2T-10	2	4400	10	14-3/4	1	8	77	88	46
101525	L-90-2T-15	2	4400	15	14-3/4	1	8	77	88	54
101320	L-90-2T-20	2	4400	20	14-3/4	1	8	77	88	61-1/2
101321	L-90-2T-30	2	4400	30	14-3/4	1	8	77	88	76-1/2
3-TON*										
101530	L-90-3T-10	3	6600	10	20-7/8	2	7.1	120	88	53
101535	L-90-3T-15	3	6600	15	20-7/8	2	7.1	120	88	63
101330	L-90-3T-20	3	6600	20	20-7/8	2	7.1	120	88	73
101331	L-90-3T-30	3	6600	30	20-7/8	2	7.1	120	88	94
5-TON*										
101550	L-90-5T-10	5	11,000	10	24-1/2	2	9	190	106	87
101555	L-90-5T-15	5	11,000	15	24-1/2	2	9	190	106	102
101350	L-90-5T-20	5	11,000	20	24-1/2	2	9	190	106	117
101351	L-90-5T-30	5	11,000	30	24-1/2	2	9	190	106	146-1/2
10-TON*										
101560	L-90-10T-11-1/2	10	22,000	11-1/2	30-1/2	4	9	385	116	182
101565	L-90-10T-20	10	22,000	20	30-1/2	4	9	385	116	225
101566	L-90-10T-30	10	22,000	30	30-1/2	4	9	385	116	178-1/2

*Custom lifts available in all capacities in 5ft increments

ACCESSORIES

Manual Trolleys	See page 16
Geared Trolleys	See page 17
Beam Clamps	See page 17
Web Slings	See page 26



See page 16



See page 17



See page 17



See page 26




FEATURES

- All steel construction with a durable powder coat finish
- High strength to weight ratio
- Completely enclosed Weston type automatic brake system holds load in any position
- Easy-to-use with single hand operation and control
- Simple design makes routine inspection and maintenance easy
- Optional point hooks make this tool indispensable in shipbuilding and fabricating applications
- Freewheeling feature without load for quick load attachment
- Models with slip clutch style overload protection available
- Hardened grade 80 low wear chain
- Drop forged hooks with heavy-duty safety latches swivel 360° for easy rigging
- Proof tested with test certificate
- Complies with OSHA, ANSI/ASME B30.21 and HST-3 standards

DIMENSIONS

Model	A	B	C	D	E	H
1/4 Ton	9-1/8	3-1/2	2-3/4	3/4	2-3/4	7/8
1/2 Ton	11-7/8	4-5/16	4-13/16	1-3/16	3-1/8	1-3/8
3/4 Ton	12-7/16	5-3/4	4-15/16	2-3/8	3-7/16	1-7/16
1-1/2 Ton	14	7	5-3/4	2-7/8	4-1/8	1-3/4
3 Ton	19-3/4	8	7-9/16	3-5/8	4-5/16	2-1/8
6 Ton	24-7/16	8	9-1/4	3-5/8	4-5/16	2-9/16

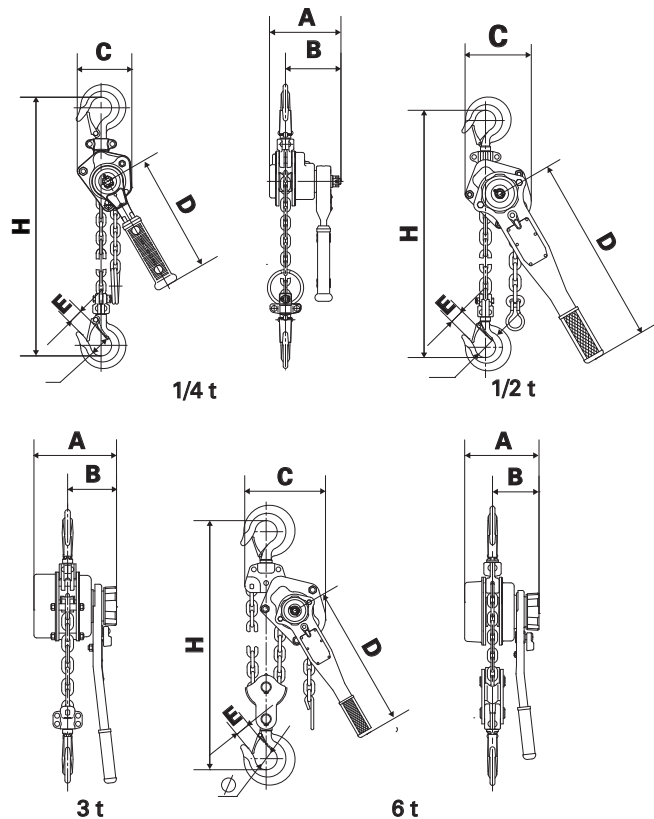

WARNING

- Always provide an adequate safety factor to handle rated load plus weight of equipment
- Do not use for lifting, supporting, transporting people, or lifting or supporting loads of people
- Before installation read and understand owners manual
- Not for use in an explosive environment





SPECIFICATIONS

Stock Number	Model Number	Capacity (tons)	Capacity (lbs)	Standard Lift (ft)	Headroom (in)	Number of Falls	Load Chain (dia/mm)	Lever Length (in)	Pounds of Pull To Lift Capacity	Lift Per Full Turn of Lever (in)	Weight (lbs)
1/4-TON*											
187730	JLP-25-5	1/4	550	5	9-1/8	1	4	6-1/4	57	2-3/4	5
1/2-TON*											
187705	JLP-50-5	1/2	1100	5	12	1	5	11-1/4	79	3-1/2	11
187706	JLP-50-10	1/2	1100	10	12	1	5	11-1/4	79	3-1/2	13
3/4-TON*											
187707	JLP-75-5	3/4	1650	5	12-7/16	1	6	11-1/4	32	3/4	15
187708	JLP-75-10	3/4	1650	10	12-7/16	1	6	11-1/4	32	3/4	18
187709	JLP-75-15	3/4	1650	15	12-7/16	1	6	11-1/4	32	3/4	20-1/2
187710	JLP-75-20	3/4	1650	20	12-7/16	1	6	11-1/4	32	3/4	23
3/4-TON WITH OVERLOAD PROTECTION*											
187206	JLP-75WO-5	3/4	1650	5	12-7/16	1	6	11-1/4	32	3/4	16
287808	JLP74WO-10	3/4	1650	10	12-7/16	1	6	11-1/4	32	3/4	18-1/2
187208	JLP-75WO-15	3/4	1650	15	12-7/16	1	6	11-1/4	32	3/4	21
1-1/2-TON*											
187711	JLP-150-5	1-1/2	3300	5	14-5/16	1	8	16-3/8	42	7/8	24
187712	JLP-150-10	1-1/2	3300	10	14-5/16	1	8	16-3/8	42	7/8	29
187713	JLP-150-15	1-1/2	3300	15	14-5/16	1	8	16-3/8	42	7/8	33-1/2
187714	JLP-150-20	1-1/2	3300	20	14-5/16	1	8	16-3/8	42	7/8	38
1-1/2-TON WITH OVERLOAD PROTECTION*											
187215	JLP-150WO-5	1-1/2	3300	5	14-5/16	1	8	16-3/8	42	7/8	25
287812	JLP150WO-10	1-1/2	3300	10	14-5/16	1	8	16-3/8	42	7/8	30
187217	JLP-150WO-15	1-1/2	3300	15	14-5/16	1	8	16-3/8	42	7/8	34
1-1/2-TON WITH SHIP YARD HOOKS*											
287722	JLP-150-10SH	1-1/2	3300	10	14-5/16	1	8	16-3/8	42	7/8	29
287723	JLP-150-15SH	1-1/2	3300	15	14-5/16	1	8	16-3/8	42	7/8	33-1/2
287724	JLP-150-20SH	1-1/2	3300	20	14-5/16	1	8	16-3/8	42	7/8	38
1-1/2-TON WITH OVERLOAD PROTECTION AND SHIP YARD HOOKS*											
287822	JLP-150-10SHO	1-1/2	3300	10	14-5/16	1	8	16-3/8	42	7/8	29
287823	JLP-150-15SHO	1-1/2	3300	15	14-5/16	1	8	16-3/8	42	7/8	33-1/2
287824	JLP-150-20SHO	1-1/2	3300	20	14-5/16	1	8	16-3/8	42	7/8	38
3-TON*											
187715	JLP-300-5	3	6600	5	19-5/16	1	10	16-3/8	72	5/8	44
187716	JLP-300-10	3	6600	10	19-5/16	1	10	16-3/8	72	5/8	51
187717	JLP-300-15	3	6600	15	19-5/16	1	10	16-3/8	72	5/8	59
187718	JLP-300-20	3	6600	20	19-5/16	1	10	16-3/8	72	5/8	66
3-TON WITH OVERLOAD PROTECTION*											
187230	JLP-300WO-5	3	6600	5	19-5/16	1	10	16-3/8	72	5/8	45
287816	JLP-300WO-10	3	6600	10	19-5/16	1	10	16-3/8	72	5/8	52
187232	JLP-300WO-15	3	6600	15	19-5/16	1	10	16-3/8	72	5/8	60
3-TON WITH SHIP YARD HOOKS*											
287726	JLP-300-10SH	3	6600	10	19-5/16	1	10	16-3/8	72	5/8	51
287727	JLP-300-15SH	3	6600	15	19-5/16	1	10	16-3/8	72	5/8	59
287728	JLP-300-20SH	3	6600	20	19-5/16	1	10	16-3/8	72	5/8	66
3-TON WITH OVERLOAD PROTECTION AND SHIP YARD HOOKS*											
287826	JLP-300-10SHO	3	6600	10	19-5/16	1	10	16-3/8	72	5/8	51
287827	JLP-300-15SHO	3	6600	15	19-5/16	1	10	16-3/8	72	5/8	58
287828	JLP-300-20SHO	3	6600	20	19-5/16	1	10	16-3/8	72	5/8	66
6-TON*											
187719	JLP-600-5	6	13,200	5	24-7/16	2	10	16-3/8	76	5/8	65
187720	JLP-600-20	6	13,200	20	24-7/16	2	10	16-3/8	76	5/8	110

*Custom lifts available in all capacities in 5 ft increments

ACCESSORIES - SHIP YARD HOOKS

Stock No.	Model	Description	Net Weight
187227	JTP150-TPH	Top Point Hook for JLP-150 Only	2
187228	JTP150-BPH	Bottom Point Hook for JLP-150 Only	2
187237	JTP300-TPH	Top Point Hook for JLP-300 Only	4
187238	JTP300-BPH	Bottom Point Hook for JLP-300 Only	4




FEATURES

- Compact size fits easily in a truck or tool box
- Dependable, lightweight and portable heavy-duty lever hoist for industrial applications
- 1/4 to 6 ton capacities
- All steel construction with a durable powder coat finish
- Simple design makes routine inspection and maintenance easy
- Free wheeling feature, without load, for quick load attachment
- Hardened grade 80 load chain
- Completely enclosed Weston type automatic brake system for precise load positioning
- Wide throat hooks feature heavy-duty latches for easy rigging
- Proof tested with test certificate
- Complies with OSHA, ANSI/ASME B30.21 and HST-2 standards
- Custom lifts available in all capacities in 5ft increments

DIMENSIONS

Model	A	B	C	D	E
1/4 Ton	9-1/8	3-1/2	2-3/4	3/4	2-3/4
1/2 Ton	11-7/8	4-5/16	4-13/16	1-3/16	3-1/8
3/4 Ton	12-7/16	5-3/4	4-15/16	2-3/8	3-7/16
1-1/2 Ton	14	7	5-3/4	2-7/8	4-1/8
3 Ton	19-3/4	8	7-9/16	3-5/8	4-5/16
6 Ton	24-7/16	8	9-1/4	3-5/8	4-5/16

Model	F	G	H	I	J
1/4 Ton	3	10-1/4	7/8	1/2	3/4
1/2 Ton	4-3/4	10-1/4	1-3/8	1/2	3/4
3/4 Ton	5	10-1/4	1-7/16	9/16	1
1-1/2 Ton	6	16-1/8	1-3/4	11/16	1-1/4
3 Ton	8-1/2	16-1/8	2-1/8	1	1-3/4
6 Ton	8-1/2	16-1/8	2-9/16	1-1/8	1-3/4

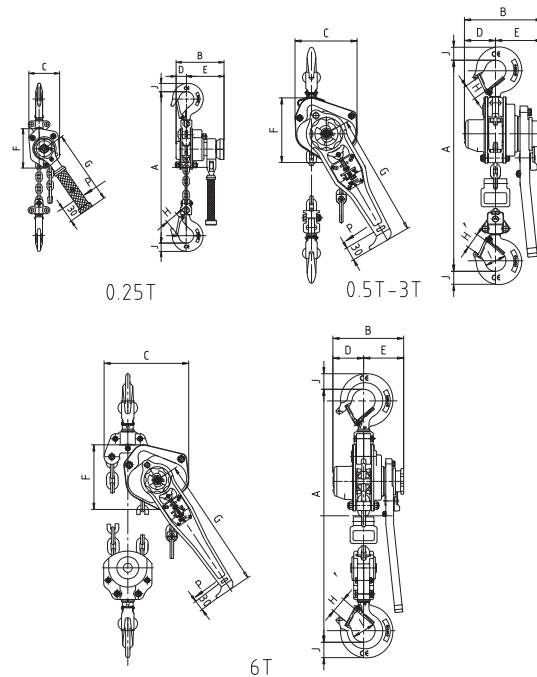

WARNING

- Always provide an adequate safety factor to handle rated load plus weight of equipment
- Do not use for lifting, supporting, transporting people, or lifting or supporting loads of people
- Before installation read and understand owners manual
- Not for use in an explosive environment





SPECIFICATIONS

Stock Number	Model Number	Capacity (tons)	Capacity (lbs)	Standard Lift (ft)	Headroom (in)	Number of Falls	Load Chain (dia/mm)	Lever Length (in)	Pounds of Pull To Lift Capacity	Lift Per Full Turn of Lever (in)	Weight (lbs)
1/4-TON*											
297625	MM-25S-5	1/4	550	5	9-3/8	1	4	6.3	65	3	4
297626	MM-25S-10	1/4	550	10	9-3/8	1	4	6.3	65	3	5-1/4
1/2-TON*											
297650	MM-50S-5	1/2	1100	5	10-1/2	1	5	9.25	45	1	12
297652	MM-50S-10	1/2	1100	10	10-1/2	1	5	9.25	45	1	14
297654	MM-50S-15	1/2	1100	15	10-1/2	1	5	9.25	45	1	15-1/2
297653	MM-50S-20	1/2	1100	20	10-1/2	1	5	9.25	45	1	18-1/2
3/4-TON*											
297575	MM-75S-5	3/4	1650	5	12	1	6	9.25	53	1/2	16
297520	MM-75S-10	3/4	1650	10	12	1	6	9.25	53	1/2	18-1/4
297529	MM-75S-15	3/4	1650	15	12	1	6	9.25	53	1/2	21
297521	MM-75S-20	3/4	1650	20	12	1	6	9.25	53	1/2	23-1/2
1-1/2-TON*											
297525	MM-150S-5	1-1/2	3300	5	13-3/4	1	8	11	56	5/8	24-1/4
297522	MM-150S-10	1-1/2	3300	10	13-3/4	1	8	11	56	5/8	28
297526	MM-150S-15	1-1/2	3300	15	13-3/4	1	8	11	56	5/8	31-1/2
297523	MM-150S-20	1-1/2	3300	20	13-3/4	1	8	11	56	5/8	35-1/4
3-TON*											
297530	MM-300S-5	3	6600	5	17-7/8	1	10	14.57	86	3/4	45
297532	MM-300S-10	3	6600	10	17-7/8	1	10	14.57	86	3/4	52
297535	MM-300S-15	3	6600	15	17-7/8	1	10	14.57	86	3/4	59
297533	MM-300S-20	3	6600	20	17-7/8	1	10	14.57	86	3/4	66
6-TON*											
297560	MM-600S-5	6	13,200	5	22	2	10	14.57	95	3/8	68
297562	MM-600S-20	6	13,200	20	22	2	10	14.57	95	3/8	82

*Custom lifts available in all capacities in 5 ft increments

ACCESSORIES


Manual Trolleys	See page 16
Geared Trolleys	See page 17
Beam Clamps	See page 17
Web Slings	See page 26



See page 16




See page 17



See page 17



See page 26




- A. Hook Swivels 360°
- B. Optional Overload Protection
- C. 100 Grade Chain
- D. Cast Safety Latches
- E. Fused Brake Discs
- F. Caged Needle Bearing Supported Drive Pinion
- G. Optional Shipyards Hooks

FEATURES

- Light weight, compact lever hoist designed for years of trouble free service
- Premium grade 100 chain for extreme wear resistance
- Patented fused brake design for low maintenance
- Caged needle bearings used on load sprocket for ease of use and efficiency
- Free wheeling feature, without load, for quick load attachment
- Drop forged hooks with cast safety latches swivel 360 degrees for easy rigging
- Overload protection and shipyards hooks available on select models
- Custom lifts available in all capacities in 5ft increments

DIMENSIONS

Model	A	B	C	D	E	F
.8 Ton	5-3/4	3-7/8	4-5/8	9-5/8	7/8	1.437
1 Ton	5-3/4	3-7/8	4-5/8	9-5/8	1-1/8	1.673
1.6 Ton	6-1/4	3-7/8	4-15/16	10-3/8	1-1/4	1.673
2.5 Ton	6-3/4	4-1/8	5-7/8	10-3/8	1-3/8	1.85
3.2 Ton	7-1/2	4-3/8	6-1/4	16-5/16	1-1/2	1.968
6.3 Ton	7-1/2	4-3/8	8-1/2	16-5/16	1-15/16	2.362

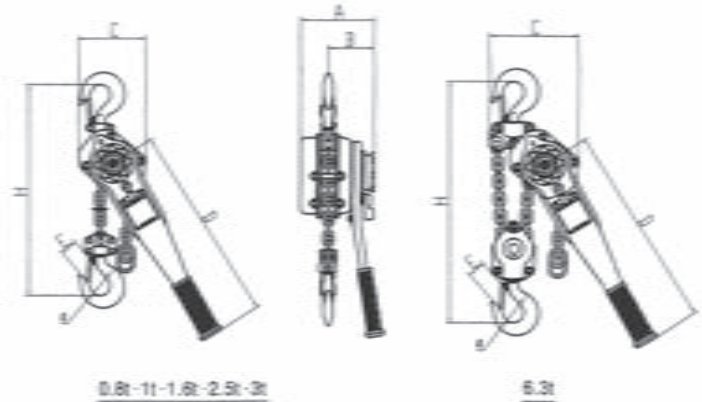

ACCESSORIES

Manual Trolleys	See page 16
Geared Trolleys	See page 17
Beam Clamps	See page 17
Web Slings	See page 26



See page 16



See page 17



See page 17



See page 26

WARNING

- Always provide an adequate safety factor to handle rated load plus weight of equipment
- Do not use for lifting, supporting, transporting people, or lifting or supporting loads of people
- Before installation read and understand owners manual
- Not for use in an explosive environment

SPECIFICATIONS

Stock Number	Model Number	Capacity (tons)	Capacity (lbs)	Standard Lift (ft)	Headroom (in)	Number of Falls	Load Chain (dia/mm)	Lever Length (in)	Pounds of Pull To Lift Capacity	Lift Per Full Turn of Lever (in)	Weight (lbs)
.8-TON*											
275050	JLH-80-5	0.8	1760	5	11	1	5.6	9-5/8	64	1-1/8	12-1/2
275010	JLH-80-10	0.8	1760	10	11	1	5.6	9-5/8	64	1-1/8	15
275015	JLH-80-15	0.8	1760	15	11	1	5.6	9-5/8	64	1-1/8	17
275020	JLH-80-20	0.8	1760	20	11	1	5.6	9-5/8	64	1-1/8	19-1/2
.8-TON WITH OVERLOAD PROTECTION*											
375010	JLH-80WO-10	0.8	1760	10	11	1	5.6	9-5/8	64	1-1/8	15
375015	JLH-80WO-15	0.8	1760	15	11	1	5.6	9-5/8	64	1-1/8	17
375020	JLH-80WO-20	0.8	1760	20	11	1	5.6	9-5/8	64	1-1/8	19-1/2
1-TON*											
210050	JLH-100-5	1	2200	5	11.8	1	5.6	9-5/8	79	1-1/8	13
210010	JLH-100-10	1	2200	10	11.8	1	5.6	9-5/8	79	1-1/8	15-1/4
210015	JLH-100-15	1	2200	15	11.8	1	5.6	9-5/8	79	1-1/8	17-1/2
210020	JLH-100-20	1	2200	20	11.8	1	5.6	9-5/8	79	1-1/8	20
1-TON WITH OVERLOAD PROTECTION*											
310010	JLH-100WO-10	1	2200	10	11.8	1	5.6	9-5/8	79	1-1/8	15
310015	JLH-100WO-15	1	2200	15	11.8	1	5.6	9-5/8	79	1-1/8	17
310020	JLH-100WO-20	1	2200	20	11.8	1	5.6	9-5/8	79	1-1/8	20
1.6-TON*											
215005	JLH-160-5	1.6	3520	5	13.1	1	7.1	10-3/8	75	7/8	17-1/2
215010	JLH-160-10	1.6	3520	10	13.1	1	7.1	10-3/8	75	7/8	21-1/4
215015	JLH-160-15	1.6	3520	15	13.1	1	7.1	10-3/8	75	7/8	25
215020	JLH-160-20	1.6	3520	20	13.1	1	7.1	10-3/8	75	7/8	28-1/2
1.6-TON WITH SHIP YARD HOOKS											
235010	JLH-160-10SH	1.6	3520	10	13.1	1	7.1	10-3/8	75	7/8	21-1/4
235015	JLH-160-15SH	1.6	3520	15	13.1	1	7.1	10-3/8	75	7/8	25
235020	JLH-160-20SH	1.6	3520	20	13.1	1	7.1	10-3/8	75	7/8	29
1.6-TON WITH OVERLOAD PROTECTION*											
315010	JLH-160WO-10	1.6	3520	10	13.1	1	7.1	10-3/8	75	7/8	21-1/4
315015	JLH-160WO-15	1.6	3520	15	13.1	1	7.1	10-3/8	75	7/8	25
315020	JLH-160WO-20	1.6	3520	20	13.1	1	7.1	10-3/8	75	7/8	28-1/2
1.6-TON WITH OVERLOAD PROTECTION AND SHIP YARD HOOKS*											
236010	JLH-160-10PSH	1.6	3520	10	13.1	1	7.1	10-3/8	75	7/8	21-1/4
236015	JLH-160-15PSH	1.6	3520	15	13.1	1	7.1	10-3/8	75	7/8	25
236020	JLH-160-20PSH	1.6	3520	20	13.1	1	7.1	10-3/8	75	7/8	28-1/2
2.5-TON*											
225005	JLH-250-5	2-1/2	5500	5	14.8	1	8.8	10-3/8	82	5/8	25
225010	JLH-250-10	2-1/2	5500	10	14.8	1	8.8	10-3/8	82	5/8	30-1/4
225015	JLH-250-15	2-1/2	5500	15	14.8	1	8.8	10-3/8	82	5/8	36
225020	JLH-250-20	2-1/2	5500	20	14.8	1	8.8	10-3/8	82	5/8	41-1/2
2.5-TON WITH OVERLOAD PROTECTION*											
325010	JLH-250WO-10	2-1/2	5500	10	14.8	1	8.8	10-3/8	82	5/8	30-1/4
325015	JLH-250WO-15	2-1/2	5500	15	14.8	1	8.8	10-3/8	82	5/8	36
325020	JLH-250WO-20	2-1/2	5500	20	14.8	1	8.8	10-3/8	82	5/8	41-1/2
3.2-TON*											
230005	JLH-320-5	3.2	7040	5	15.5	1	10	16-5/16	82	3/4	30
230010	JLH-320-10	3.2	7040	10	15.5	1	10	16-5/16	82	3/4	37-1/2
230015	JLH-320-15	3.2	7040	15	15.5	1	10	16-5/16	82	3/4	45
230020	JLH-320-20	3.2	7040	20	15.5	1	10	16-5/16	82	3/4	53
3.2-TON WITH SHIP YARD HOOKS											
240010	JLH-320-10SH	3.2	7040	10	15.5	1	10	16-5/16	82	3/4	37-1/2
240015	JLH-320-15SH	3.2	7040	15	15.5	1	10	16-5/16	82	3/4	45-1/4
240020	JLH-320-12SH	3.2	7040	20	15.5	1	10	16-5/16	82	3/4	53
3.2-TON WITH OVERLOAD PROTECTION*											
330100	JLH-320WO-10	3.2	7040	10	15.5	1	10	16-5/16	82	3/4	68
330150	JLH-320WO-15	3.2	7040	15	15.5	1	10	16-5/16	82	3/4	45-1/4
330200	JLH-320WO-20	3.2	7040	20	15.5	1	10	16-5/16	82	3/4	53
3.2-TON WITH OVERLOAD PROTECTION AND SHIP YARD HOOKS*											
332010	JLH-320-10PSH	3.2	7040	10	15.5	1	10	16-5/16	82	3/4	37-1/2
332015	JLH-320-15PSH	3.2	7040	15	15.5	1	10	16-5/16	82	3/4	45
332020	JLH-320-20PSH	3.2	7040	20	15.5	1	10	16-5/16	82	3/4	53
6.3-TON*											
260005	JLH-630-5	6.3	13860	5	21.2	2	10	16-5/16	84	3/8	57-1/4
260010	JLH-630-10	6.3	13860	10	21.2	2	10	16-5/16	84	3/8	72
260015	JLH-630-15	6.3	13860	15	21.2	2	10	16-5/16	84	3/8	88
260020	JLH-630-20	6.3	13860	20	21.2	2	10	16-5/16	84	3/8	103
6.3-TON WITH OVERLOAD PROTECTION*											
360010	JLH-630WO-10	6.3	13860	10	21.2	2	10	16-5/16	84	3/8	72
360015	JLH-630WO-15	6.3	13860	15	21.2	2	10	16-5/16	84	3/8	87-1/2
360020	JLH-630WO-20	6.3	13860	20	21.2	2	10	16-5/16	84	3/8	103

*Custom lifts available in all capacities in 5 ft increments

HDT SERIES HEAVY-DUTY & PT SERIES INDUSTRIAL-DUTY PLAIN TROLLEYS



PLAIN TROLLEYS



262005



252005



HDT SERIES HEAVY-DUTY PLAIN TROLLEY FEATURES

- 1/2-ton through 5-ton capacities
- Multiple spacer washers make beam flange wide adjustment quick and easy
- Hardened wheels with lubricated for life, double sealed ball bearings
- For use with wide-flange H-beams, standard I beams or curved track
- Proof tested with test certificate
- Complies with OSHA, ANSI/ASME B30.11 and B30.17 standards

SPECIFICATIONS

Stock Number	Model	Capacity (ton)	Capacity (lbs)	Beam Flange Width (in)	Beam Height (in)	Minimum Radius Curve (in)	Weight (lbs)
262005	1/2-HDT	1/2	1100	2-1/2 - 8	3 - 24-1/2	35	11
262010	1-HDT	1	2200	3 - 8	5 - 24-1/2	39	17
262020	2-HDT	2	4400	3-1/4 - 8	6 - 24-1/2	43	31
262030	3-HDT	3	6600	4 - 8	8 - 24-1/2	51	51
262050	5-HDT	5	11,000	4-5/8 - 8	10 - 24-1/2	55	87

DIMENSIONS

Model	A	B	C	D	E	F	G	H	I	J
1/2 Ton	7-3/8	5-7/8	5-7/8	4-5/8	2-1/16	3-9/16	2-1/2-8	4	1-1/4	15/16
1 Ton	8-3/8	6-1/4	6-1/4	5-1/8	2-1/2	3-15/16	3 - 8	4-11/16	1-11/16	1-3/16
2 Ton	10-3/16	6-1/2	6-1/2	6-5/16	3-1/16	4-13/16	3-1/4-8	5-3/8	2	1-1/2
3 Ton	12-3/8	6-7/8	6-7/8	7-7/16	3-15/16	5-15/16	4 - 8	6-7/16	2-9/16	1-3/4
5 Ton	14-9/16	7-3/8	7-3/8	8-9/16	4-3/4	6-7/8	4-5/8-8	7-11/16	3-3/8	2-1/2

PT SERIES INDUSTRIAL-DUTY PLAIN TROLLEY FEATURES


- Designed for low maintenance and trouble free operation through a wide range of beams
- 1/2 ton to 10 ton capacities
- For use with wide flange H-beams, standard I-beams, or curved track
- Multiple spacer washers make beam flange width adjustment quick and easy
- Rugged steel side plates feature built in bumper guards
- Hardened wheels with lubricated for life, double sealed ball bearings
- Proof tested with test certificate
- Complies with OSHA, ANSI/ASME B30.11 and B30.17 standards


SPECIFICATIONS

Stock Number	Model	Capacity (ton)	Capacity (lbs)	Beam Flange Width (in)	Beam Height (in)	Minimum Radius Curve (in)	Weight (lbs)
252005	1/2-PT	1/2	1100	2-1/2 - 8	4 - 19	39	18
252010	1-PT	1	2200	3 - 8	4 - 19	39	32
252015	1-1/2-PT	1-1/2	3300	3-1/4 - 8	4 - 19	43	39
252020	2-PT	2	4400	3-1/4 - 8	4 - 19	43	50
252030	3-PT	3	6600	4 - 8	5 - 19	51	85
252050	5-PT	5	11,000	4-5/8 - 8	5 - 19	55	125
252060	10-PT	10	22,000	4-3/4 - 8	5 - 19	67	208

DIMENSIONS

Model	A	B	C	D	E	F	G	H	I	J
1/2 Ton	8-3/8	6-3/16	6-3/16	5-1/8	2-5/16	4	2-1/2 - 8	4	1-9/16	15/16
1 Ton	9-15/16	6-1/2	6-1/2	6-1/8	2-15/16	4-5/8	3 - 8	4-1/2	1-15/16	1-3/16
1-1/2 Ton	10-7/8	6-5/8	6-5/8	6-3/8	3-3/8	4-7/8	3-1/4 - 8	5-1/8	2-1/2	1-5/16
2 Ton	11-7/8	6-7/8	6-7/8	6-11/16	3-9/16	5-3/8	3-1/4 - 8	5-1/4	2-9/16	1-7/16
3 Ton	13-5/8	7-5/16	7-5/16	8-9/16	4-5/16	6-3/16	4 - 8	6-5/8	3	1-3/4
5 Ton	15-1/16	7-7/8	7-7/8	10-1/16	4-13/16	6-3/4	4-5/8-8	7-7/8	3-13/16	2-3/8
10 Ton	17-15/16	8-1/2	8-1/2	11-5/8	5-15/16	7-7/8	4-3/4-8	10-1/8	5	3-1/4

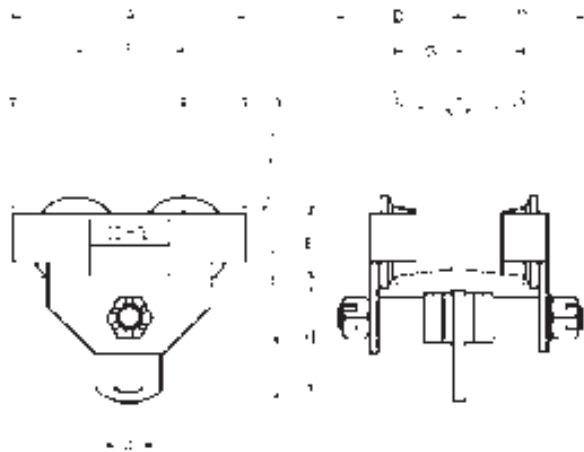

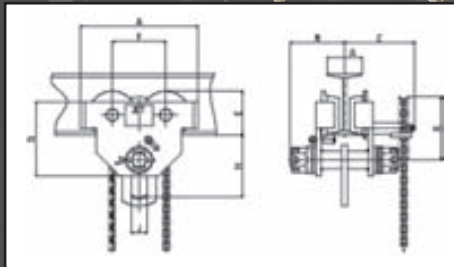

GT SERIES INDUSTRIAL-DUTY GEARED TROLLEYS

- Hand chain gear system provides precision load spotting through a wide range of beams
- For use with wide-flange H-beams, standard I-beams, or curved track
- 10' hand chain drop standard except for 1/2 GT, custom length lifts available
- Rugged steel side plates feature built-in bumper
- Hardened wheels with lubricated for life, double sealed ball bearings
- Compliance: OSHA, ANSI/ASME B30.11 and B30.17 standards guards

SPECIFICATIONS

Stock Number	Model	Capacity (ton)	Capacity (lbs)	Chain Length (ft)	Beam Flange Width (in)	Beam Height (in)	Minimum Radius Curve (in)	Weight (lbs)
252205	1/2-GT	1/2	1100	8	3 - 6	4 - 19	39	30
252210	1-GT	1	2200	10	3-1/4 - 8	4 - 19	39	44
252220	2-GT	2	4400	10	3-1/2 - 8	4 - 19	43	62
252230	3-GT	3	6600	10	5 - 8	5 - 19	51	106
252250	5-GT	5	11,000	10	5 - 8	5 - 19	55	143
252260	10-GT	10	22,000	10	6 - 8	5 - 19	67	225

GT TROLLEYS DIMENSIONS

Model	A	B	C	D	E	F	G	H	I	J	K
1/2 Ton	8-3/8	5-3/16	7-15/16	5-1/8	2-5/16	4	3-6	4	1-9/16	15/16	5-3/16
1 Ton	9-15/16	6-1/2	9	6-1/8	2-15/16	4-5/8	3-1/4-8	4-1/2	1-15/16	1-3/16	5-3/16
2 Ton	11-7/8	6-7/8	9	6-11/16	3-9/16	5-3/8	3-1/2-8	5-1/4	2-9/16	1-7/16	5-3/16
3 Ton	13-5/8	7-5/16	9-15/16	8-9/16	4-5/16	6-3/16	5-8	6-5/8	3	1-3/4	7-1/4
5 Ton	15-1/16	7-7/8	10-1/16	10-1/16	4-13/16	6-3/4	5-8	7-7/8	3-13/16	2-3/8	7-1/4
10 Ton	17-15/16	8-1/2	10-7/8	11-5/8	5-15/16	7-7/8	6-8	10-1/8	5	3-1/4	8-1/4

HBC HEAVY-DUTY AND JBC SERIES INDUSTRIAL-DUTY BEAM CLAMPS

- For construction, commercial vertical or horizontal rigging operations
- 1-ton to 5-ton capacities
- Mount hoists or lift beams with portable lightweight clamp
- Adjusts with ease to fit a broad range of wide-flange H or standard I-beams
- Clamp jaw designed to distribute the load away from beam flange edge
- Low headroom with built-in suspension rod
- Proof tested with test certificate
- Complies with ANSI/ASME B30.17 and B30.20 standards

HBC SPECIFICATIONS

Stock Number	Model Number	Capacity (lbs)	Beam Flange width (in)	Max A	Min B	Max B	C	D	E	Max F	Min F	Min G	H	Ship weight
202710	HBC-1	2200	7-15/16	5-1/8	2-5/16	4	3 - 6	4	1-9/16	15/16	5-3/16	11.2	13/16	11.2
202720	HBC-2	4400	9	6-1/8	2-15/16	4-5/8	3-1/4-8	4-1/2	1-15/16	1-3/16	5-3/16	13.2	13/16	13.2
202730	HBC-3	6600	9	6-11/16	3-9/16	5-3/8	3-1/2-8	5-1/4	2-9/16	1-7/16	5-3/16	20.4	15/16	20.4
202750	HBC-5	11,000	9-15/16	8-9/16	4-5/16	6-3/16	5 - 8	6-5/8	3	1-3/4	7-1/4	24.5	1-1/8	24.5

JBC SPECIFICATIONS

252710	JBC-1	2200	2-31/32-8-23/32	9-21/32	7-3/32	14-11/64	2-3/4	13/64	9-9/32	5-5/16	3-35/64	1-3/16	13/16	12
252720	JBC-2	4400	2-31/32-8-21/32	9-21/32	7-3/32	14-11/64	2-29/32	1/4	9-9/32	5-5/16	3-35/64	1-3/16	13/16	14
252730	JBC-3	6600	3-15/16-9-2/32	11-5/8	9-27/32	17-11/32	4-21/32	5/16	10-1/4	6-11/16	4-11/32	2-11/64	1	27
252750	JBC-5	11,000	4-15/16-10-5/8	11-7/32	10-7/16	19-3/32	5-1/2	25/64	10-1/4	6-15/16	4-15/16	2-3/64	1-7/64	34



Shown with optional 4-button controller




Shown with optional electric trolley (see page 20)

FEATURES

- Designed for Commercial and industrial applications
- 1/2 ton to 5 ton capacities, single or three phase models
- Totally enclosed steel plate construction with a durable powder coat finish
- All models standard with slip clutch style overload protection
- Heavy duty ventilated motor with thermal overload protection
- 1 phase models feature thermal overload protection
- 3 phase models feature reverse phase protection
- All models come equipped with chain container
- Reliable DC electro-magnetic brake holds the load even if power is interrupted
- Quick connect wiring for power and push button controls
- Upper and lower limit switches prevent over travel
- Durable 24v push button control station with cable strain relief
- Complies with OSHA, ANSI/ASME B30.16 and HST-1 standards
- Proof tested with test certificate

DIMENSIONS

Model	A	B	C	D	E	F	H min
1/2SS	17-11/16	9-13/16	4-1/8	10-1/4	4-7/16	9-7/16	20-3/16
1SS	17-11/16	9-13/16	4-3/8	10-1/4	4-7/16	9-7/16	24-7/16
2SS	20-7/16	11-3/16	5-3/16	11-13/16	6-3/8	10-15/16	28-1/8
3SS	20-7/16	11-3/16	5-11/16	11-13/16	7-3/8	10-15/16	24-7/16
5SS	20-7/16	11-3/16	6-9/16	11-13/16	8-1/4	10-15/16	30-11/16

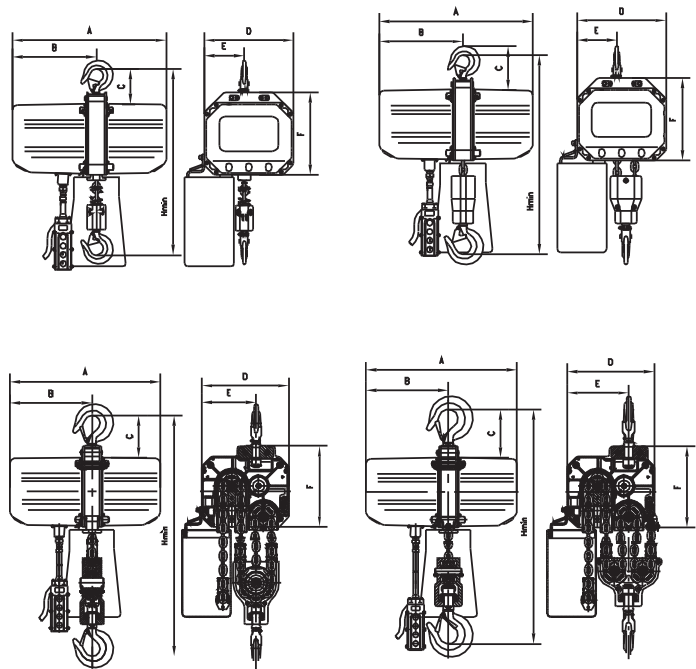

⚠ WARNING

- Always provide an adequate safety factor to handle rated load plus weight of equipment
- Do not use for lifting, supporting, transporting people, or lifting or supporting loads of people
- Before installation read and understand owners manual
- Not for use in an explosive environment

SPECIFICATIONS

Stock Number	Model Number	Standard Lift (ft)	Headroom (in)	Push Button Control cord Length (ft)	Duty Cycle	Duty Cycle Rating (H3, H4 etc)	Lifting Speed (fpm)	Motor Output (HP)	Rated Amps		Load Chain Diameter (mm)	Number of Falls	Net Weight (lbs)
									115V	230V			
1/2 TON SINGLE SPEED 1 PHASE*													
121100	1/2SS-1C-10	10	20 3/16	8	25%	H3	19.7	7/8	12.6	6	6.3	1	101 1/2
121150	1/2SS-1C-15	15	20 3/16	13	25%	H3	19.7	7/8	12.6	6	6.3	1	106
121200	1/2SS-1C-20	20	20 3/16	18	25%	H3	19.7	7/8	12.6	6	6.3	1	108
1 TON SINGLE SPEED 1 PHASE*													
111000	1SS-1C-10	10	24 7/16	8	25%	H3	19.7	1-3/4	20.8	10	8	1	161
111500	1SS-1C-15	15	24 7/16	13	25%	H3	19.7	1-3/4	20.8	10	8	1	165 1/2
112000	1SS-1C-20	20	24 7/16	18	25%	H3	19.7	1-3/4	20.8	10	8	1	172
2 TON SINGLE SPEED 1 PHASE*													
211000	2SS-1C-10	10	28 1/8	8	25%	H3	9.8	1-3/4	20.8	10	8	2	167 1/2
211500	2SS-1C-15	15	28 1/8	13	25%	H3	9.8	1-3/4	20.8	10	8	2	178 1/2
212000	2SS-1C-20	20	28 1/8	18	25%	H3	9.8	1-3/4	20.8	10	8	2	187 1/2
3 TON SINGLE SPEED 1 PHASE*													
311000	3SS-1C-10	10	31 1/2	8	25%	H3	6.6	1-3/4	20.8	10	8	3	198 1/2
311500	3SS-1C-15	15	31 1/2	13	25%	H3	6.6	1-3/4	20.8	10	8	3	214
312000	3SS-1C-20	20	31 1/2	18	25%	H3	6.6	1-3/4	20.8	10	8	3	227
5 TON													
511000	5SS-1C-10	10	30 11/16	8	25%	H3	4.9	1-3/4	22	10.5	8	4	218
511500	5SS-1C-15	15	30 11/16	13	25%	H3	4.9	1-3/4	22	10.5	8	4	238
1/2 TON SINGLE SPEED 3 PHASE*													
123100	1/2SS-3C-10	10	20-3/16	8	30%	H3	31.5	1-1/5	3.5	1.8	8	1	92 1/2
123150	1/2SS-3C-15	15	20-3/17	13	30%	H3	31.5	1-1/5	3.5	1.8	8	1	97
123200	1/2SS-3C-20	20	20-3/18	18	30%	H3	31.5	1-1/5	3.5	1.8	8	1	99
1 TON SINGLE SPEED 3 PHASE*													
131000	1SS-3C-10	10	24 7/16	8	30%	H3	24.8	2-1/7	5.9	3	8	1	150
131500	1SS-3C-15	15	24 7/16	13	30%	H3	24.8	2-1/7	5.9	3	8	1	154 1/2
132000	1SS-3C-20	20	24 7/16	18	30%	H3	24.8	2-1/7	5.9	3	8	1	161
2 TON													
231000	2SS-3C-10	10	28 1/8	8	30%	H3	12.4	2-1/7	5.9	3	8	2	156 1/2
231500	2SS-3C-15	15	28 1/8	13	30%	H3	12.4	2-1/7	5.9	3	8	2	167 1/2
232000	2SS-3C-20	20	28 1/8	18	30%	H3	12.4	2-1/7	5.9	3	8	2	176 1/2
3 TON SINGLE SPEED 3 PHASE*													
331000	3SS-3C-10	10	31 1/2	8	30%	H3	8.3	2-1/7	5.9	3	8	3	187 1/2
331500	3SS-3C-15	15	31 1/2	13	30%	H3	8.3	2-1/7	5.9	3	8	3	203
332000	3SS-3C-20	20	31 1/2	18	30%	H3	8.3	2-1/7	5.9	3	8	3	216
5 TON SINGLE SPEED 3 PHASE*													
531000	5SS-3C-10	10	30 11/16	8	30%	H3	6.2	2-1/7	5.9	3	8	4	207
531500	5SS-3C-15	15	30 11/16	13	30%	H3	6.2	2-1/7	5.9	3	8	4	227
530200	5SS-3C-20	20	30 11/16	13	30%	H3	6.2	2-1/7	5.9	3	8	4	247

*Custom lifts available in all capacities in 5 ft increments

TOTAL POSSIBLE LIFT BY MODEL

JET Model	3m (10ft)	4m (13ft)	6m (20ft)	8m (26ft)	9m (30ft)	10m (33ft)	11m (36ft)	12m (40ft)	13m (43ft)	14m (46ft)	15m (49ft)	16m (53ft)	19m (63ft)
1/2SS-1C	X	X	X	X	X	X	X	X	X	X	X	X	X
1/2SS-3C	X	X	X	X	X	X	X	X	X	X	X	X	X
1SS-1C	X	X	X	X	X	X	X	X	X	X	X	X	X
1SS-3C	X	X	X	X	X	X	X	X	X	X	X	X	X
2SS-1C	X	X	X	X	X	X	X	X	X	X	X	X	-
2SS-3C	X	X	X	X	X	X	X	X	X	X	X	X	-
3SS-1C	X	X	X	X	X	X	-	-	-	-	-	-	-
3SS-3C	X	X	X	X	X	X	-	-	-	-	-	-	-
5SS-1C	X	X	X	X	-	-	-	-	-	-	-	-	-
5SS-3C	X	X	X	X	-	-	-	-	-	-	-	-	-




Shown with optional 4-button controller

FEATURES

- Designed for commercial and industrial applications
- 1/2 ton to 5 ton capacities
- 10', 20' lifts standard. Custom lifts available in 5' increments
- Easy to install, inspect and maintain
- Totally enclosed steel plate construction with a durable powder coat finish
- Gear train features lifetime lubrication, no oil changes required
- Heavy-duty ventilated motor with thermal overload protection
- All models feature thermal overload protection and reverse phase protection
- Equipped with heavy duty chain container
- Reliable DC electromagnetic brake holds the load even if power is interrupted
- Quick connect wiring for power and push button controls
- Upper and lower limit switches prevent over travel
- Solid state starting switch for reliable operation
- All models standard with slip clutch overload protection
- Durable low voltage 24v push button control station with cable strain relief
- Complies with OSHA, ANSI/ASME B30.16 and HST-1 standards
- Proof tested with test certificate

DIMENSIONS

Model	A	B	C	D	E	F	H min
1/2SS	17-11/16	9-13/16	4-1/8	10-1/4	4-7/16	9-7/16	20-3/16
1SS	17-11/16	9-13/16	4-3/8	10-1/4	4-7/16	9-7/16	24-7/16
2SS	20-7/16	11-3/16	5-3/16	11-13/16	6-3/8	10-15/16	28-1/8
3SS	20-7/16	11-3/16	5-11/16	11-13/16	7-3/8	10-15/16	24-7/16
5SS	20-7/16	11-3/16	6-9/16	11-13/16	8-1/4	10-15/16	30-11/16

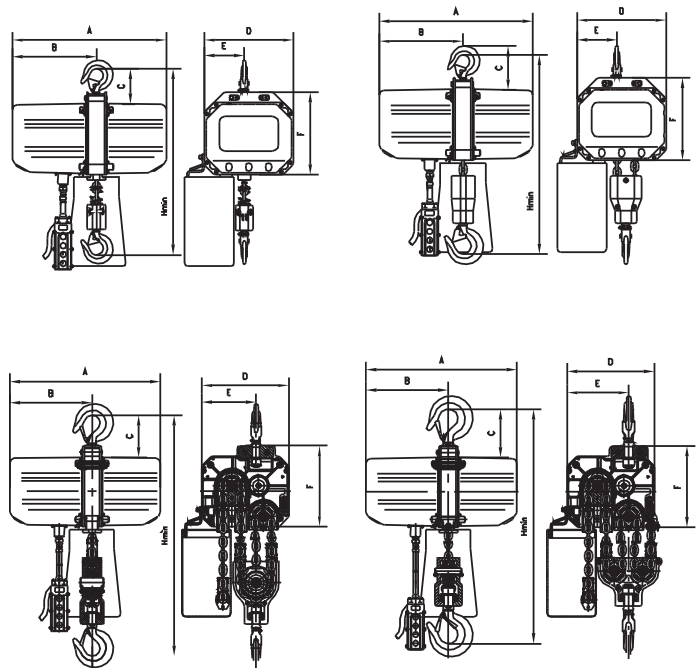

WARNING

- Always provide an adequate safety factor to handle rated load plus weight of equipment
- Do not use for lifting, supporting, transporting people, or lifting or supporting loads of people
- Before installation read and understand owners manual
- Not for use in an explosive environment



SPECIFICATIONS

Stock Number	Model Number	Standard Lift (ft)	Headroom (in)	Push Button Control cord Length (ft)	Duty Cycle	Duty Cycle Rating (H3, H4 etc)	Lifting Speed (fpm)	Motor Output (HP)	Rated Amps		Load Chain Diameter (mm)	Number of Falls	Net Weight (lbs)
1/2 TON DUAL SPEED 3 PHASE													
503100	1/2DS-3C-10	10	20-3/16	8	30%,15%	H3	31.5, 10.5	1-1/5	3.5, 1.8	4.7, 2.4	8	1	101 1/2
503200	1/2DS-3C-20	20	20-3/17	18	30%,15%	H3	31.5, 10.5	1-1/5	3.5, 1.8	4.7, 2.4	8	1	108
1 TON DUAL SPEED 3 PHASE													
103100	1DS-3C-10	10	24 7/16	8	30%,15%	H3	24.8, 8.3	2-1/7	5.9, 3	6.9, 3.5	8	1	161
103200	1DS-3C-20	20	24 7/16	18	30%,15%	H3	24.8, 8.3	2-1/7	5.9, 3	6.9, 3.5	8	1	172
2 TON DUAL SPEED 3 PHASE													
203100	2DS-3C-10	10	28 1/8	8	30%,15%	H3	12.4, 4.1	2-1/7	5.9, 3	6.9, 3.5	8	2	167 1/2
203200	2DS-3C-20	20	28 1/8	18	30%,15%	H3	12.4, 4.1	2-1/7	5.9, 3	6.9, 3.5	8	2	187 1/2
3 TON DUAL SPEED 3 PHASE													
303100	3DS-3C-10	10	31 1/2	8	30%,15%	H3	8.3, 2.8	2-1/7	5.9, 3	6.9, 3.5	8	3	198 1/2
303200	3DS-3C-20	20	31 1/2	18	30%,15%	H3	8.3, 2.8	2-1/7	5.9, 3	6.9, 3.5	8	3	227
5 TON DUAL SPEED 3 PHASE													
531010	5DS-3C-10	10	30 11/16	8	30%,15%	H3	6.2, 2.1	2-1/7	5.9, 3	6.9, 3.5	8	4	218
532020	5DS-3C-20	20	30 11/16	18	30%,15%	H3	6.2, 2.1	2-1/7	5.9, 3	6.9, 3.5	8	4	258

TOTAL POSSIBLE LIFT

JET Model	3m (10ft)	4m (13ft)	5m (160ft)	6m (20ft)	7m (23ft)	8m (26ft)	9m (30ft)	10m (33ft)	11m (36ft)	12m (40ft)	13m (43ft)	14m (46ft)	15m (49ft)	16m (53ft)	17m (56ft)	18m (59ft)	19m (63ft)	20m (66ft)
1/2DS-3C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1DS-3C	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
2DS-3C	X	X	X	X	X	X	X	X	X	X	6	X	X	X	-	-	-	-
3DS-3C	X	X	X	X	X	X	X	X	-	-	-	-	-	-	-	-	-	-
3DS-3C	X	X	X	X	X	X	-	-	-	-	-	-	-	-	-	-	-	-

ACCESSORIES

Electric Trolleys	See page 22
Push Button Controls	See page 24
Web Slings	See page 26



See page 22



See page 24



See page 26



Shown with optional 4-button controller



FEATURES


- Designed to give you single-control convenience
- Available in both 115v/230v 1 phase and 230v/460v 3 phase
- Solenoid-operated traveling brake
- Adjustable to fit various I- beams and wide flange beams
- Must be fitted with a JET 4 button, 24v control
- Durable powder coat finish
- Electric trolley not supplied with 4 push button control
- Power cable supplied by end user. Not for use in explosive environment

SPECIFICATIONS

Stock Number	Model Number	Capacity (lb)	Beam Flange Width (in)	Travel Speed (fpm)	Hook Mount Head Room	Motor	Duty Cycle Rating	Min Curve (in)	Weight (lbs)
1 PHASE TROLLEYS									
272705	1/2ET-1C	1100	3 - 5	39-1/3	6-7/8	1/2HP, 1PH, 115/230V	25%	43-5/16	93
272710	1ET-1C	2200	3 - 5	39-1/3	6-7/8	1/2HP, 1PH, 115/230V	25%	43-5/16	93
272720	2ET-1C	4400	4 - 6	39-1/3	8	1/2HP, 1PH, 115/230V	25%	59	122
272730	3ET-1C	6600	4 - 6	39-1/3	9	1HP, 1PH, 115/230V	25%	59	161
272750	5ET-1C	11000	5 - 7	39-1/3	11-3/16	1HP, 1PH, 115/230V	25%	78-3/4	218
3 PHASE TROLLEYS									
262605	1/2ET-3C	1100	3 - 5	39-1/3	6-7/8	1/2HP, 3PH, 230/460V	25%	43-5/16	88
262610	1ET-3C	2200	3 - 5	39-1/3	6-7/8	1/2HP, 3PH, 230/460V	25%	43-5/16	88
262620	2ET-3C	4400	4 - 6	39-1/3	8	1/2HP, 3PH, 230/460V	25%	59	116.6
262630	3ET-3C	6600	4 - 6	39-1/3	9	1HP, 3PH, 230/460V	25%	59	156.2
262650	5ET-3C	11000	5 - 7	39-1/3	11-3/16	1HP, 3PH, 230/460V	25%	78-3/4	213.4

ACCESSORIES

Push Button Controls	See page 24
----------------------	-------------



See page 24

⚠ WARNING

- Always provide an adequate safety factor to handle rated load plus weight of equipment
- Do not use for lifting, supporting, transporting people, or lifting or supporting loads of people
- Before installation read and understand owners manual
- Not for use in an explosive environment



105970



252200



AH SERIES PNEUMATIC HOISTS FEATURES

- Designed for commercial applications where air power is preferred
- 1/4-ton to 1-ton capacities 10' and 20' lifts standard, custom length lifts available
- Rugged yet lightweight aluminum construction
- Self-cooling 100% duty-cycle motor will not overheat
- Variable speed pull-cord control for precise load spotting
- Automatic brake system is tail mounted for easy inspection
- Upper and lower limit switches prevent over-travel
- Pendant control option for single-hand operation
- Equipped with heavy-duty chain container
- Proof tested with test certificate
- Compliance: OSHA, ANSI/ASME B30.16 and HST-5 standards

AT SERIES PNEUMATIC TROLLEY FEATURES


- Air trolley comes equipped with 6' pendant control
- Use with air hoists: AH-25C, AH-50C or AH-100C

ACCESSORIES

Push Button Controls	See page 24
Chain Bucket	See page 24



See page 24



See page 24

AH SERIES PNEUMATIC HOISTS SPECIFICATIONS

Stock Number	Model	Capacity (lbs)	Standard Lift (ft)	Number of Falls	Air Pressure (PSI)/Lifting Speed at Rated Load (fpm)	Air Consumption (cfm)	Headroom (in)	Air Inlet (npt/in)	Weight (lbs)
105970	AH-25C-10	550	10	1	85/59; 70/53, 57/46	71/53/36	17-1/8	1/2	51
105971	AH-50C-10	1100	10	1	85/39, 70/33, 57/26	71/53/36	17-1/8	1/2	51
105972	AH-50C-20	1100	20	1	85/39, 70/33, 57/26	71/53/36	17-1/8	1/2	5
105973	AH-100C-10	2200	10	2	85/20, 70/16, 57/13	71/53/36	20-7/8	1/2	57
105974	AH-100C-20	2200	20	2	85/20, 70/16, 57/13	71/53/36	20-7/8	1/2	69

AT SERIES PNEUMATIC TROLLEY SPECIFICATIONS

Stock Number	Model	Capacity (lbs)	Flange Width (in)	Minimum Beam Radius (in)	Headroom (in)	Traveling Speed with Rated Load (FPM)	Air Pressure (psi)	Air Consumption (cfm)	Air Inlet (npt/in)	Weight (lbs)
252200	AT-1000	2200	3 - 5	59	4-3/4	77, 88, 98	57, 70, 85	12, 15, 18	3/8	57

⚠ WARNING

- Always provide an adequate safety factor to handle rated load plus weight of equipment
- Do not use for lifting, supporting, transporting people, or lifting or supporting loads of people
- Before installation read and understand owners manual
- Not for use in an explosive environment



PUSH BUTTON CONTROLS FEATURES

- Purchased separately, the control cables feature 2, 4 or 6 push button stations
- Correct cable length is determined by the hoist lifting height
- Electric trolleys and control cables feature quick connect plug-in connection assemblies
- 24V wiring in the control unit
- Can be easily installed and retrofitted in the field without the aid of an electrician or additional equipment
- For ET-C Series electric trolleys

PUSH BUTTON CONTROLS SPECIFICATIONS

Stock Number	Model	Description	Hoist Type
--------------	-------	-------------	------------

SINGLE SPEED HOISTS

152410	PBC-410C	4 Button control pendant for 10' lift hoist and trolley	SS
152415	PBC-415C	4 Button control pendant for 15' lift hoist and trolley	SS
152420	PBC-420C	4 Button control pendant for 20' lift hoist and trolley	SS
152610	PBC-610C	6 Button control pendant for 10' lift hoist and trolley	SS
152615	PBC-615C	6 Button control pendant for 15' lift hoist and trolley	SS
152620	PBC-620C	6 Button control pendant for 20' lift hoist and trolley	SS

DUAL SPEED HOISTS

142410	DSPBC-410C	4 Button control pendant for 10' lift hoist and trolley	DS
142415	DSPBC-415C	4 Button control pendant for 15' lift hoist and trolley	DS
142420	DSPBC-420C	4 Button control pendant for 20' lift hoist and trolley	DS
142610	DSPBC-610C	6 Button control pendant for 10' lift hoist and trolley	DS
142615	DSPBC-615C	6 Button control pendant for 15' lift hoist and trolley	DS
142620	DSPBC-620C	6 Button control pendant for 20' lift hoist and trolley	DS

AIR HOIST PENDANT CONTROLS FEATURES

- Fits models AH - 25C, 50C, 100C
- Available in 6', 11', and 16' lengths for retrofit in the field

AIR HOIST PENDANT CONTROLS SPECIFICATIONS

Stock Number	Model	Length (ft)	Weight (lbs)
105985	AHP-10	6	5
105987	AHP-20	16	8

CHAIN BUCKETS FEATURES

- Rugged waterproof vinyl construction

CHAIN BUCKETS SPECIFICATIONS

Stock Number	Model	Description	Weight (lbs)
105901	CB-A	For all models with 10' lifts	2
105902	CB-B	For AH-25C/50C to 39' and 100C to 19'	4
105903	CB-C	For AH-25C/50C to 65' and 100C to 32'	5



PULLERS

JCP SERIES CABLE PULLERS FEATURES

- General purpose cable puller designed to lift, lower, stretch or pull heavy loads
- 1 ton to 4 ton capacities
- Lightweight zinc plated steel construction to resist corrosion
- Double solid cast aluminum ratchet wheel brake system hold load securely in any position
- Concealed spring lever control prevents accidental release
- Drop forged hooks with safety latches standard
- Aircraft quality 3/16" cable
- Snatch block included with JCP-2 and JCP-4 models
- Complies with ANSI/ASME B30.21 standards

JCP SERIES CABLE PULLERS SPECIFICATIONS

Stock Number	Model	Capacity (ton)	Lever Ratio	Maximum Lift (ft)	Lever Length (in)	Minimum Distance Between Hooks (in)	Weight (lbs)
180410	JCP-1	1	18:1	12	16-1/2	17	9
180420	JCP-2	2	36:1	5	16-1/2	21	10
180440	JCP-4	4	36:1	5	17-1/8	22	15

JCH LINESMAN PULLERS FEATURES

- Heavy Duty cable puller designed to lift, lower, stretch, or pull heavy loads
- 1.5 and 2 ton capacities available
- Drop forged hooks with safety latches standard
- Complies with ANSI/ASME B30.21 standard

JCH LINESMAN PULLERS SPECIFICATIONS

Stock Number	Model	Lever Ratio	Handle Length (in)	Cable Length (ft)	Cable Diameter (in)	Weight (lbs)
181330	JCH-3	9.47:1	25-3/16	30	1/4	14.7
181420	JCH-4	11.79:1	29-15/16	20	1/4	15.9

SINGLE LINE SPECIFICATIONS

Stock Number	Capacity (lbs)	Handle Pull For Full Load (lbs)	Lifting Distance (ft)	Minimum Distance Between Hooks (in)
181330	1500	119	30	21
181420	2000	114-1/2	20	22-1/2

DOUBLE LINE SPECIFICATIONS

181330	3000	120	15	28
181420	4000	116	10	30

JG GRIP PULLERS FEATURES

- Industrial quality grip puller designed to lift, lower or pull heavy loads
- 3/4 ton to 3 ton capacities
- Easy to use in any direction, angle or length of pull or lift
- Multiple clutch brake system holds load in any position
- Safety shear pin in telescopic handle provides automatic overload protection
- Heavy duty safety hooks with spring loaded latches
- Available with or without 66 ft of wire rope
- Complies with ANSI/ASME B30.21
- Wire Rope


JG GRIP PULLERS SPECIFICATIONS

Stock Number	Model	Pulling Capacity (lbs)	Lifting Capacity (lbs)	Handle Length (in)	Distance Per Stroke (in)	Wire Rope (dia/in)	Lifting Speed (fpm)	Weight (lbs)
286575K	JG-75A	2750	1650	29-1/2	2-9/32	5/16	10	36
286515K	JG-150A	5500	3300	41	2-3/8	7/16	10	48
286530K	JG300K	11,000	6600	46-1/2	1-1/2	5/8	10	123

WIRE ROPE SPECIFICATIONS

Stock Number	Model	Diameter (in)	Weight (lbs)
286574	WR-75A	5/16	15
286514	WR-150A	7/16	28
286529	WR-300A	5/8	41



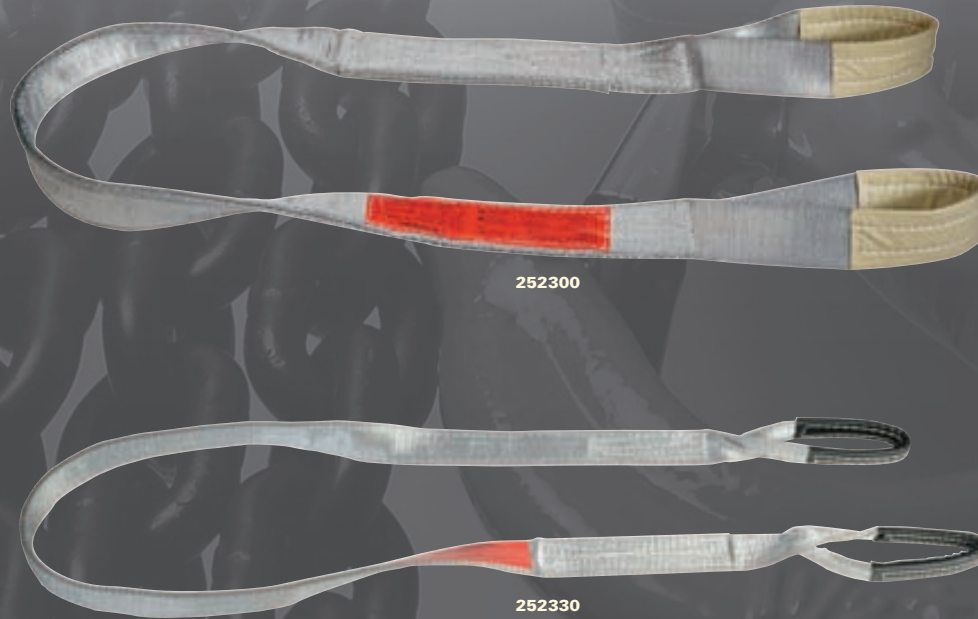

FEATURES

- Ideal for use with hoisting and rigging irregular or bulky loads
- Lightweight, flexible and easy to handle
- Heavy Duty 2 ply polyester webbing
- Red color warning core provides easy to notice warning for sling replacement
- Tapered eyes are reinforced to resist abrasion
- Type 3 (flat eye) or Type 4 (twisted eye) slings available
- Proof tested with test certificate
- Complies with OSHA and ANSI/ASME B30.9 standards

SPECIFICATIONS

Stock Number	Model	Width (in)	Length (in)	Vertical Capacity (lbs)	Choker Capacity (lbs)	Basket Capacity (lbs)	Weight (lbs)
FLAT EYE, TYPE 3, 2 PLY POLYESTER WEB SLING							
252300	WSFE-2-6	2	6	6400	5000	12,800	2
252301	WSFE-2-8	2	8	6400	5000	12,800	3
252302	WSFE-2-10	2	10	6400	5000	12,800	4
252310	WSFE-3-6	3	6	8600	6900	17,200	3
252311	WSFE-3-8	3	8	8600	6900	17,200	4
252312	WSFE-3-10	3	10	8600	6900	17,200	5
252320	WSFE-4-8	4	8	11,500	9200	23,000	5
252321	WSFE-4-10	4	10	11,500	9200	23,000	6
252322	WSFE-4-12	4	12	11,500	9200	23,000	7
TWISTED EYE, TYPE 4, 2 PLY POLYESTER WEB SLING							
252330	WSTE-2-6	2	6	6400	5000	12,800	2
252331	WSTE-2-8	2	8	6400	5000	12,800	3
252332	WSTE-2-10	2	10	6400	5000	12,800	3
252340	WSTE-3-6	3	6	8600	6900	17,200	3
252341	WSTE-3-8	3	8	8600	6900	17,200	4
252342	WSTE-3-10	3	10	8600	6900	17,200	5
252350	WSTE-4-8	4	8	11,500	9200	23,000	6
252351	WSTE-4-10	4	10	11,500	9200	23,000	6
252352	WSTE-4-12	4	12	11,500	9200	23,000	8

WARRANTY AND SERVICE



WMH Tool Group, Inc., warrants every product it sells. If one of our tools needs service or repair, one of our Authorized Service Centers located throughout the United States can give you quick service. In most cases, any of these WMH Tool Group Authorized Service Centers can authorize warranty repair, assist you in obtaining parts, or perform routine maintenance and major repair on your JET® tools. For the name of an Authorized Service Center in your area call 1-800-274-6848.

MORE INFORMATION

WMH Tool Group is consistently adding new products to the line. For complete, up-to-date product information, check with your local WMH Tool Group distributor, or visit jettools.com.

WARRANTY

JET products carry a limited warranty which varies in duration based upon the product.

 <p>2 YEAR WARRANTY</p>	 <p>5 YEAR WARRANTY</p>
<ul style="list-style-type: none"> Cable Pullers Hoists - Air Hoists - Electric Trolleys - Air Trolleys - Electric Web Slings 	<ul style="list-style-type: none"> Beam Clamps Chain Hoist - Manual Lever Hoists Pullers - JCH Models Trolleys - Geared Trolleys - Plain Winches - Manual

WHAT IS COVERED?

This warranty covers any defects in workmanship or materials subject to the exceptions stated below.

Abrasives and other consumables are excluded from warranty coverage.

WHO IS COVERED?

This warranty covers only the initial purchaser of the product.

WHAT IS THE PERIOD OF COVERAGE?

The general JET warranty lasts for the time period specified in the product literature of each product.

WHAT IS NOT COVERED?

This warranty does not cover defects due directly or indirectly to misuse, abuse, negligence or accidents, normal wear-and-tear, improper repair or alterations, or lack of maintenance.

HOW TO GET SERVICE

The product or part must be returned for examination, postage prepaid, to a location designated by us. For the name of the location nearest you, please call 1-800-274-6848.

You must provide proof of initial purchase date and an explanation of the complaint must accompany the merchandise. If our inspection discloses a defect, we will repair or replace the product, or refund the purchase price, at our option.

We will return the repaired product or replacement at our expense unless it is determined by us that there is no defect, or that the defect resulted from causes not within the scope of our warranty in which case we will, at your direction, dispose of or return the product. In the event you choose to have the product returned, you will be responsible for the shipping and handling costs of the return.

HOW STATE LAW APPLIES

This warranty gives you specific legal rights; you may also have other rights which vary from state to state.

LIMITATIONS ON THIS WARRANTY

WMH TOOL GROUP LIMITS ALL IMPLIED WARRANTIES TO THE PERIOD OF THE LIMITED WARRANTY FOR EACH PRODUCT. EXCEPT AS STATED HEREIN, ANY IMPLIED WARRANTIES OR MERCHANTABILITY AND FITNESS ARE EXCLUDED. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG THE IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

WMH TOOL GROUP SHALL IN NO EVENT BE LIABLE FOR DEATH, INJURIES TO PERSONS OR PROPERTY, OR FOR INCIDENTAL, CONSEQUENTIAL, SPECIAL, OR CONSEQUENTIAL DAMAGES ARISING FROM THE USE OF OUR PRODUCTS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

WMH Tool Group sells through distributors only. The specifications in WMH catalogs are given as general information and are not binding. Members of WMH Tool Group reserve the right to effect at any time, without prior notice, those alterations to parts, fittings, and accessory equipment which they may deem necessary for any reason whatsoever. **JET® branded products are not sold in Canada by WMH Tool Group.**

Kirby Fix-It
409 East Central Ave
Jamestown, TN 38556
931-879-7414
8AM-5PM M-F Sat-8-12

Machine Tool Fitters
911 Davidson ST
Tullahoma, TN 37388
(931) 461-8974
7 - 3:30 M-F

Machine Tool Services
930 Griselda Drive
Maryville, TN 37801
865-982-9436

Reeves Power Tool
Repair, Inc.
108 Lafayette Street
Nashville, TN 37210
615-256-8817
7-430 Mon-Friday

Service First Inc.
1521 Foust St.
Chattanooga, TN 37404
(423) 624-2272
7:30 - 4:30 M-F

Shelby Electric Co. Inc.
112 East E.H. Crump Blvd.
Memphis, TN 38106
(901) 947-7339
800-451-3548
8-5 M-F

Superior Forklift
1004 W. Main St.
Jonesborough, TN 37659
423-753-5217
8-5 M-F
24hr serv. If needed

SYS-Tech, Inc
1481 Redwood Dr NE
Cleveland, TN 37312
(423) 472-6355

Tennessee Armature
& Electric
1301 Galway Street
Knoxville, TN 37917
865-524-3681
7:30-5 M-F

Tool Serve of Middle
Tennessee
2404 Gallatin Pike North
Madison, TN 37115
(615) 826-4770
8:00am -5:00pm
Mon - Friday

TEXAS

Advanced Overhead
Crane Services
22531 FM 2100
Crosby, TX 77532
281-324-3392
(800) 413-2103
8-5 M-F

Advantage Machine Sales
13421 Emu Lane
Justin, TX 76247
(940) 395-0715
(940) 395-0715
8:00 - 5:00 M-F

Air-Draulics
638 Fairfield Street
La Porte, TX 77571
713-471-9261

Algo Crane
6008 W 34th St Ste Q
Houston, TX 770926427
713-699-9190
800-422-9190
8-5 M-F

American Tool & Fastener
1331 E. Plano Parkway
Suite B
Plano, TX 75074
(972) 801-9909
800-766-2279
7:30 AM - 6 PM

B & J Tool Repair Co
4422 Baldwin Blvd
Corpus Christi, TX 78408
361-883-2775
7:30-5

Bellaire Hydraulics, Inc.
1605 Miller St.
Houston, TX 77003
713-229-0552

Best Material Handling
5450 Navigation
Houston, TX 77011
713-926-7666
8-5 M-F

C Ring & Pinion Inc
254 S. Navigation
Corpus Christi, TX 78405
(361) 884-1178

Caprock Equipment Ser.
& Supply
2112 50th St.
Lubbock, TX 79412
806-747-9177
7:30-5:30 M-F

Cliffs Services
813 Lake Road
Waskom, TX 75692
903-687-2498
9:00am - 5:00pm
M - F

Corpus Christi Power Tool
3701 Agnes
Corpus Christi, TX 78405
361-883-1117

DoAll Houston Company
5512 Gulf Freeway
Houston, TX 77023
(888) 362-5572
8-5 M-F

East Texas Distributors
301 East Lomax Dr.
Longview, TX 75603
903-643-3660
8-5 Mon Friday

G.E.M. Aero Tech
2308 Marys Creek Ct.
Pearland, TX 77581
281-485-9972

Gaffey Inc. of Texas
1436 N. Duck Creek Rd.
Cleveland, TX 77327
713-443-6690

H & H Tool Service Inc.
2307 McAllister Rd
Houston, TX 77092
713-682-8665

Houston Tool & Hoist
1401 Boyles Drive
Houston, TX 77020
713-674-0912 800-444-2199
8-4:30

Hydraulic Equipment
Svc. Co.
1021 North San Jacinto
Street
Houston, TX 77002
(713) 228-9601

Hydro-Pneumatic
Services, Inc.
1312 Corporate Dr. East
Suite E
Arlington, TX 76006
817-640-8950

Imperial Electric
Motor Serv.
905 E. Tyler St
Brownsville, TX 78520
956-546-4523
877-850-7828
7:30-5

Industrial Crane
& Maintenance
Rt. 4, 1100 So. Brooks
Brazoria, TX 77422
409-798-7077
800-766-7077

J & T Tool & Supply
5317 Inker St.
Houston, TX 77007
713-880-8013

LaPorte Tool Works, Inc.
312 S. 2nd
LaPorte, TX 77571
281-470-7389
8-5 M-F

Larry Tool Repair
2916 Dow Circle
Deer Park, TX 77536
281-479-4086
8-5 M-F

Lyons Machine
Tool Repair
11390 Harvill Dr
Conroe, TX 77303
936-827-0318
7 am-5 pm

Mainland Tool &
Supply, Inc.
2830 FM 1765
Texas City, TX 77590
409-948-4497
8-5 M-F 8-3 Sat.

MTS Tool Service
1320 Hwy 3 S., Ste A
League City, TX 77573
281-332-1051 877-664-5200
8-5 M-F

Mueller Hydraulic Service
515 North Hackberry
San Antonio, TX 78202
210-224-5271

Neff Rental
1622 West 2nd
Odessa, TX 79763
915-333-3648

Otto Dukes Tools
2556 Agnes
Corpus Christi, TX 78405
(361) 883-0921
(800) 673-8537
7-5 M-F

Permian Tool Repair
803 W. 67th ST.
Odessa, TX 79764
(915) 366-7911
8-12/1-5pm M-F

Perpetual Equipment
Services Inc.
941 Madrona Ranch Rd
Pipe Creek, TX 78063
(830) 510-2406
8:00am - 5:00pm
Longer if need.

S O S Engineering
& Service
801 Country Place Dr. #114
Houston, TX 77079
(281) 679-8541

SCOTT ALAD DUPUY
361 BCR 3645
Clifton, TX 76634
254-622-4058

Star Hydraulics &
Tool Service
7012 Long Point
Houston, TX 77055
713-881-4105
800-925-7741
8-5 M-F

Star-Tex
Machinery Co., Inc.
3905 S Peachtree Road
Balch Springs, TX 75180
972-286-0863
(800) 453-1111
8-5 Mon-Fri

TESCO Equipment And
Supply Co.
1024 Walnut
Abilene, TX 79601
(325) 676-8241
8-5 M-F

Tool & Hoist Specialties
814 McKesson Dr.
Longview, TX 75604
903-759-2334
8-5 M-F

Watex Linel Inc
530 W. Richey Rd
Houston, TX 77090
(281) 587-8141
7:30 - 5:00 M-F

Webb Saw & Tool Co. Inc.
120 S. Commerce
Harlingen, TX 78550
956-425-4331

Williams Hydraulics
905 East Main St
League City, TX 77573
713-332-4247

Woodtek of El Paso
1225 Texas Avenue
El Paso, TX 79901
915-532-6448

UTAH

A. W. Fors Machine
Weld Shop
1215 South 400 West
Salt Lake City, UT 84101
801-487-4911
7:30-4

Diamond Electric Inc.
1465 South 300 West
Salt Lake City, UT 84115
801-484-4325
888-485-4325
7am-4pm M-F

Industrial Tool & Supply
839 North Main
Logan, UT 84321
435-753-4256
800-231-9665
8-6 M-S

Pratt Wagon Works
HC 74 Box 6410
Cove Fort, UT 84713
435-438-1024
8-6 M-F

Rocky Mountain Wire
Rope, Inc.
2421 S. 2570 W.
Salt Lake City, UT 84119
801-972-4972
8-5pm

VERMONT

Essex Rental &
Sales Center
26 Kellogg Road
Essex Junction, VT 05452
802-879-0767

Tool Warehouse
Outlet Inc.
1519 U.S Rt 302-Berlin
Barre, VT 05641
802-479-3363
800-462-7656
8:30-5:30 m-f

VIRGINIA

Daniel Electric Motor Serv.
3318 US Hwy 29
Danville, VA 24540
(434) 836-7148
7-5 M-F

Hydraulic Service
Company
3215 Victory Blvd.
Portsmouth, VA 23702
(757) 487-2513
800-537-9986
7:30-5

L & W Machine Inc.
3301 Lafayette Blvd. Ext.
Norfolk, VA 23513
757-857-4145
7-3:30 M-F

Machine Tool
Technicians, Inc.
4703 Mason Woods Ct.
Richmond, VA 23234
804-714-0700
(866) 688-8324

Master Tool & Machinery
119 Tilden Ave. Suite E
Chesapeake, VA 23320
(757) 547-8665

Rays Repair Inc.
4806 Commerce Dr.
Newport News, VA 23607
757-247-3718

The McGraw Group
2900 Deepwater
Terminal Rd.
Richmond, VA 23234
804-233-3071
800-288-6060
8-5 M-F

WASHINGTON

C & H Industrial, Inc.
1160 3rd Avenue
Longview, WA 98632
360-423-6496
(877) 585-8376
8-5 M-F

Center Electric Inc.
1212 South 30th Street
Tacoma, WA 98409
253-383-4416
800-521-9338
8-4:30 M-F

Cooper Electric Motor
Service
205 South 4th Avenue
Yakima, WA 98902
509-452-9550

Crane America Services
2903 NE 109th Ave Suite B
Vancouver, WA 98682
360-256-6385
7-3:30 (FIELD)
7:30-4:30(OFFICE)

Crane America Services
12322 HWY 99 # 104
Everett, WA 98204
(425) 483-3343
(800) 482-5803
7-4 M-F

F. T. Crowe & Co.
21229 84th Ave. So.
Kent, WA 98032
253-872-9696

Industrial Machinery Co.
8221 308th Ave. S.E.
Preston, WA 98050
206-222-6055

L & W Services
1090-A St. #55
Woodland, WA 98674
(360) 336-1529

Lad Enterprises, Inc.
2128 Broadway
Everett, WA 98201
(425) 348-0348
8:30-5:30 M-F

Mac & Mac Electric
1410 Iowa St.
Bellingham, WA 98226
360-734-6530
8-5 M-Th 8-4:30 Fri.

Pacific American
Commercial Co
7400 2nd Avenue
Southwest
Seattle, WA 98124
206-762-3550
7-5 M-F 8-12 Sat.

Pacific Dist.
7118 Beacon Ave. S.
Seattle, WA 98108
206-722-2610
5:30am-4pm
M-F Sat. on-call

Tool Mart
154 Marr St.
Wenatchee, WA 98801
509-664-6606
888-663-2001
8-5 M-F 9-12 Sat.

Tool Shop
1236 3rd Avenue
Longview, WA 98632
360-636-1570
8-5 M-F

Universal Repair
Shop, Inc.
1611 Boylston Ave.
Seattle, WA 98122
206-322-2726

Westcoast Tool Supply
1610 S Gold
Centralia, WA 98531
(360) 736-3203
M-F-7am-6pm Sat-9-5
Sun10-4

Westech Services Inc
2128 Broadway
Everett, WA 98201
(626) 448-8451
8-5 M-F

WEST VIRGINIA

Battery Mart
656 7TH Str
Parkersburg, WV 26101
304-424-7250
M-F 8-5 Sat. 9-12pm

Blue Ridge Machinery
& Tools
2905 Putnam Ave.
Hurricane, WV 25226
304-562-3538
800-872-6900
8-5 M/W/F 8-7 T/TH

Delta Electric, Inc.
207 Riverview Ave.
Logan, WV 25601
304-752-4625
7:30-4:30 M-F

WISCONSIN

AETNA Power Tool
Service
4622 - 68th Avenue
Kenosha, WI 53144
414-654-1170

Alferi Ind'l Sls & Service
346 Smith Street
Neenah, WI 54957
920-722-6483
8-5 M-F 8-3 Sat.

Doctor Tool Ser. Centers /
Bay Verte
975 Parkview Rd.
Green Bay, WI 54304
920-336-7440
8-6 M-Sat.

Eagle Machinery Repair
2235 N. Olde Casaloma DR.
Appleton, WI 54913
920-733-1599

Electric Motor Service Inc.
4901 Prairie Dock Dr
Madison, WI 53718
608-241-8866

Jensen Equipment
N27 W23015 Roundy Dr.
Pewaukee, WI 53072
262-547-5548

Trester Hoist &
Equipment Inc.
W136 N4863 Campbell
Dr. Suite 4
Menomonee Falls,
WI 53051
262-790-0700
800-234-6098

Woodworker Depot Inc.
2965 Ramada Way
Green Bay, WI 54304
920-336-6900
(800) 891-9003
8-6 M-F 9-4 Sat.

Gillette Repair Service
Route 8, Box 128-A
Fairmont, WV 26554
304-366-3119

Larry Pneumatic Service
100 Princeton Ave.
Bluefield, WV 24701
304-325-9262
7-5 M-F

WYOMING

Industrial Hoist & Crane
590 Signal Dr.
Rock Springs, WY 82901
(307) 382-0089
8-5 M-F 24hr call
Emergency

Lone Star Services
164 S Absaroka
Powell, WY 82435
307-754-3635
9 AM-5:30 PM



COUNTDOWN SWEEPSTAKES

WIN BIG!

WITH THE ULTIMATE YEAR-LONG GIVEAWAY!

Enter monthly for a chance to win our JET Tools Anniversary Sweepstakes and automatically be entered to win our year ending Ultimate Work Shop Grand Prize.

12 MONTHLY PRIZES!
NEW GIVEAWAYS EVERY MONTH!



1 HUGE GRAND PRIZE!
\$10,000 ULTIMATE WORKSHOP!



600 INSTANT PRIZES!
GREAT GIFTS JUST FOR ENTERING!

Sweepstakes ends December 31, 2008.

GO TO WWW.JETTOOLS.COM/ENTERNOW



Stock No. 901250
40M 6/2008
©2008 WMH Tool Group, Inc. All Rights Reserved. Printed in the U.S.A.

WMH TOOL GROUP
Elgin, IL 60124 U.S.A.
888-804-7129