

# MAXX-MOBILE

## S E R I E S

*Innovations in Ergonomics*



**MAXX-Mini Lift  
Portable Lift Table**




**MAXX-JACK  
Electric High Lift**




**MAXX-JACK  
Pallet Truck**



**MAXX-Mobile  
Tilt & Lift**

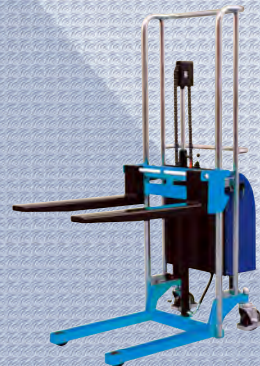


**MAXX-MINI-Lift Tote &  
Platform Lift Electric**



**MAXX-MOBILE SKID  
LIFTER  
Manual & Electric**

**LIFT PRODUCTS, INC.**



Lift Products, Inc.  
PO Box 349

Elm Grove, Wisconsin 53122-0349  
262-521-5720 • FAX 262-521-5725

Toll Free 877-LIFTPRO (877-543-8776)

[www.liftproducts.com](http://www.liftproducts.com)



**MAXX-ERGO-Lifter  
Electric**

# MAXX-MINI-LIFTS

## Portable Lift Tables

These practical and economical portable lift tables provide a convenient and cost saving solution to numerous material handling situations. The perfect answer for order picking, die handling, assembly operations or use as an efficient delivery cart. The Maxx-Mini Lifters are designed to reduce employee injuries and increase productivity. With twelve different models from which to choose from, the Maxx-Mini Lifters have proven to be indispensable in all material handling operations. Ranging in capacities from 330 lbs. up to 2,200 lbs., they can handle virtually any job, big or small.

### Standard Features

- Upper Lift Limit By Pass
- Dependable Hydraulic System
- Poly Wheels & Casters
- Quality Fit & Finish
- Brakes on Swivel Casters
- 1 Year Limited Warranty



MML-25



MML-50



MML-100



MML-30D

| PORTABLE MANUAL PUMP UP TABLES |                 |                    |                        |               |                |                      |                          |               |
|--------------------------------|-----------------|--------------------|------------------------|---------------|----------------|----------------------|--------------------------|---------------|
| Model                          | Capacity (Lbs.) | Table Size (W x L) | Table Height (Min-Max) | Handle Height | Wheel Diameter | Overall Size (W x L) | # of Pumps to Max Height | Weight (Lbs.) |
| MML-15                         | 330             | 17.75" x 27.5"     | 10" - 30"              | 39"           | 4"             | 17.75" x 37.5"       | 16                       | 90            |
| MML-25                         | 550             | 19.75" x 32.75"    | 12" - 36"              | 43"           | 5"             | 19.75" x 39.75"      | 25                       | 172           |
| MML-50                         | 1,100           | 20.5" x 39.75"     | 17" - 39"              | 44"           | 6"             | 20.5" x 46.75"       | 44                       | 260           |
| MML-75                         | 1,650           | 20.5" x 37.75"     | 17" - 39"              | 44"           | 6"             | 20.5" x 49.75"       | 55                       | 264           |
| MML-100                        | 2,200           | 20.5" x 39.75"     | 17" - 39"              | 44"           | 6"             | 20.5" x 49.75"       | 75                       | 301           |
| MML-100-XL                     | 2,200           | 31.5" x 47.25"     | 17" - 48"              | 44"           | 6"             | 31.5" x 57.25"       | 96                       | 358           |
| MML-30D                        | 660             | 20.5" x 39.75"     | 17" - 62"              | 44"           | 6"             | 20.5" x 49.75"       | 53                       | 330           |
| MML-50D                        | 1,100           | 20.5" x 39.75"     | 17" - 62"              | 44"           | 6"             | 20.5" x 49.75"       | 68                       | 370           |

Contact factory for other table top sizes.

## Portable DC Electric Lifts

### Includes:

- Rechargeable Battery
- Internal Battery
- Locking Foot Brakes



Model No. MMLE-100



Model No. MMLE-50D

These economical portable DC electric lift tables are a convenient solution to many material handling situations. The efficiency and ease of operation of an electric lift is frequency preferred over manual pump up type tables.

A simple push button control is conveniently positioned on the handle. An on board 12 Volt battery provides the power to operate the electric motor. An internal charger is fully automatic and runs on 110 Volt input.

These models are designed for order picking, die handling, assembly or anywhere lifting is required. Ergonomically placing the load at the right height minimizes the possibility of back injury and increases productivity.

| ELECTRIC LIFT TABLES |                 |                    |                        |        |
|----------------------|-----------------|--------------------|------------------------|--------|
| Model                | Capacity (Lbs.) | Table Size (W x L) | Table Height (Min-Max) | Weight |
| MMLE-100             | 2,200           | 20.5" x 39.75"     | 19.25" - 37.25"        | 375    |
| MMLE-100-XL          | 2,200           | 31.5" x 47.25"     | 17" - 48"              | 473    |
| MMLE-50D             | 1,100           | 20.5" x 39.75"     | 19.5" - 63.5"          | 436    |
| MMLE-80D             | 1,760           | 20.5" x 39.75"     | 20" - 57"              | 458    |

# MAXX-JACK High Lift

## Electric High Lift

The Maxx-Jack electric lift models are ideal for lifting skids, plastic pallets, wire baskets, or containers with open bottoms. With the optional slide on platform this unit makes a great portable lift table. The electric lift is faster and more ergonomic than pump-up models that are often only one inch per pump. The 12 volt electrical system includes a battery and charger. Push button lift and lower control is in the handle and a magnetic back remote lift/lower control with 6 ft. cord is optional. An automatic floor lock that keeps the unit from moving while in the raised position is standard. Steer wheels are 6" poly and load wheels are 3" poly.



| Model     | Capacity   | Fork Width | Fork Length | Fork ID | Lowered Height | Raised Height | Overall Length | Overall Height | Weight   |
|-----------|------------|------------|-------------|---------|----------------|---------------|----------------|----------------|----------|
| MJHLE-N22 | 2,200 Lbs. | 20.5"      | 45"         | 7.75"   | 3.25"          | 31.5"         | 62.5"          | 46.75"         | 328 lbs. |
| MJHLE-W22 | 2,200 Lbs. | 27"        | 45"         | 14"     | 3.25"          | 31.5"         | 62.5"          | 46.75"         | 350 lbs. |

Options: Slide on platform, remote control capacities are based on even load.

## Stainless Steel Electric High Lift

### Model MJHLE-W22-SS

The stainless steel MAXX-JACK Electric High Lift is ideal for lifting skids, wire baskets, plastic pallets or containers without bottom boards. The type #316 stainless steel construction is designed for applications in the pharmaceutical, food and beverage industries or anywhere that stainless steel is required.



**Standard Specification Include:** 12 Volt DC electrical system and push button lift and lower in the handle. The unit also includes a 63 amp battery and a 10 amp charger 110 Volt input.

# MAXX-MOBILE

## Skid Lifters

**Includes:**

- Rechargeable Battery
- External Charger
- Locking Foot Brakes



Rugged, practical skid lifters from LIFT PRODUCTS are ergonomically designed for lifting for lifting applications in various loactions throughout the work area. Skid lifters are used in factories, warehouse, tool rooms, machine shops...anywhere lifting is required. Any with our ergonomic design, injuries can be reduced and productivity increased.

Four models are available. The manual models are foot pump operated and the electric models are 12 Volt DC with an on board power unit that includes a battery and an on-board automatic charger that runs on 110 Volt input. All models are also available with an optional slide on platform that creates a solid work surface.

Heavy-duty skid lifter offers the stability of a 4-wheel unit. The hydraulic system has the reliability of a simple single stage lift cylinder and the chain over sprocket design features a 2 to 1 lift ratio. This concept allows for reduced effort on manual models and smooth operation on electric models.

| Model       | Capacity   | Fork OD | Fork ID | Fork Length | Lowered Height | Raised Height | Steer Wheels | Load Wheels | Weight   |
|-------------|------------|---------|---------|-------------|----------------|---------------|--------------|-------------|----------|
| MJHLS-N22   | 2,200 Lbs. | 20.75"  | 8.25"   | 45.5"       | 3.25"          | 32.75"        | 6" Poly      | 3" Poly     | 297 Lbs. |
| MJHLS-W22   | 2,200 Lbs. | 27.25"  | 14.75"  | 45.5"       | 3.25"          | 32.68"        | 6" Poly      | 3" Poly     | 317 Lbs. |
| MJHLSE-N22* | 2,200 Lbs. | 20.75"  | 8.25"   | 45.5"       | 3.25"          | 32.68"        | 6" Poly      | 3" Poly     | 446 Lbs. |
| MJHLSE-W22* | 2,200 Lbs. | 27.25"  | 14.75"  | 45.5"       | 3.25"          | 32.68"        | 6" Poly      | 3" Poly     | 477 Lbs. |

\* Battery operated electric units

Note: Electric units have a lift speed of approximately 15 seconds.

## Adjustable Work Positioners

Adjustable work positioners reduce strain and overexertion by positioning the work load at the height preferred by the user. A telescoping shaft has a safety lever that enables the user to select the most convenient height. The platform can be set at various heights and tilted to a specific angle. The MXH-15 features a foot pump lift and manual tilt positioning.



MXH-15



ML15-A



ML15-B

| Model  | Capacity | Table Height Range | Table Angle | Shelf Size   | Lip Height | Weight  |
|--------|----------|--------------------|-------------|--------------|------------|---------|
| ML15A  | 330 Lbs. | 20" - 27.5"        | 0 - 40°     | 16" x 20"    | 1.25"      | 62 Lbs. |
| ML15B  | 330 Lbs. | 28.35" - 42"       | 0 - 40°     | 16" x 20"    | 1.25"      | 66 Lbs. |
| MXH-15 | 330 Lbs  | 28" - 42"          | 0 - 40°     | 19.75" x 16" | 1.25"      | 85 Lbs. |

# MAXX-MOBILE

## Tilt & Lift

The MAXX-MOBILE TILT & LIFT provides all the features of a standard portable tilter and the added features of providing lift. This model can tilt a load up to 90°. The lift feature allows up to 11" of vertical travel. Since all users are not the same size and height and loads often vary, the lift feature provides the best ergonomic solution when loads have to be tilted for access. The tilt and lift feature operates independently allowing the user to select the right degree of tilt and the most ergonomic elevation. Model MMTL-10M is a manual hand pump up and tilt while the MMTL-10E is battery operated electric lift & tilt. Includes battery and charger.



MMTL-10M



MMTL-10E



| Model  | Capacity   | Fork Width | Fork Length | Lowered Height | Tilt/Lift | Weight   |
|--|------------|------------|-------------|----------------|-----------|----------|
| MMTL-10M                                       | 2,200 Lbs. | 22"        | 31.5"       | 3.35"          | 90°/11"   | 392 Lbs. |
| MMTL-10E                                       | 2,200 Lbs. | 22"        | 31.5"       | 3.35"          | 90°/11"   | 442 Lbs. |
| NOTE: *Fork ID 9.2"                            |            |            |             |                |           |          |
| NOTE: * Battery with external charger included |            |            |             |                |           |          |

## MAXX-MINI-LIFT Tote & Platform Lift

This weight highly maneuverable platform lift is ideal for order picking or general material handling. Its quick lift pump with fold up pedal allows quick and easy height adjustment. With a capacity of up to 880 lbs., this unit can handle most jobs. It features poly wheels with brakes on swivel casters. The reliable hydraulic lift cylinder is chrome and includes overload protection. The MMSE-30 is electric battery lift with on-board battery and charger.



MMS-20



MMS-30



MMSE-30



Optional Platform

| MAXX-MINI-LIFT TOTE & PLATFORM LIFT - MANUAL   |          |               |              |          |
|--|----------|---------------|--------------|----------|
| Model  | Capacity | Platform Size | Table Height | Weight   |
| MMS-20   | 440 Lbs. | 20" x 24"     | 8" - 33"     | 99 Lbs.  |
| MMS-30   | 660 Lbs. | 25" x 22.75"  | 8.875" - 53" | 183 lbs. |
| MAXX-MINI-LIFT TOTE & PLATFORM LIFT - ELECTRIC |          |               |              |          |
| Model  | Capacity | Fork Length   | Lift Height  | Weight   |
| MMSE-30  | 660 Lbs. | 22"           | 58"          | 290 Lbs. |

Optional Platform for MMSE-30 (25.9" x 22.8") available.

# MAXX-ERGO-Lifter

The MAXX-ERGO Lifter is a highly maneuverable light capacity lifter designed for multiple handling applications. It is equipped with a standard platform and has a load capacity of 330 lbs. Ideal for assembly operations, ergonomic applications and other material handling needs.

The MAXX-ERGO-Lifter features a lift/lower button on a flexible control cord that allows the operator to be in the most comfortable position while lifting or lowering loads. The electric lift is battery operated and features an on board charger that runs on 110 volt input. Also available are five optional attachments that customize the unit for specific applications including roll and coil handling attachments and a tote lifter attachment that are bolted on permitting the unit to be changed back to the standard platform when required.



|                         |                            |
|-------------------------|----------------------------|
| Model                   | MXE-150                    |
| Capacity                | 330 lbs. at 9" Load Center |
| Maximum Platform Height | 59"                        |
| Lowered Height          | 5"                         |
| Straddle ID             | 18.75"                     |
| Straddle OD             | 23.25"                     |
| Platform Size           | 18.5" x 23.5"              |
| Overall Size            | 35" x 23.5" x 70"          |
| Steer Wheels            | 5" Swivel with Brake       |
| Load Wheels             | 3" Swivel                  |
| Battery                 | 24 Volt Maintenance Free   |
| Charger                 | Auto On-Board              |



Attachment A-1 is used for rolls or coils that require lifting from underneath. Ideal for placing rolls on and off a shaft.



Attachment A-2 is a single ram suited for lifting coils or rolls through the core. The ram length is 24" long and 2" in diameter.



Attachment A-3 is a dual ram arrangement. The ram length is 17.75" long and 2" in diameter. The distance between the rams is 6". It can be used to cradle rolls or can handle two small rolls at one time through the core.



Attachment A-4 is a roll handling attachment designed to handle rolls in the vertical and horizontal position (poker chip position). The unit features an expandable ram that hold the roll by expanding in the core and turning the wheel pictured. The ram is 11" long and is 2.9" in diameter.


# MAXX-JACK

## Premium Pallet Truck

- 5,500 lb. Capacity
- Adjustable Push Rods
- Poly or Nylon Wheels (Nylon Standard)
- Hand Control
- Fork Entry Rollers
- Quality Hydraulic Pump with Built-In Overload Valve
- Heavy Duty Reinforced Forks with Gussets to Prevent Fork Spreading
- One Year Warranty



## Standard Features



**Adjustable Push Rods** keep fork alignment even after years of use.



Comes standard with **Nylon Wheels**. Poly wheel with steel hub optional.



**Fork Entry and Exit Roller** allows for easy pallet entry and exit.



**Control Handle** with convenient "lift," "lower" and "neutral".

| Model    | Capacity (Lbs.) | Fork Width | Fork Length | Between Forks | Lowered Height | Raised Height | Weight (Lbs.) |
|----------|-----------------|------------|-------------|---------------|----------------|---------------|---------------|
| MJ55-N48 | 5,500           | 20.5"      | 48"         | 8"            | 2.9"           | 8"            | 174           |
| MJ55-W48 | 5,500           | 27"        | 48"         | 14.5"         | 2.9"           | 8"            | 180           |

Options - Skid Lifter  
- Load Backrest 48" or 60" High

# LIFT PRODUCTS INC.

INNOVATIONS IN ERGONOMICS



Lifting Solutions

For Every Space

PO Box 349 • Elm Grove, Wisconsin 53122-0349 • Tel 262-521-5720 • Fax 262-521-5725 • TOLL FREE 877-LIFTPRO (877-543-8776)  
www.liftproducts.com • lpi@liftproducts.com



## MAX-XL Heavy Lift



The new Max-XL Lift Table is designed for heavy lift requirements. Featuring:

- 3 HP Heavy Duty Motor (internal)
- 5" lift cylinders with Teflon Seals
- 1-1/2" x 8" solid scissor arms
- Magnetic backed push button control on 10 ft cord
- Built in safety bars



| Model       | Capacity | Edge Load | Platform Sizes |         | Base Frame | Lower | Raised | Speed  | # of Cylinder |
|-------------|----------|-----------|----------------|---------|------------|-------|--------|--------|---------------|
|             |          |           | STD            | MAX     |            |       |        |        |               |
| XLPT-080-36 | 8,000    | 7,000     | 36 x 48        | 48 x 72 | 36 x 48    | 9.5   | 44     | 29 sec | 2             |
| XLPT-100-36 | 10,000   | 7,000     | 36 x 48        | 48 x 72 | 36 x 48    | 9.5   | 44     | 44 sec | 3             |

Internally mounted 3 hp, 115/230V 1-60 or 230/460 3-60 intermittent duty TEV super torque motor.  
Specify voltage:  
115V operating control voltage.  
NEMA constant pressure. Magnet backed up-down push button control station with 10' straight or coiled cord.  
NEMA 1 painted controls and electrical connectors. Control box contains contacts; control transformer; thermal overload and fuse.  
All controller components meet UL and/or CSA specifications.  
Cylinder with internal steps.  
10 ft. power cord. (connector not included)  
Hard, chrome plated, polished shafting hydraulic cylinder piston rod.  
Surfaces degreased, descaled and finished with Safety Yellow and Lift Products, Inc. products are covered by Patents Pending and other rights reserved.  
Smooth steel top with yellow and black safety stripes.  
S.A.E. hoses and fittings.  
Integral safety restraint maintenance bar.  
Internal gear pump with check valve, relief valve, solenoid valve. Includes hydraulic oil and filter.  
Limited Warranty:  
90 day repair or replacement on total product; 90 days on electrical components, except motors. 5 years or 100,000 cycles on bearings. 5 years on structural.  
Specifications are subject to change without notice. Consult your dealer for current information.

OPTIONS:  
Foot control switch with a 10' cord.  
Accel/Slam or Roller Control Slitting.  
Tipped Top Guards for Pallet Mounting.  
Bearing Top.  
Cotton or Flanged Wheels.  
Semi-lux with Jack Handles.  
Special Controls.  
All Stainless Steel Top.  
Push-button Safety Bar.  
Other Options Available.  
Contact Factory for Special Requirements.

# MOTO-CART



Shelving Carts

Moto-Cart Self Propelled Electric Cart

Cylinder Carts

## MOTO-CART JR.



Moto-Cart Jr. Tote Rack  
LIFT PRODUCTS, INC.



Moto-Cart Jr.

## Moto Cart Jr

Self Propelled Electric Carts  
Innovations in Ergonomics



Electric Travel, Manual Lift

Electric Travel & Lift

## LIFT PRODUCTS, INC.

PO Box 349 • Elm Grove, Wisconsin 53122-0349  
262-521-5720 • FAX 262-521-5725 • Toll Free 877-LIFTPRO (877-543-8776)  
www.liftproducts.com • email lpi@liftproducts.com